5-6115-275-24 P

ARMY TECHNICAL MANUAL **TM 5-6115-275-24P**
NAVY PUBLICATION **NAVFAC P-8-615-24P**
AIR FORCE TECHNICAL ORDER **TO 35C2-3-452-4**

TECHNICAL MANUAL

ORGANIZATIONAL, INTERMEDIATE (FIELD)
(DIRECT AND GENERAL SUPPORT)
AND DEPOT MAINTENANCE REPAIR PARTS
AND SPECIAL TOOLS LIST

GENERATOR SET, GASOLINE ENGINE DRIVEN, SKID MOUNTED, TUBULAR FRAME, 10KW, AC, 120/208V, 3 PHASE AND 120/240V, SINGLE PHASE, (LESS ENGINE)

DOD MODEL	*CLASS*	*HERTZ*	*NSN*
MEP-018A	UTILITY	60	6115-00-889-1447
MEP-023A	PRECISE	400	6115-00-926-0843

This copy is a reprint which includes current pages from Changes 1 through 3.

NEWARK PUBLIC LIBRARY

AUG 22 1989

U.S. GOVT. PUBS
DEPOSITORY 376

PUBLISHED UNDER THE AUTHORITY OF THE DEPARTMENTS OF THE ARMY, AIR FORCE, AND NAVY
JUNE 1977

D 101.11:

READEX MICRO best copy available

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C2-3-452-4
C 3

CHANGE NO. 3

HEADQUARTERS
DEPARTMENTS OF THE ARMY, NAVY, AND AIR FORCE
WASHINGTON, D.C., 30 January 1987

Organizational, Intermediate (Field)
(Direct and General Support)
and Depot Maintenance Repair Parts
and Special Tools List

GENERATOR SET, GASOLINE ENGINE DRIVEN,
SKID MOUNTED, TUBULAR FRAME, 10KW, AC,
120/208V, 3 PHASE AND 120/240V,
SINGLE PHASE (LESS ENGINE)

DOD MODEL	CLASS	HERTZ	NSN
MEP-018A	UTILITY	60	6115-00-889-1447
MEP-023A	UTILITY	400	6115-00-926-0843

TM 5-6115-275-24P/NAVFAC P-8-615-24P/TO 35C2-3-452-4, 1 June 1977, is changed as follows:

1. Title is changed as shown above.

2. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
1 through 22	1 through 22
24.1 through 24.4	24.1 through 24.4
25 through 34	25 through 34
43 and 44	43 and 44
47 and 48	47 and 48
51 and 52	51 and 52
59 and 60	59 and 60
69 through 78	69 through 78

3. Retain this sheet in front of manual for reference purposes

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C2-3-452-4
C 3

By Order of the Secretaries of the Army, the Navy, and the Air Force:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

J. P. JONES, JR.
Rear Admiral, CEC, US Navy
Commander
Naval Facilities Engineering Command

CHARLES A. GABRIEL, *General USAF*
Chief of Staff

Official:

EARL T. O'LOUGHLIN
General, USAF, Commander, Air Force
Logistics Command

GEORGE B. CRIST
Lieutenant General, USMC
Deputy Chief of Staff for Installations and Logistics

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25A, Organizational, Direct Support and General Support Maintenance requirements for Generator Set, Gas Driven, 120/208V, 120/240V, 28V DC, 3KW, 60/400HZ, 3PH (MEP-016A, MEP-021A, MEP 026A) (TM 5-6115-271 Series)

URGENT

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C-3-452-4
C 2

CHANGE NO. 2

HEADQUARTERS
DEPARTMENTS OF THE ARMY, NAVY, AND AIR FORCE
WASHINGTON, D.C., *2 July 1982*

Organizational, Intermediate (Field)
(Direct and General Support)
and Depot Maintenance Repair Parts
and Special Tools List

GENERATOR SET, GASOLINE ENGINE DRIVEN,
SKID MOUNTED, TUBULAR FRAME, 10KW, AC,
120/208V, 3 PHASE AND 120/240V,
SINGLE PHASE (LESS ENGINE)

DOD MODEL	CLASS	HERTZ	NSN
MEP-018A	UTILITY	60	6115-00-889-1447
MEP-023A	PRECISE	400	6115-00-926-0843

TM 5-6115-275-24P/NAVFAC P-8-615-24P/TO 35C2-3-452-4, 1 June 1977, is changed as follows:

1. Remove and insert pages as indicated below.

	Remove pages	Insert pages
Section II	24.1 thru 24.4	24.1 thru 24.4

2. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

3. Retain these sheets in front of manual for reference purposes.

URGENT

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C-3-452-4
C 2

By Order of the Secretaries of the Army, the Navy, and the Air Force:

E. C. MEYER
General, United States Army
Chief of Staff

Official:

ROBERT M. JOYCE
Brigadier General, United States Army
The Adjutant General

W. M. ZOBEL
Rear Admiral, CEC, U.S. Navy
Commander
Naval Facilities Engineering Command

LEW ALLEN, JR., *General, USAF*
Chief of Staff

Official:

JAMES P. MULLINS
General, USAF, Air Force
Logistics Command

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25D, Organizational Maintenance Requirements for Generator Sets, Engine Driven, 10 KW 60 HZ, and 10 KW 400 HZ.

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C-3-452-4
C 1

CHANGE
No. 1

HEADQUARTERS
DEPARTMENTS OF THE ARMY, NAVY & AIR FORCE
WASHINGTON D.C., 27 January 1982

Organizational, Intermediate (Field)
(Direct and General Support)
and Depot Maintenance Repair Parts
and Special Tools List

GENERATOR SET, GASOLINE ENGINE DRIVEN,
SKID MOUNTED, TUBULAR FRAME, 10KW, AC,
120/208V, 3 PHASE and 120/240V,
SINGLE PHASE, (LESS ENGINE)

DOD MODEL	CLASS	HERTZ	NSN
MEP-018A	UTILITY	60	6115-00-889-1447
MEP-023A	PRECISE	400	6115-00-926-0843

Current as of 20 August 1981

TM 5-6115-275-24P/NAVFAC P-8-615-24P/TO 35C2-3-452-4, 1 June 1977, is changed as follows:

1. Remove and insert pages as indicated below.

2. New or changed text is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

	Remove pages	Insert pages
Section II.	21 and 22	21 and 22
		22.1 and 22.2
	23 and 24	23 and 24
		24.1 and 24.2
	25 and 26	25 and 26
		56.1 and 56.2
		58.1 and 58.2

3. Retain these sheets in front of manual for reference purposes.

TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C-3-452-4
C 1

By Order of the Secretaries of the Army, the Navy, and the Air Force:

E. C. MEYER
General, United States Army
Chief of Staff

Official:

ROBERT M. JOYCE
Brigadier General, United States Army
The Adjutant General

W. M. ZOBEL
Rear Admiral, CEC, U.S. Navy
Commander
Naval Facilities Engineering Command

LEW ALLEN, JR., *General, USAF*
Chief of Staff

Official:

BRYCE POE II
General, USAF, Commander, Air Force
Logistics Command

Distribution:

To be distributed in accordance with DA Form 12-25D, Operator Maintenance requirements for Generator Sets, Engine Driven 10 KW 60 HZ, and 10 KW 400 HZ.

DEPARTMENT OF THE ARMY TECHNICAL MANUAL
DEPARTMENT OF THE NAVY PUBLICATION
DEPARTMENT OF THE AIR FORCE TECHNICAL ORDER

*TM 5-6115-275-24P
NAVFAC P-8-615-24P
TO 35C2-3-452-4

HEADQUARTERS
DEPARTMENT OF THE ARMY, NAVY & AIR FORCE
WASHINGTON, D.C. *1 June 1977*

ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

GENERATOR SET, GASOLINE ENGINE DRIVEN, SKID MOUNTED, TUBULAR FRAME, 10KW, AC, 120/208V, 3 PHASE AND 120/240V, SINGLE PHASE, (LESS ENGINE)

DOD MODEL	*CLASS*	*HERTZ*	*NSN*
MEP-018A	**UTILITY**	**60**	**6115-00-889-1447**
MEP-023A	**UTILITY**	**400**	**6115-00-926-0843**

Current as of 18 February 1977

TABLE OF CONTENTS

			Page	Illus. Fig.
SECTION	I.	INTRODUCTION		
	II.	REPAIR PARTS LIST		
Group	01.	Engine Assembly:		
		Engine, Oil Drain and Muffler MEP-018A	1	1
		Muffler and Bracket MEP-023A	1	2
		Oil Drain MEP-023A	2	3
	02.	Fuel System:		
		Fuel Tank, Bracket and Lines MEP-018A	2	4
		Fuel Tank, Lines and Fittings MEP-023A	3	5
		Fuel Tank Adapter	4	6
		Fuel Valve, and lines MEP-018A	4	7
		Fuel Filter Element and Fittings MEP-018A	5	8
		Fuel Valve, Hose and Fittings (MEP-023A)	6	9
		Fuel Line Assembly (For serial number range MA68-0001 thru MA68-2987)	6	9A
	03.	Batteries and Cables:		
		Batteries and Cables MEP-018A	7	10
		Battery, Battery Frame and Cables MEP-023A	8	11
	04.	Electrical Panels and Controls:		
		Control Box, Engine and Main Generator Cables MEP-018A	10	12
		Control Panel MEP-018A	10	13
		Control Cabinet Components MEP-018A	12	14
		Control Cabinet and Components MEP-018A	15	15
		Control Panel Assembly and Ground Strap MEP-023A	18	16
		Instrument Panel and Related Parts MEP-023A	18	17
		Circuit Breaker and Terminal Boards MEP-023A	20	18
		Selector Switch, Converter and Receptacle MEP-023A	22	19
		Relay Panel MEP-023A	22	20
		Control Box, Capacitors, Transformer and Resistors MEP-023A	23	21
	05.	Generator Assembly:		
		Generator Frame and Stator MEP-018A	25	22
		Drive Coupling, Rotor and Components MEP-018A	25	23
		Generator MEP-023A	27	24
	06.	Frame Assembly:		
		Tool Box, Lifting Eye, Baffle and Bracket MEP-018A	29	25
		Tool Box, Bracket and Lifting Eye MEP-023A	30	26

* This manual supersedes TM 5-6115-275-25P, 10 December 1968, including all changes and TM 5-6115-450-25P, 2 July 1968, including all changes.

			Page	Illus. Fig.
Group		Auxiliary Battery Receptacle MEP-018A	31	27
		Auxiliary Battery Receptacle MEP-023A	32	28
		Skid Base and Components MEP-018A	32	29
		Guard, Lifting Bracket and Fan Cover MEP-023A	33	30
		Engine and Generator Mounts MEP-023A	34	31
		Skid Frame, Drip Pan and Bracket MEP-023A	35	32
SECTION	III.	SPECIAL TOOL LIST (NOT APPLICABLE)		
	IV.	NSN & REFERENCE NUMBER INDEX	70	

SECTION I.
INTRODUCTION

1. Scope. This joint Army, Navy and Air Force manual lists repair parts and special tools required for the performance of organizational, intermediate (field), direct and general support and depot maintenance of the generator set. The following paragraphs are keyed to applicable users. All users should read paragraph 4, Special Information, prior to using this manual.

NOTE: (Army) Repair parts listed represent those authorized for use at indicated maintenance levels and will be requisitioned on an "as required" basis until stockage is justified by demand in accordance with AR 710-2.

NOTE: (Army) Organizational Maintenance personnel are to extract the maintenance coded "O" items they require from Section II, Column (2), Third and/or Fourth Position of the Direct and General Support Repair Parts and Special Tools List.

2. General. This Repair Parts and Special Tools Lists is divided into the following sections:

a. (ALL) Repair Parts — Section II. A list of repair parts authorized for the performance of maintenance at the organizational intermediate (field), direct support, general support and depot level in figure and item number sequence.

b. (ALL) Special Tools, Test and Support Equipment — Section III. (Not Applicable)

c. National Stock Number and Reference Number Index — Section IV. A list of National stock numbers in numerical sequence, followed by a list of reference numbers appearing in all the listings, in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

3. Explanation of Columns. The following provides and explanation of columns in the tabular lists in Sections II and III.

a. (ALL) Illustrations (Column 1). This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* Indicates the number used to identify the item on the illustration.

b. (ALL) Source, Maintenance and Recoverability Codes (SMR) (Column 2).

(1) Uniform Source Codes applicable to all Military Services.

GENERAL: Source Codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	Definition
PA	Item procured and stocked for anticipated or known usage.
PB	Item procured and stocked for insurance purposes because essentiality dictates that a minimum quantity be available in the supply systems.
PC	Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature.
PD	Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.
PE	Support equipment procured and stocked for initial issue or outfittings to specified maintenance repair activities.
PF	Support equipment which will not be stocked but which will be centrally procured on demand.
PG	Item procured and stocked to provide for sustained support for the life of the equipment. It is applied to an item peculiar to the equipment which because of probable discontinuance or shutdown of production facilities would prove uneconomical to reproduce at a later time.
KD	An item of depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items requird at the time of overhaul or repair.
KF	An item of maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance.
KB	Item included in both a depot overhaul/repair kit and a maintenance kit.
MO	Item to be manufactured or fabricated at organizational level.
MF	Item to be manufactured or fabricated at intermediate maintenance levels. Air Force — Intermediate (*) Army — General Support (*) Navy — Ashore
MG	Item to be manufactured or fabricated at both afloat and ashore intermediate maintenance levels—Navy use only.
MD	Item to be manufactured or fabricated at depot maintenance level.
AO	Item to be assembled at organization level.
AF	Item to be assembled at intermediate maintenance levels. Air Force — Intermediate (*) Army — Direct Support (*) Navy — Afloat
(*) NOTE:	For USAF and USA Safeguard Program, only Code "F" will be used to denote intermediate maintenance. On joint programs, use of either code F or H by the joining service will denote intermediate maintenance in USAF and USA Safeguard Program.
AH	Item to be assembled at intermediate maintenance levels. Air Force — Intermediate (*) Army — General Support (*) Navy — Ashore
AG	Item to be assembled at both afloat and ashore intermediate level — Navy use only.
AD	Item to be assembled at depot maintenance levels.
XA	Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.

Code	Definition
XB	Item is not procured or stocked. If not available through salvage, requisition.
XC	Installation drawings, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

(*) NOTE: For USAF and USA Safeguard Program, only Code "F" will be used to denote intermediate maintenance. On joint programs, use of either code F or H by the joining service will denote intermediate maintenance in USAF and USA Safeguard Program.

(2) Uniform Maintenance Codes applicable to all Military Services:

GENERAL: Maintenance Codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The Maintenance Codes are in the third and fourth position of the Uniform SMR Code Format.

(*a*) USE (third position): The Maintenance Code entered in the third position indicates the lowest level maintenance level authorized to remove, replace, and use the support item. The Maintenance Code entered in the third position indicates one of the following levels of maintenance.

Code	Application/Explanation
O	Support item is removed, replaced, used at the organizational level of maintenance.
F	Support item is removed, replaced, used at the following intermediate levels. USAF — Intermediate (*) USA — Direct Support (*) USN — Afloat
G	Support item is removed, replaced, used at both afloat and ashore intermediate levels: Navy only.
H	Support item is removed, replaced, used at the following intermediate levels.

(*) NOTE: For USAF and USA Safeguard Program, only Code "F" will be used to denote intermediate maintenance. On joint programs, use of either code F or H by the joining service will denote intermediate maintenance in USAF and USA Safeguard Program.
USAF — Intermediate (*)
USA — General Support (*)
USN — Ashore (only)

D	Support items that are removed, replaced, used at Depot only. USAF — Depot, Mobile Depot and Specialized Repair activity. USA — Depot, Mobile Depot and Specialized Repair activity. USN — Aviation Rework. Avionics and Ordinance Facilities and Shipyards.

(*b*) REPAIR (fourth position): The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions).

Code	Application/Explanation
O	The lowest maintenance level capable of complete repair of the support item is the organizational level.
F	The lowest maintenance level capable of complete repair of the support item is the following intermediate level: USAF — Intermediate (*) USA — General Support (*) USN — Ashore (only)
H	The lowest maintenance level capable of complete repair of the support item is the following intermediate level: USAF — Intermediate (*) USA — General Support (*) USN — Ashore (only)

(*) NOTE: For USAF programs and the USA Safeguard Program, Code F will be used to denote intermediate maintenance. On joint programs, use of either Code F or H by the joining Service will denote intermediate maintenance to USAF and the USA Safeguard Program.

G	Both afloat and shore intermediate levels are capable of complete repair of support item: Navy only.
D	The lowest maintenance level capable of complete repair of the support item is the depot level. USAF — Depot, Mobile Depot, and Specialized Repair activity. USA — Depot, Mobile Depot, and Specialized Repair Activity. USN — Aviation Rework, Avionics and Ordnance Facilities, Shipyards.
L	Repair restricted to designated specialized Repair Activity.
Z	Nonreparable. No repair is authorized.
B	No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item.

(3) Uniform Recoverability Codes applicable to all Military Services:

GENERAL: Recoverability Codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the uniform SMR Code Format as follows:

Recoverability Codes	Definition
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in column 3.
O	Reparable item. When uneconomically reparable, condemn and dispose at organizational level.
F	Reparable item. When uneconomically reparable, condemn and dispose at the following intermediate levels: USAF — Intermediate (*) USA — Direct Support (*) USN — Afloat
H	Reparable item. When uneconomically reparable, condemn and dispose at the following levels: USAF — Intermediate (*) USA — General Support (*) USN — Ashore

(*) NOTE: For USAF programs and the USA Safeguard Program, Code F will be used to denote intermediate maintenance. On joint programs, use of either Code F or H by the joining Service will denote intermediate level of USAF and the USA Safeguard Program.

Recoverability Codes	Definition
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
L	Reparable item. Repair, condemnation and disposal not authorized below depot/Specialized Repair Activity level.
A	Item requires special handling or condemnation procedure because of specific reasons (i.e., precious metal content, high-dollar value, critical material or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. (USMC) Special Stockage Indicator Code and Replacement Factor (Column 3). (Not Applicable)

d. (ALL) National Stock Number (Column 4). Indicates the National Stock Number assigned to the item and will be used for requisitioning purposes.

e. (ALL) Description. Indicates the Federal item name and any additional descriptions of the item required. The abbreviation "w/e" when used as part of the nomenclature, indicates that the National Stock Number includes all armament, equipment, accessories and repair parts issued with the item. A part number or other reference number is followed by the applicable five digit Federal Supply Code for manufacturer in parentheses. If two reference numbers and Federal Supply Codes for manufacturer are listed, the first listing refers to the Department of Defense Drawing Number, the second listing refers to the actual part manufacturer. Items that are included in kits and sets are listed below the name of the kit or set with the quantity of each item in the kit or set indicated in the quantity incorporated in unit column.

f. (ALL) Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc.). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

g. (ALL) Quantity Incorporated in Unit. Indicates the quantity of the item used in the assembly group. A "V" appearing in this column in lieu of a quantity indicates that a definite quantity cannot be indicated (e.g., shims, spacers, etc.).

4. Special Information.

a. (ALL) Identification of the usable on codes of this publication are:

Code	Used On
A	DOD Model MEP-018A
B	DOD Model MEP-028A

Repair parts not symbolized are applicable to all models covered in this manual.

b. (Army) Parts which require manufacture or assembly at a level higher than that authorized for installation will indicate in the source column, the higher level.

c. Stockage Information.

(1) Air Force stockage information is contained in Initial Supply Support Lists issued separately from this publication by Sacramento Air Logistics Center in accordance with AFM 67.1, part 1, chapter 12.

(2) Navy stockage objectives are contained in Consolidated Shipboard Allowance List as furnished separately from this publication by the Ship Parts Control Center.

5. How to Locate Repair Parts

a. (ALL) When National Stock Number or reference number is unknown:

(1) Using the table of contents, determine the functional group; i.e., batteries and related parts, exhaust and breather pipes, within which the repair part belongs. This is necessary since illustrations are prepared for functional groups, and listings are divided into the same groups.

(2) Find the illustration covering the functional group to which the repair part belongs.

(3) Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. (ALL) When National Stock Number or reference number is unknown:

(1) Using the Index of National Stock Numbers and Reference Numbers, find the pertinent National Stock Number or reference number. This index is in ascending NSN sequence followed by a list of reference numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

AC	alternating current
AMP	amperage
AWG	American Wire Gage
BRS	brass
CAD PLD	cadmium plated
CD	circuit description
CRES	corrosion-resistant steel
CS	case
DC	direct current
DIA	diameter
EA	each
GPH	gallons per hour
ID	inside diameter
IN	inch(s)
INTL	internal
LG	long, length
LH	left hand
MM	millimeter
MTG	mounting
NOM	nominal
NPT	National taper pipe

6. Abbreviations (Cont'd)

NPTF	tight joints
OHM	ohmmeter
OD	outside diameter
PLD	plated
RH	right hand
THD	thread
THK	thick
TY	type
UNC	unified coarse thread
UNF	unified fine thread
V	volt

7. Reporting of Errors. You can help to improve this manual by calling attention to errors and by recommending improvements. Your letter, DA Form 2028 (Recommended Changes to Publications), and/or DA Form 2028-2 (Recommended Changes to Equipment Technical Manuals), may be used. Copies of DA Form 2028-2 are attached in the back of the manual for your use. Please mail your recommended changes directly to:

a. Army DA Form 2028, direct to: Commander, U.S. Army Troop Support Command, ATTN: DRSTS-MPP, 4300 Goodfellow Blvd., St. Louis, Missouri 63120. A reply will be furnished directly to you.

b. Air Force AFTO Form 22 in accordance with T.O. 00-5-1, direct to: Commander, Sacramento Air Material Area, ATTN: MMST McClellan AFB, California 95652.

c. Navy Letter, direct to: Commanding Officer, U.S. Navy Ship Parts Control Center, ATTN: Code 783, Mechanicsburg, PA 17055.

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. ESI	b. REFL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
									SECTION II — REPAIR PARTS LIST			
									GROUP 01 — ENGINE ASSEMBLY			
1	1	PACZZ	PAOZZ	PAOZZ				6115-00-066-4933	COVER, GENERATOR SET: TARPAULIN 13211E6769 97403	A	EA	1
1	2	PAOZZ	PAOZZ	PAOZZ				5310-00-061-7326	NUT, SELF-LOCKING, HEXAGON, MUFFLER GUARD MTG MS21045-3 96906	A	EA	2
1	3	PAOZZ	PAOZZ	PAOZZ				5306-00-150-9221	BOLT, MACHINE: MUFFLER GUARD MTG AN3-3A 88044	A	EA	1
1	4	PAOZZ	PAOZZ	PAOZZ				5306-00-274-2119	BOLT, MACHINE: MUFFLER GUARD MTG AN3 5A 88044	A	EA	1
1	5	PAOZZ	PAOZZ	PAOZZ				5310-00-576-5752	WASHER, LOCK: MUFFLER GUARD MTG MS35333-39 96906	A	EA	2
1	6	XBOZZ	PAOZZ	PAOZZ				2990-00-195-5609	GUARD, MUFFLER 13211E4873 97403	A	EA	1
1	7	PAOZZ	PAOZZ	PAOZZ				5305-00-115-9526	SCREW, CAP, HEXAGON HEAD: MUFFLER MTG MS35291-58 96906	A	EA	2
1	8	PAOZZ	PAOZZ	PAOZZ				5310-00-595-7237	WASHER, LOCK: MUFFLER MTG MS35333-42 96906	A	EA	2
1	9	PAOZF	PAOZZ	PAOZZ				2990-00-056-4628	MUFFLER ASSEMBLY, EXHAUST 13211E4870 97403	A	EA	1
1	10	PAOZZ	PAOZZ	PAOZZ				5330-00-056-8066	GASKET: MUFFLER MTG 13211E6773 97403	A	EA	1
1	11	PAOZZ	PAOZZ	PAOZZ				4730-00-188-3515	PLUG, PIPE: ENGINE OIL DRAIN MS20913-4 96906	A	EA	1
1	12	XBOZZ	PAOZZ	PAOZZ					FITTING ASSEMBLY: ENGINE OIL DRAIN 13211E4914 97403	A	EA	1
1	13	PAOZZ	AFOZZ	PAOZZ				4720-00-913-6422	HOSE ASSEMBLY, RUBBER: ENGINE OIL DRAIN 13211E4918 97403	A	EA	1
1	14	PAOZZ	PAOZZ	PAOZZ					VALVE, PLUG: OIL DRAIN SHUTOFF 13211E4915 97403	A	EA	1
1	15	XBOZZ	PAOZZ	PAOZZ				4730-00-022-2499	COUPLING, PIPE: ENGINE OIL DRAIN VALVE 13211E4919 97403	A	EA	1
1	16	PAOZZ	PAOZZ	PAOZZ				4730-00-278-4603	ADAPTER, STRAIGHT: ENGINE OIL DRAIN VALVE 13211E4916 97403	A	EA	1
1	17	PAOZZ	PAOZZ	PAGZZ				3330-00-921-6224	GASKET: OIL PAN TO DRAIN ADAPTER ERJB200 81336	A	EA	1
1	18	PAFZL	PAFFF	PDOHH				2805-00-952-3926	ENGINE, GASOLINE: MILITARY STANDARD MODEL 4A084-11 (OPTIONAL W/MODEL 4A084-111) 4A084-2 81336		EA	1
1	18	PAFZL	PAFFF	PDOHH				2805-00-872-5972	ENGINE, GASOLINE: MILITARY STANDARD MODEL 4A084-111 (OPTIONAL W/MODEL 4A084-11) 4A084-3 81336		EA	1
2	1	PACZZ	PAOZZ	PAOZZ				6115-00-760-5458	COVER, GENERATOR SET: TARPAULIN 13216E1919 97403	B	EA	1
2	2	PAOZZ	PAOZZ	PAOZZ				5305-00-068-0501	SCREW, CAP, HEXAGON HEAD: STRAP MTG MS90725-5 96906	B	EA	2
2	3	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK: STRAP MTG MS35338-44 96906	B	EA	2
2	4	XBOZZ	XBOZZ	XBGZZ					STRAP, MUFFLER: MUFFLER MTG 13211E6747 97403	B	EA	1
2	5	XOBZZ	XBOZZ	XBGZZ					BRACKET, MUFFLER: MUFFLER MTG 13211E6746 97403	B	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
2	6	XBOZZ	XBOZZ	XBGZZ					NUT, WELD: MUFFLER BRACKET 13211E6716-1 97403	B	EA	2
2	7	PAOZZ	PAOZZ	PAOZZ				5310-00-732-0558	NUT, HEXAGON, MACHINE: MUFFLER MTG MS51967-8 96906	B	EA	2
2	8	PAOZZ	PAOZZ	PAOZZ				5310-00-637-9541	WASHER, LOCK: MUFFLER MTG MS35338-46 96906	B	EA	2
2	9	PAOZZ	PAOZZ	PAOZZ				5305-00-269-3213	SCREW, CAP, HEXAGON HEAD: MUFFLER MTG MS90725-62 96906	B	EA	2
2	10	PAOZZ	PAOZZ	PBHZZ				2990-00-995-1104	MUFFLER, EXHAUST 13216E1916 97403	B	EA	1
2	11	PAOZZ	PAOZZ	PAGZZ				5330-00-056-8066	GASKET: MUFFLER MTG 13211E6773 97403	B	EA	1
3	1	MOOZZ	AFFFF	AGGGG					OIL DRAIN ASSEMBLY 102B592 44940	B	EA	1
3	2	PAOZZ	AFFFF	AGGGG				5336-00-522-1880	PLUG ASSEMBLY: OIL DRAIN 13211E6744 97403	B	EA	1
3	3	PAOZZ	PAOZZ	PAGZZ				5305-00-253-5621	SCREW, DRIVE ROUND HEAD: NO. 6, PLUG RETAINING 1/2 IN. LG MS21318-30 96906	B	EA	1
3	4	PAOZZ	PAOZZ	PAGZZ				4010-00-554-8661	CHAIN, SAFETY: BRASS, NO. 0, TYPE 2, PLUG RETAINING MS17311-1 96906	B	EA	1
3	5	PBOZZ	XBOZZ	PAGZZ				4820-00-142-2663	PLUG, OIL DRAIN WW-P-471 81349	B	EA	1
3	6	PAOZZ	PAOZZ	PAGZZ				5940-00-114-1314	LUG, TERMINAL, CRIMP: CHAIN MS20659-129 96906	B	EA	1
3	7	PAOZZ	PAOZZ	PAGZZ				4820-00-136-1085	COCK, SHUT-OFF 13211E6742 97403	B	EA	1
3	8	PAOZZ	PAOZZ	PAGZZ				4730-00-188-1849	NIPPLE, PIPE: 1/2 IN. NPT 2-1/2 IN. LG WW-N-351 81349	B	EA	1
3	9	PAOZZ	PAOZZ	PAGZZ				4730-00-203-3167	COUPLING, PIPE: 1/2 IN. NPT 56, TYPE 1 WW-P-521 81349	B	EA	1
3	10	PAOZZ	PAOZZ	XBGZZ				4730-00-253-0631	ADAPTER: ENGINE OIL DRAIN 13211E6741 97403	B	EA	1
3	11	PAOZZ	PAOZZ	PAGZZ				5330-00-021-3340	GASKET, OIL DRAIN 102P532 44940	B	EA	1
3	12	PAOZZ	AFOZZ	PAGZZ				4720-00-913-6422	HOSE ASSEMBLY, RUBBER: ENGINE OIL DRAIN 13211E4918 97403	B	EA	1
3	13	PAOZZ	PAOZZ	PAGZZ				4730-00-993-3596	ADAPTER: OIL DRAIN HOSE 13211E4914 97403	B	EA	1
3	14	PAOZZ	PAOZZ	PAOZZ					CAP, PLUG, PROTECTIVE, PLASTIC: OIL DRAIN HOSE 204NF 81904	B	EA	1
									GROUP 02 — FUEL SYSTEM			
4	1	PAOZZ	PAOZZ	PAOZZ				5340-00-914-7303	STRAP, WEBBING: FUEL CAN HOLDDOWN 13212E3613 97403	A	EA	1
4	2	PAOZZ	PAOZZ	PAOZZ				7240-00-222-3088	CAN, GASOLINE: FUEL TANK MILC12838 81349	A	EA	1
4	3	XBOZZ	XBOZZ	PAOZZ				7240-00-025-3377	CLOSURE ASSEMBLY: FUEL CAN 3-3-47 81337	A	EA	1
4	4	XBOZZ	XBOZZ	PAOZZ				5330-00-298-7165	GASKET: CLOSURE ASSEMBLY MILG432 TYPE 3 81349	A	EA	1
4	5	PAOZZ	PAOZZ	PAOZZ				5315-00-010-3385	PIN, COTTER: CLOSURE ASSEMBLY MTG NPN 19099	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
4	6	PAOZZ	PAOZZ	PAOZZ				5310-00-483-8790	NUT, SELF-LOCKING, HEXAGON: CAN BRACKET MTG MS17829-6C 96906	A	EA	2
4	7	PAOZZ	PAOZZ	PAOZZ				5305-00-269-3211	SCREW, CAP, HEXAGON HEAD: CAN BRACKET MTG MS90725-60 96906	A	EA	2
4	8	XBOZZ	XBOZZ	XBOZZ					BRACKET: FUEL CAN MTG 13211E4921 97403	A	EA	1
4	9	PAOZZ	PAOZZ	PAGZZ				5340-00-854-6730	CLAMP, LOOP: FUEL HOSE MS21333-124 96906	A	EA	1
4	10	MFOFZ	AFOFF	AFOFF					HOSE ASSEMBLY: AUXILIARY FUEL, 25 FT 69-668 30554		EA	1
									MANUFACTURE FROM:			
4	11	PAFZZ	PAFZZ	PAFZZ				4030-00-801-5342	HOOK, S NAS1090-1 80205		EA	1
4	12	PAFZZ	PAFZZ	PAFZZ				4730-00-800-9869	UNION MS24392-5 96906		EA	1
4	13	PAFZZ	PAFZZ	PAFZZ				4010-00-267-9618	CHAIN NAS1455-00-8C 80205		FT	V
4	14	PAFZZ	PAFZZ	PAFZZ				4720-00-289-9197	HOSE, RUBBER MILH8794-5 81349		FT	V
4	15	PAFZZ	PAFZZ	PAFZZ				4730-00-842-2201	ADAPTER, STRAIGHT MS24587-5 96906		EA	2
4	16	MFOFZ	AFOFF	AFOFF					HOSE ASSEMBLY: FUEL TANK 13211E4925 97403	A	EA	1
									MANUFACTURE FROM:			
4	17	XAOZZ	PAFZZ	PAGZZ				4730-00-497-4281	ADAPTER, STRAIGHT MS24587-5 96906	A	EA	2
4	18	XAOZZ	PAFZZ	PAGZZ				4720-00-289-9197	HOSE, RUBBER MILH8794-5 81349	A	FT	V
5	1	PAOZZ	PAOZZ	PAOZZ				5340-00-914-7303	STRAP ASSEMBLY, TIE DOWN: GAS CAN 13212E3613 97403	B	EA	1
5	2	PAOZZ	PAOZZ	PAOZZ				7240-00-025-3377	CAN, GAS: 5 GALLON MILC12838 (SEE FIGURE 4 FOR BREAKDOWN) 81349		EA	1
5	3	PAOZZ	PAOZZ	PAOZZ				5310-00-880-7744	NUT, HEXAGON, MACHINE: BRACKET MTG MS51967-5 96906	B	EA	3
5	4	PAOZZ	PAOZZ	PAOZZ				5310-00-407-9566	WASHER, LOCK: BRACKET MTG MS35338-45 96906	B	EA	3
5	5	PAOZZ	PAOZZ	PAOZZ				5306-00-018-0078	BOLT, MACHINE: BRACKET MTG MS35297-33 96906	B	EA	3
5	6	XBOZZ	XBOZZ	XBOZZ					BRACKET, GAS CAN: INNER 13216E1926 97403	B	EA	1
5	7	XBOZZ	XBOZZ	XBOZZ					BRACKET, GAS CAN STRAP, FRONT 13216E1906 97403	B	EA	1
5	8	MFOZZ	AFOFF	PAGZZ				4720-00-015-2539	LINE, FUEL: 3 FT. 10 IN. LG MS28741-5-0440 96906	B	EA	1
									MANUFACTURE FROM:			
5	9	PAOZZ	PAOZZ	PAOZZ				4730-00-842-2201	ADAPTER, STRAIGHT MS24587-5 96906	B	EA	2
5	10	PAOZZ	PAOZZ	PAOZZ				4720-00-289-9197	HOSE, RUBBER MILH8794-5 81349	B	FT	V
5	11	PAOZZ	PAOZZ	PAOZZ				5310-00-012-0614	NUT, HEXAGON, MACHINE: CLIP MTG MS35650-102 96906	B	EA	3
5	12	PAOZZ	PAOZZ	PAOZZ				5310-00-045-3296	WASHER, LOCK: CLIP MTG MS35338-43 96906	B	EA	3

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
5	13	PAOZZ	PAOZZ	PAOZZ				5305-00-993-1848	SCREW, MACHINE: CLIP MTG MS35207-265 96906	B	EA	3
5	14	PAOZZ	PAOZZ	PAOZZ				5340-00-016-2365	CLIP, PIPE 13211E6720 97403	B	EA	1
5	15	PAOZZ	PAOZZ	PAOZZ				5310-00-013-4530	NUT, HEXAGON, MACHINE: ADAPTER HOLDER MTG MS35649-62 96906	B	EA	2
5	16	PAOZZ	PAOZZ	PAOZZ				5310-00-045-4007	WASHER, LOCK, SPRING: HOLDER MTG MS35338-41 96906	B	EA	2
5	17	PAOZZ	PAOZZ	PAOZZ				5305-00-984-4993	SCREW, MACHINE: HOLDER MTG MS35206-223 96906	B	EA	2
5	18	PAOZZ	PAOZZ	PAOZZ				5340-00-016-2362	HOLDER, FUEL ADAPTER 13211E4889-1 97403	B	EA	1
6	1	PAOZZ	PAOOO	PAGZZ				2910-00-066-1235	ADAPTER ASSEMBLY, FUEL CAN 13211E7541 97403		EA	2
6	2	XAOZZ	XAOZZ	XAOZZ					PIPE, EXTENSION: ADAPTER ASSEMBLY 13211E7542 97403		EA	2
6	3	PAOZZ	PAOZZ	PAGZZ				4730-00-277-5115	ADAPTER, STRAIGHT, PIPE: ADAPTER ASSEMBLY TO OUTLET HOSE AN816-5-4 88044		EA	1
6	4	XAOZZ	XAOZZ	XAOZZ					SCREW, SHOULDERED: CLAMP MTG 13211E7545 97403		EA	4
6	5	PAOZZ	PAOZZ	PAGZZ				5310-00-209-1239	WASHER, LOCK: CLAMP TO HEAD MS35335-60 96906		EA	4
6	6	XAOZZ	XAOZZ	XAOZZ					CLAMP, STRAINER: ADAPTER ASSEMBLY LOCKING 13200E6363 97403		EA	2
6	7	XAOZZ	PAOZZ	XAOZZ					WASHER, FLAT: ADAPTER ASSEMBLY 13211E6361 97403	A	EA	2
6	7	PAOZZ	PAOZZ	PAGZZ				5310-00-571-5090	WASHER, STEEL 13200E6361 97403	B	EA	1
6	8	XAOZZ	PAOZZ	PAGZZ				5310-00-409-2561	WASHER, NONMETALLIC: ADAPTER ASSEMBLY 13211E7547 97403		EA	2
6	9	XAOZZ	XAOZZ	XAOZZ					RING, SEALING: ADAPTER ASSEMBLY 13211E7546 97403		EA	2
6	10	XAOZZ	XAOZZ	XAOZZ					WASHER, FLAT: ADAPTER ASSEMBLY 13211E7544 97403		EA	2
6	11	XAOZZ	XAOZZ	XAOZZ					PIPE: ADAPTER ASSEMBLY 13211E7543 97403		EA	2
6	12	XAOZZ	XAOZZ	XAOZZ					HEAD, ADAPTER ASSEMBLY 13211E7548 97403		EA	2
7	1	XBOZZ	XBOZZ	XBOZZ					CAP, PROTECTIVE: FUEL LINE 13211E4936 97403	A	EA	1
7	2	PAOZZ	AFOZZ	PAOZZ				4710-00-923-0405	TUBE ASSEMBLY, FUEL: FILTER TO AUXILIARY VALVE 13211E4878 97403	A	EA	1
7	3	XAOZZ	PAFZZ	PAGZZ				4730-00-639-9869	NUT, TUBE COUPLING AN817-5 88044	A	EA	2
7	4	XAOZZ	PAFZZ	XAGZZ					TUBE, STEEL 13211E4878-1 97403	A	EA	1
7	5	XBOZZ	XBOZZ	XBOZZ				5340-01-071-3831	CAP, PIPE: FUEL LINE 13211E4930 97403	A	EA	1
7	6	PAOZZ	AFOZZ	PAGZZ				4710-00-056-3692	TUBE ASSEMBLY, FUEL: FILTER TO VALVE 13211E4876 97403	A	EA	1
7	7	XAOZZ	PAFZZ	PAGZZ				4730-00-639-9869	NUT, TUBE COUPLING AN817-5 88044	A	EA	2
7	8	XAOZZ	PAFZZ	XAGZZ					TUBE, STEEL 13211E4876-1 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
7	9	XBOZZ	XBOZZ	XBOZZ					COUPLING ASSEMBLY: FUEL HOSE 13211E4792 97403	A	EA	1
7	10	PAOZZ	AFFFF	PAOZZ				4720-00-056-3893	HOSE ASSEMBLY, FUEL: CAN TO VALVE 13211E4924 97403	A	EA	1
7	11	XAOZZ	PAFZZ	XAOZZ					ADAPTER, STRAIGHT 13211E4924-2 97403	A	EA	1
7	12	XAOZZ	PAFZZ	XAOZZ					ADAPTER, STRAIGHT 13211E4924-3 97403	A	EA	1
7	13	XAOZZ	PAFZZ	PAGZZ				4720-00-289-9197	HOSE, RUBBER MILH8794-5 96906	A	IN	21
7	14	XBOZZ	XBOZZ	XBOZZ					ADAPTER, COUPLING: FUEL VALVE 13211E4814 97403	A	EA	1
7	15	XBOZZ	XBOZZ	XBOZZ					ELBOW, PIPE: VALVE TO ADAPTER 13211E4928 97403	A	EA	1
7	16	PAOZZ	PAOZZ	PAOZZ				4730-00-277-5135	TEE, TUBE: FILTER TO TUBE MS20825-5 96906	A	EA	1
7	17	PAOZZ	PAOZZ	PAOZZ					ELBOW, PIPE TO TUBE: FUEL LINE 13218E8062-2 97403	A	EA	5
7	18	PAOZZ	PAOZZ	PAOZZ				5305-00-984-4988	SCREW, MACHINE: FUEL VALVE MTG MS35206-228 96906	A	EA	4
7	19	PAOZZ	PAOZZ	PAOZZ				5310-00-579-0079	WASHER, LOCK: FUEL VALVE MTG MS35333-37 96906	A	EA	4
7	20	PAOZZ	PAOZZ	PAOZZ					VALVE ASSEMBLY, PLUG: FUEL ON-OFF 13211E4927 97403	A	EA	1
7	21	PAOZZ	PAOZZ	PAOZZ				5305-00-984-4988	SCREW, MACHINE: FUEL ON-OFF VALVE MTG MS35206-228 96906	A	EA	4
7	22	PAOZZ	PAOZZ	PAOZZ				5310-00-579-0079	WASHER, LOCK: FUEL ON-OFF VALVE MTG MS35333-37 96906	A	EA	4
7	23	PAOZZ	PAOZZ	PAOZZ				4820-00-729-6132	VALVE ASSEMBLY, PLUG: AUXILIARY FUEL SUPPLY 310-3-1-8B 86768	A	EA	1
7	24	PAOZZ	PAOZZ	PAOZZ				5310-00-483-8792	NUT, SELF-LOCKING, HEXAGON: VALVE BRACKET MTG MS17829-4C 96906	A	EA	2
7	25	PAOZZ	PAOZZ	PAOZZ				5310-00-285-8124	WASHER, FLAT: FUEL VALVE BRACKET MTG ZW1-16-20-32 43999	A	EA	2
7	26	PAOZZ	PAOZZ	PAOZZ					SCREW, CAP, HEXAGON HEAD: VALVE BRACKET MTG MS35291-6 96906	A	EA	2
7	27	XBOZZ	XBOZZ	XBOZZ					BRACKET, ANGLE: VALVE AND FILTER MTG 13211E4887 97403	A	EA	1
7	28	PAOZZ	PAOZZ	PAOZZ					NUT, PLAIN, HEXAGON: FUEL FILTER MTG MS35649-102 96906	A	EA	6
7	29	PAOZZ	PAOZZ	PAOZZ				5310-00-045-3296	WASHER, LOCK: FUEL FILTER MTG MS35338-43 96906	A	EA	2
7	30	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8546	WASHER, FLAT: FUEL FILTER MTG MS27183-8 96906	A	EA	2
7	31	PAOZZ	PAOZZ	PAOZZ				5306-00-225-8497	SCREW, MACHINE: FUEL FILTER MTG MS90725-32 96906	A	EA	2
7	32	PAOZZ	PAOZZ	PAOZZ				4330-00-025-3493	FILTER, FLUID PRESSURE: FUEL MS51085 96906	A	EA	1
8	1	XBOZZ	XBOZZ	XBOZZ				9505-00-603-4120	WIRE, LOCK, .041 NOM WIRE DIA, CRES MS20995C41 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	FT	V
8	2	PAOZZ	PAOZZ	PAOZZ				2910-00-905-9792	STRAINER, SEDIMENT: AUTOMOTIVE FUEL (10 GPH) MS51086-1 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
9	1	MFOFZ	AFOFF	AFOZZ					HOSE, FUEL AUXILIARY: FUEL DRUM TO CAN 69-668 (SEE FIGURE 4-10 30554 FOR BREAKDOWN)		EA	1
9	2	MFOFZ	AFOFF	AFOZZ					LINE, FUEL: 36 IN. LG MS28741-5-0360 96906	B	EA	1
									MANUFACTURE FROM:			
		PAOZZ	PAOZZ	PAOZZ				4730-00-842-2201	ADAPTER, STRAIGHT MS24587-5 96906	B	EA	2
		PAOZZ	PAOZZ	PAOZZ				4720-00-289-9197	HOSE, RUBBER MILH8794-5 81349	B	FT	V
9	3	PAOZZ	PAOZZ	PAOZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: VALVE MTG MS51967-2 96906	B	EA	2
9	4	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK: VALVE MTG MS35338-44 96906	B	EA	2
9	5	PAOZZ	PAOZZ	PAOZZ				5305-00-068-0502	SCREW, CAP: VALVE MTG MS90725-6 96906	B	EA	2
9	6	XBOZZ	AOOOO	XBOZZ					VALVE AND FILTER 13216E1928 97403	B	EA	1
9	7	PBOZZ	XBOZZ	XBOZZ					BRACKET, VALVE 13216E1927 97403	B	EA	1
9	8	PAOZZ	AOOOO	PAOZZ				4730-00-950-8827	CAP ASSEMBLY, CAPTIVE 13211E6751 97403	B	EA	1
9	9	PAOZZ	PAOZZ	PAOZZ				5305-00-253-5621	SCREW, DRIVE: CAP RETAINING MS21318-30 96906	B	EA	1
9	10	PAOZZ	PAOZZ	PAOZZ					CHAIN, SAFETY: CAP RETAINING MS17311-1 96906	B	EA	1
9	11	PAOZZ	PAOZZ	PAOZZ				5940-00-655-3318	TERMINAL, CRIMP: CAP RETAINING MS20659-41 96906	B	EA	1
9	12	XAOZZ	PAOZZ	PAOZZ				4730-00-950-8831	CAP, FUEL VALVE: FUEL DRAIN 13211E6752 97403	B	EA	1
9	13	PAOZZ	PAOZZ	PAOZZ				4730-00-194-1125	ADAPTER, STRAIGHT: FILTER TO LINE AN816-5B 88044	B	EA	1
9	14	PAOZZ	PAOZZ	PAOZZ				4730-00-278-4681	ELBOW, MALE MS20822-5-4B 96906	B	EA	2
9	15	PAOZZ	PAOZZ	PAOZZ				4730-00-640-6330	NIPPLE: VALVE TO FILTER 13211E6755 97403	B	EA	1
9	16	PAOZZ	PAOZZ	PAOZZ				4820-00-930-6624	VALVE, FUEL 13211E6750 97403	B	EA	1
9A		PAOZZ	PAOZZ	PAOZZ					FUEL LINE ASSEMBLY: FUEL FILTER 13214E7670 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	1	PAOZZ	PAOZZ	PAOZZ					COUPLING ASSEMBLY: TO FUEL SUPPLY B13211E4792 97403	SERIAL NUMBER RANGE MS68-0001 THRU MA68-2987	EA	1
9A	2	PAOZZ	PAOZZ	PAOZZ					HOSE ASSEMBLY: FUEL SUPPLY TO THREE WAY VALVE C13211E4924 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	3	PAOZZ	PAOZZ	PAOZZ					HOSE ASSEMBLY: ENGINE TO FUEL FILTER C13211E4925 97403	SERIAL NUMBER RANGE MS68-0001 THRU MA68-2987	EA	1
9A	4	PAOZZ	PAOZZ	PAOZZ					ELBOW,TUBE, MALE PIPE END-FLARED TYPE, AUTOMOTIVE, 5/16 TUBE OD X 1/8 NPTF X 1/2 — 20 UNF—2A BRS MS39162-4 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	5	PAOZZ	PAOZZ	PAOZZ					CAP ASSEMBLY, CAPTIVE B13211E6751 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	6	PAOZZ	PAOZZ	PAOZZ					ELBOW, TUBE C13218E8062-1 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
9A	7	XBOZZ	XBOZZ	XBOZZ				9505-00-603-4120	WIRE, LOCK, .041 NOM WIRE DIA, CRES MS20995C41 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	FT	V
9A	8	PAOZZ	PAOZZ	PAOZZ				2910-00-905-9792	STRAINER, SEDIMENT: AUTOMOTIVE FUEL (10 GPH) MS51086-1 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	9	PAOZZ	PAOZZ	PAOZZ					PLUG, SQUARE HEAD, PIPE THREAD 1/8 NPT CRES TY 304 MS20913-1J 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	10	PAOZZ	PAOZZ	PAOZZ					ADAPTER, INTL FLARE C13218E0290-2 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	11	PAOZZ	PAOZZ	PAOZZ					ELBOW, TUBE C13218E8062-2 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	12	PAOZZ	PAOZZ	PAOZZ					ELBOW, TUBE C13218E8062-1 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	13	PAOZZ	PAOZZ	PAOZZ				5310-00-997-1888	NUT, PLAIN, HEXAGON, MACHINE SCREW, UNC-2A 1/4-20 CS, CD, PLD: 3-WAY VALVE MTG MS35649-2252 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	2
9A	14	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES (IN./MM) 1/4 NOM SIZE CS, CD, PLD: 3-WAY VALVE MTG MS35338-44 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	2
9A	15	PAOZZ	PAOZZ	PAOZZ				5305-00-225-3839	SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT) STEEL, GRADE 5, CAD PLD, UNC-2A, 1/4-20 X 1.000 L: 3-WAY VALVE MTG MS90725-8 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	2
9A	16	PAOZZ	PAOZZ	PAOZZ					VALVE, 3-WAY C13211E6750 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	17	PAOZZ	PAOZZ	PAOZZ				5310-00-809-4058	WASHER, FLAT-ROUND, STEEL, CAD, PLD, GENERAL PURPOSE (IN./MM) .281 ID X .625 OD X .065 THK MS27183-10 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	2
9A	18	PAOZZ	PAOZZ	PAOZZ				5305-00-253-5614	SCREW, DRIVE, ROUND HEAD, TYPE U, STEEL CARBON, CAD PLD, NO 4.7 X 3/16 L: NAMEPLATE TO BRACKET MTG MS21318-20 96906	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	4
9A	19	XBOZZ	XBOZZ	XBOZZ					NAMEPLATE, FUEL VALVE C13214E7665 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
9A	20	XBOZZ	XBOZZ	XBOZZ					BRACKET, VALVE C13214E7666 97403	SERIAL NUMBER RANGE MA68-0001 THRU MA68-2987	EA	1
									GROUP 03 — BATTERIES AND CABLES			
10	1	MFOFZ	AFOZZ	PAGZZ				6140-00-923-4476	LEAD, STORAGE BATTERY, NEGATIVE 13213E3930 97403	A	EA	1
									MANUFACTURE FROM:			
		PAFFZ	PAFZZ	XBGZZ				5940-00-401-9856	TERMINAL, LUG MS25036-127 96906	A	EA	1
		PAFFZ	PAFZZ	XBGZZ					TERMINAL, BATTERY: NEGATIVE 13216E3336 97403	A	EA	1
		PAFFZ	PAFZZ	XBGZZ					WIRE, ELECTRICAL M13486-1-12, TYPE I, 2 AWG 81349	A	FT	V
10	2	MFOFZ	AFOZZ	PAGZZ				6140-00-945-9032	LEAD, STORAGE BATTERY, POSITIVE 13213E3929 97403	A	EA	1
									MANUFACTURE FROM:			
		PAFFZ	PAFZZ	XBGZZ				5940-00-401-9856	TERMINAL, LUG MS25036-127 96906	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
		PAFFZ	PAFZZ	XBGZZ					TERMINAL, BATTERY, POSITIVE 13216E3335 97403	A	EA	1
		PAFFZ	PAFZZ	XBGZZ				6145-00-805-3354	WIRE, ELECTRICAL M13486-1-12, TYPE I, 2 AWG 81349	A	FT	V
10	3	PAOZZ	PAOZZ	PAOZZ				5310-00-828-8189	NUT, PLAIN, WING: BATTERY HOLDDOWN MS35425-41 96906	A	EA	3
10	4	XBOZZ	XBOZZ	PAOZZ					BOLT, HOOK: BATTERY FRAME HOLDING 13211E4886 97403	A	EA	3
10	5	PAOZZ	PAOBZ	PAHZZ				6140-00-059-3528	BATTERY, STORAGE 24 V MS75047-1 96906		EA	1
10	6	PAOZZ	PAOZZ	PAOZZ					NUT, PLAIN, HEXAGON: HOOK BOLT STORAGE MS35690-502 96906	A	EA	1
10	7	PAOZZ	PAOZZ	PAOZZ				5310-00-167-0721	WASHER, LOCK: HOOK BOLT STORAGE MS35333-41 96906	A	EA	1
10	8	PAOZZ	PAOZZ	PAOZZ				5310-00-245-3424	NUT, SELF-LOCKING, HEXAGON: BATTERY FRAME MS17829-5C 96906	A	EA	1
10	9	PAOZZ	PAOZZ	PAOZZ					BOLT, MACHINE: BATTERY FRAME MS35291-32 96906	A	EA	1
10	10	XBOZZ	XBOBZ	XBGZZ					FRAME, BATTERY HOLDER 13211E4892 97403	A	EA	1
10	11	XBOZZ	XBOBZ	XBGZZ					FRAME: BATTERY HOLDDOWN 13211E4893 97403	A	EA	1
10	12	PAOZZ	PAOZZ	PAOZZ				4710-00-941-1491	DRAIN, BATTERY BOX 13211E4911 97403	A	EA	1
		PAOZZ	PAOZZ	PAOZZ					SULFURIC ACID, ELECTROLYTE: BATTERY MS36053-7 96906		GL	V
10	13	PAOZZ						5940-00-738-6272	COVER, BATTERY TERMINAL 10942521 19207		EA	2
11	1	PAOZZ	PAOZZ	PAOZZ				5305-00-993-1848	SCREW, PHILLIPS HEAD: CLAMP MTG MS35207-265 96906	B	EA	2
11	2	PAOZZ	PAOZZ	PAOZZ				5310-00-045-3206	WASHER, LOCK: CLAMP MTG MS35338-43 96906	B	EA	2
11	3	XBOZZ	PAOZZ	PAOZZ				5340-00-088-6655	CLAMP, LOOP, STEEL, CUSHIONED: CABLE MTG MS21333-101 96906	B	EA	2
11	3	XBOZZ	PAOZZ	PAOZZ					CLAMP, CABLE 13211E6996 97403	B	EA	1
11	4	MFOFZ	AFOZZ	PAGZZ				6140-00-923-4472	LEAD, STORAGE BATTERY 13213E3928 97403	B	EA	1
									MANUFACTURE FROM:			
		PAFFZ	PAOZZ	XBGZZ					TERMINAL, BATTERY: NEGATIVE 13216E3336 97403	B	EA	1
		PAFFZ	PAOZZ	XBGZZ					TERMINAL, BATTERY: POSITIVE 13216E3335 97403	B	EA	1
		PAFFZ	PAOZZ	XBGZZ				6145-00-805-3354	WIRE, ELECTRICAL M13486-1-12, TYPE I, 2 AWG 81349	B	FT	V
11	5	PAOZZ	PAOZZ	PAOZZ				5310-00-880-7744	NUT, HEXAGON, MACHINE: CABLE MTG MS51967-5 96906	B	EA	2
11	6	PAOZZ	PAOZZ	PAOZZ				5310-00-167-0721	WASHER, LOCK: CABLE MTG MS35333-41 96906	B	EA	2
11	7	PAOZZ	PAOZZ	PAOZZ				5306-00-225-8502	SCREW, CAP, HEXAGON HEAD: CABLE MTG MS90725-38 96906	B	EA	1
11	8	PAOZZ	PAOZZ	PAOZZ				5310-00-087-7493	WASHER, FLAT: CABLE MTG MS27183-13 96906	B	EA	2
11	9	PAOZZ	PAOZZ	PAOZZ				5330-00-021-3339	WASHER, INSULATING: CABLE MTG 13211E6713 97403	B	EA	2

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
11	10	XBOZZ	XBOZZ	XBOZZ					TUBE, INSULATING: BATTERY CABLE BOLT 13211E6712 97403	B	EA	1
11	11	MFOFZ	AFOZZ	PAGZZ				6150-00-021-3332	CABLE ASSEMBLY, STARTER 13216E1925 97403	B	EA	1
									MANUFACTURE FROM:			
11	12	PAFFZ	PAOZZ	PAGZZ				5940-00-401-9856	TERMINAL, INSULATING 13211E6706 00779	B	EA	2
11	13	PAFFZ	PAOZZ	PAGZZ					SHIELDING, CABLE 13211E6994 97403	B	EA	1
11	14	PAFFZ	PAOZZ	PAGZZ				6145-00-538-8219	WIRE, ELECTRICAL M13486-1-12, TYPE I, 4 AWG 81349	B	FT	V
11	15	MFOFZ	AFOZZ	PAGZZ				2920-00-021-3334	CABLE ASSEMBLY: BATTERY, POSITIVE 13213E3929 97403	B	EA	1
									MANUFACTURE FROM:			
11	16	PAFFZ	PAFZZ	XBGZZ				5940-00-401-9856	TERMINAL, LUG MS25036-127 96906	B	EA	1
11	17	PAFFZ	PAFZZ	XBGZZ					TERMINAL, BATTERY: POSITIVE 13216E3335 97403	B	EA	1
11	18	PAFFZ	PAFZZ	PAGZZ				6145-00-805-3354	WIRE, ELECTRICAL 1 EA M13486-1-12, TYPE I, 2 AWG 81349	B	IN	FT
11	19	MFOFZ	AFOZZ	PAGZZ				2920-00-021-3337	CABLE ASSEMBLY: BATTERY, NEGATIVE 13213E3930 97403	B	EA	1
									MANUFACTURE FROM:			
11	20	PAFFZ	PAFZZ	XBGZZ				5940-00-401-9856	TERMINAL, LUG MS25036-127 96906	B	EA	1
11	21	PAFFZ	PAFZZ	XBGZZ				5940-00-557-4338	TERMINAL, BATTERY: NEGATIVE 13216E3336 97403	B	EA	1
11	22	PAFFZ	PAFZZ	PAGZZ				6145-00-805-3354	WIRE, ELECTRICAL, 1 EA M13486-1-12, TYPE I, 2 AWG 81349	B	FT	V
11	23	PAOZZ	PAOZZ	PAOZZ				5310-00-880-7744	NUT, HEXAGON, MACHINE: BATTERY MTG MS51967-5 96906	B	EA	4
11	24	PAOZZ	PAOZZ	PAOZZ				5310-00-802-4701	WASHER, FLAT: BATTERY HOOK BOLT MTG MS15795-813 96906	B	EA	4
11	25	XBOZZ	XBOZZ	PAOZZ					BOLT, HOOK: BATTERY MTG 13211E6763 97403	B	EA	4
11	26	XBOZZ	XBOBZ	XBGZZ					FRAME, BATTERY, TOP 13216E1912 97403	B	EA	1
11	27	XBOZZ	XBOBZ	XBGZZ					FRAME, BATTERY, TOP 13216E1922 97403	B	EA	1
11	28	PAOZZ	PAOBZ	PAHZZ				6140-00-059-3528	BATTERY, STORAGE 24V MS75047-1 96906		EA	1
11	29	XBOZZ	XBOZZ	XBGZZ					TRAY, BATTERY 13216E1913 97403	B	EA	1
11	30	PAOZZ	PAOZZ	PAOZZ				5310-00-880-7744	NUT, HEXAGON, MACHINE: BATTERY FRAME MTG MS51967-5 96906	B	EA	6
11	31	PAOZZ	PAOZZ	PAOZZ				5310-00-407-9566	WASHER, LOCK: BATTERY FRAME TO SKID MTG MS35338-45 96906	B	EA	6
11	32	PAOZZ	PAOZZ	PAOZZ				5306-00-018-0078	BOLT, HEXAGON HEAD: BATTERY FRAME MTG MS35297-33 96906	B	EA	6
11	33	XBOZZ	XBOZZ	XBGZZ					FRAME, BATTERY BOTTOM 13216E1911 97403	B	EA	1
		XBOZZ	XBOZZ	XBOZZ					PLUG, TAPERED, PLASTIC 205 81904	B	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
									GROUP 04 — ELECTRICAL PANELS AND CONTROLS			
12	1	PAOZZ	AFOZZ	PBGGG				6115-00-056-4598	CABLE ASSEMBLY, ELECTRICAL: ENGINE 13211E4899 97403	A	EA	1
12	2	XAOZZ	PAOZZ	PAGZZ					CONNECTOR, PLUG, ELECTRICAL MS3108E18-1P 96906	A	EA	1
12	3	XAOZZ	PAOZZ	PAGZZ					CONNECTOR, PLUG, ELECTRICAL MS3106F20-7S 96906	A	EA	1
12	4	XAOZZ	PAOZZ	PAGZZ					INSULATION SLEEVING MILI3190 81349	A	EA	1
12	5	XAOZZ	PAOZZ	PAGZZ				6145-00-578-6602	WIRE, ELECTRICAL MILW5086 81349	A	EA	1
12	6	PBOZZ	AFOZZ	PAGZZ				6115-00-065-5262	CABLE ASSEMBLY, POWER: GENERATOR TO CONTROL BOX 13211E4913 97403	A	EA	1
12	7	PAOZZ	PAOZZ	PAGZZ					BOLT, MACHINE: CONTROL BOX MTG MS35291-31 96906	A	EA	4
12	8	PAOZZ	PAOZZ	PAGZZ				5310-00-167-0721	WASHER, LOCK: CONTROL BOX MTG MS35333-41 96096	A	EA	4
12	9	XBOZZ	AFFFF	AGGGD					CONTROL BOX ASSEMBLY 13211E4861 97403	A	EA	1
13	1	PAOZZ	PAOZZ	PAGZZ				5305-00-989-7434	SCREW, MACHINE: PANEL BRACE MTG MS35207-263 96906	A	EA	1
13	2	PAOZZ	PAOZZ	PAGZZ				5310-00-809-8546	WASHER, FLAT: PANEL BRACE MTG MS27183-8 96906	A	EA	1
13	3	PAOZZ	PAOZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: BRACE MTG MS20364-832 96906	A	EA	2
13	4	PAOZZ	PAOZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: PANEL BRACE MTG MS27183-7 96906	A	EA	4
13	5	PAOZZ	PAOZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: PANEL BRACE MTG MS35206-245 96906	A	EA	2
13	6	XBOZZ	XBOZZ	XBGZZ					BRACE, PANEL 13211E4848 97403	A	EA	1
13	7	PAFZZ	PAOZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: CONTROL PANEL MTG MS20364-832 96906	A	EA	3
13	8	PAFZZ	PAOZZ	PAGZZ				5310-00-809-8546	WASHER, FLAT: CONTROL PANEL MTG MS27183-8 96906	A	EA	3
13	9	PAFZZ	PAOZZ	PAGZZ				5305-00-989-7434	SCREW, MACHINE: CONTROL PANEL MTG MS35207-263 96906	A	EA	3
13	10	XBOZZ	XBOZZ	XBGZZ				5325-00-290-2906	STUD, TURNLOCK FASTENER: CONTROL PANEL CLOSING 13211E4842 97403	A	EA	5
13	11	XBOZZ	XBOZZ	XBGZZ					SPRING, RETAINING: FASTENER, CONTROL PANEL 13211E4843 97403	A	EA	5
13	12	PAOZZ	PAOZZ	PAGZZ					NUT, PLAIN, HEXAGON: LEAD MTG MS35691-811 96906	A	EA	4
13	13	PAOZZ	PAOZZ	PAGZZ				5310-00-577-5354	WASHER, LOCK: LEAD MTG MS35338-105 96906	A	EA	4
13	14	PAOZZ	PAOZZ	PAGZZ					WASHER, FLAT: LEAD MTG MS15795-618 96906	A	EA	8
13	15	MFOFZ	AFFZZ	XBGZZ					LEAD, ELECTRICAL: SWITCH AND TERMINAL BOARD 13211E4858-4 97403 MANUFACTURE FROM:	A	EA	2
		PAFZZ	PAFZZ	XBGZZ				5940-00-143-5284	TERMINAL, LUG MS25036-115 96906	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
		PAFZZ	PAFZZ	XBGZZ					TERMINAL, LUG 13211E4364-7 97403	A	EA	1
		PAFZZ	PAFZZ	PAGZZ				6145-00-284-0657	WIRE, ELECTRICAL M5086-2-8-9 81349	A	FT	V
13	16	MFOFZ	AFFZZ	XBGZZ					LEAD, ELECTRICAL: VOLTAGE SELECTOR 13211E4858-1 97403	A	EA	2
									MANUFACTURE FROM:			
		PAFZZ	PAFZZ	XBGZZ				5940-00-804-0515	TERMINAL, LUG MS25036-128 96906	A	EA	1
		PAFZZ	PAFZZ	XBGZZ				5940-00-557-4339	TERMINAL, LUG MS25036-126 96906	A	EA	1
		PAFZZ	PAFZZ	XBGZZ				6145-00-578-6606	WIRE, ELECTRICAL M5086-2-2-9 81349	A	FT	V
13	17	PAFZZ	AFFBZ	PAGZZ				6115-00-949-0400	WIRING HARNESS, BRANCHED: CONTROL PANEL 13211E4830 97403	A	EA	1
13	18	PAOZZ	PAOZZ	XBOZZ					RIVET, SOLID: WIRING DIAGRAM MTG MS20470D4-6 96906	A	EA	4
13	19	XBOZZ	MDOZZ	XBOZZ					PLATE, DESIGNATION: WIRING DIAGRAM 13213E3934 97403	A	EA	1
13	20	PAOZZ	PAFFF	PAGZZ				6115-00-016-2360	ASSEMBLY COMPONENT: PRINTED CIRCUIT 13211E4849 97403	A	EA	1
13	21	XAOZZ	PAFZZ	XBGZZ					RESISTOR, FIXED 13211E4849-4 97403	A	EA	1
13	22	XAOZZ	PAFZZ	XBGZZ					RESISTOR, FIXED, FILM 13211E4849-2 97403	A	EA	1
13	23	XAOZZ	PAFZZ	XBGZZ					RESISTOR, FIXED, FILM 13211E4849-5 97403	A	EA	1
13	24	XAOZZ	PAFZZ	XBGZZ					RESISTOR FIXED 13211E4849-3 97403	A	EA	1
13	25	XAOZZ	PAFZZ	XBGZZ					TERMINAL, STUD MS17122-7 96906	A	EA	4
13	26	XAOZZ	XAOZZ	XBGZZ					BOARD, PRINTED CIRCUIT 13211E4850 97403	A	EA	1
13	27	PAOZZ	PAOZZ	PBHZZ					METER, TIME TOTALIZING 73-0507 30554		EA	1
13	28	PAOZZ	PAOZZ	PBHZZ				6620-01-017-8765	GAGE, PRESSURE, DIAL 505 AS 57733		EA	1
13	29	PAOZZ	PAOZZ	PBHZZ				6625-00-066-1278	AMMETER, D.C.: BATTERY CHARGING 13211E6918 97403		EA	1
13	30	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1582	SWITCH, TOGGLE: REMOTE LOCAL MS35059-23 96906		EA	1
13	31	PAOZZ	PAOZZ	PAGZZ				5930-00-615-9376	SWITCH, TOGGLE: EMERGENCY STOP-RUN MS35059-21 96906		EA	1
13	32	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1518	SWITCH, TOGGLE: STOP-START, ENGINE MS35058-27 96906		EA	1
13	33	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1514	SWITCH, TOGGLE: PANEL LIGHT MS35058-22 96906		EA	1
13	34	XBOZZ	XBFZZ	XBGZZ					KNOB, CONTROL: ROTARY SWITCH AND RESISTOR MS91528-1K2B 96906		EA	3
13	35	PAFZZ	PAFZZ	PAGZZ				5930-00-259-4646	SWITCH, ROTARY: VOLTAGE SELECTOR 13211E4818 97403	A	EA	1
13	36	PAFZZ	PAFZZ	PAGZZ				5905-00-643-5129	RESISTOR, VARIABLE: VOLTAGE ADJUSTING M22-03-00191FD 81349	A	EA	1
13	37	PAFZZ	PAFZZ	PAGZZ				5930-00-065-5302	SWITCH, ROTARY: CURRENT SELECTOR 13211E4816 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)	(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SSI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
13	38	XBOZZ	XBOZZ	XBGZZ					LIGHT, PANEL 13211E6920 97403	A	EA	2
13	39	PAOZZ	PAOZZ	PAOZZ				6240-00-155-8707	LAMP, INCANDESCENT: PANEL LIGHT MS15571-6 96906	A	EA	2
13	40	PAFZZ	PAOZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: FREQUENCY METER MTG 13211E4855-3 97403	A	EA	3
13	40	PAOZZ	PAOZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: AMMETER AND VOLTMETER MTG 13211E4855-3 97403	A	EA	6
13	41	PAFZZ	PAOZZ	PAGZZ				5310-00-951-4679	WASHER, FLAT: FREQUENCY METER MTG MS27183-3 96906	A	EA	3
13	41	PAOZZ	PAOZZ	PAGZZ				5310-00-951-4679	WASHER, FLAT: AMMETER AND VOLTMETER MTG MS27183-3 96906	A	EA	6
13	42	PAFZZ	PAOZZ	PAGZZ				5305-00-983-6730	SCREW, MACHINE: FREQUENCY METER MTG MS35206-218 96906	A	EA	3
13	42	PAOZZ	PAOZZ	PAGZZ				5305-00-983-6730	SCREW, MACHINE: AMMETER AND VOLTMETER MS35206-218 96906	A	EA	6
13	43	PAOZZ	PAOZZ	PBHZZ				6625-00-065-5301	VOLTMETER, AC: GENERATOR 13211E6905 97403		EA	1
13	44	PAFZZ	PAOZZ	PBHZZ				6625-00-054-2038	METER, FREQUENCY 13211E6992-1 97403	A	EA	1
13	45	PAOZZ	PAOZZ	PBHZZ				6625-00-065-5258	AMMETER 13211E6919 97403		EA	1
13	46	XBFZZ	XBFZZ	XBGZZ					PANEL, CONTROL 13211E4819 97403	A	EA	1
14	1	PAOZZ	PAOZZ	PAOZZ				5305-00-984-6191	SCREW, MACHINE: DRIP COVER MTG MS35206-243 96906	A	EA	2
14	2	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8546	WASHER, FLAT: DRIP COVER MTG MS27183-8 96906	A	EA	2
14	3	XBOZZ	XBOZZ	XBGZZ					COVER, DRIP: LOAD TERMINAL BOARD 13211E4797 97403	A	EA	1
14	4	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: DRIP COVER MTG MS35207-261 96906	A	EA	2
14	5	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8546	WASHER, FLAT: DRIP COVER MTG MS27183-8 96906	A	EA	2
14	6	XBOZZ	XBOZZ	XBOZZ					COVER, DRIP: REMOTE CONTROL TERMINAL BOARD 13211E4785 97403	A	EA	1
14	7	PAOZZ	PAOZZ	PAOZZ				5305-00-984-6191	SCREW, MACHINE: TERMINAL BOARD COVER MTG MS35206-243 96906	A	EA	2
14	8	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8544	WASHER, FLAT: TERMINAL BOARD COVER MTG MS27183-7 96906	A	EA	2
14	9	XBOZZ	XBOZZ	PAOZZ					COVER ASSEMBLY: LOAD TERMINAL BOARD 13211E4776 97403	A	EA	1
14	10	XBOZZ	XBOZZ	XBGZZ					RING, RETAINING: FASTENER 13211E4863 97403	A	EA	1
14	11	XBOZZ	XBOZZ	XBGZZ					STUD, TURNLOCK FASTENER 13211E4845 97403	A	EA	1
14	12	PAOZZ	PAOZZ	XBOZZ				5320-00-117-6862	RIVET, SOLID: COVER WIRING DIAGRAM MTG MS20470D4-4 96906	A	EA	4
14	13	XBOZZ	XBOZZ	XBOZZ					PLATE, DESIGNATION: COVER WIRING DIAGRAM 13211E4810 97403	A	EA	1
14	14	PAOZZ	PAOZZ	PAOZZ					SCREW, MACHINE: CONVENIENCE RECEPTACLE COVER MTG MS35190-28 96906	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
14	15	XBOZZ	PAOZZ	PAOZZ				5975-00-235-4635	COVER, RECEPTACLE 13212E9780 97403	A	EA	1
14	16	PAOZZ	PAOZZ	PAOZZ				5305-00-984-6191	SCREW, MACHINE: CONVENIENCE RECEPTACLE MTG MS35206-243 96906	A	EA	2
14	17	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8544	WASHER, FLAT: CONVENIENCE RECEPTACLE MTG MS27183-7 96906	A	EA	2
14	18	XBOZZ	PAOZZ	PAGZZ				5330-00-085-8553	GASKET: CONVENIENCE RECEPTACLE COVER 13211E6891 97403	A	EA	1
14	19	PAOZZ	PAOZZ	PAGZZ				5935-00-564-1355	CONNECTOR, RECEPTACLE, ELECTRICAL: CONVENIENCE 13211E6892 97403	A	EA	1
14	20	PAOZZ	PAOZZ	PAGZZ				5305-00-253-5614	SCREW, DRIVE: CONVENIENCE RECEPTACLE MS21318-20 96906	A	EA	2
14	21	XBOZZ	MDOZZ	XBOZZ					PLATE, IDENTIFICATION: CONVENIENCE RECEPTACLE 13211E6888-3 97403	A	EA	1
14	22	PAFZZ	PAFZZ	PAGZZ				6115-00-940-0175	CONVERTER, CONTROL FREQUENCY 13211E6901 97403	A	EA	1
14	23	PAOZZ	PAFZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: CLAMP MTG MS20364-832 96906	A	EA	2
14	24	XBOZZ	XBOZZ	XBGZZ					CLAMP, LOOP: WIRING HARNESS MTG MS25281-5 96906	A	EA	2
14	25	PAFZZ	PAOZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: WIRING HARNESS MTG MS35206-245 96906	A	EA	4
14	26	PAFZZ	PAOZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: WIRING HARNESS MTG MS27183-7 96906	A	EA	4
14	27	PAFZZ	PAOZZ	PAGZZ				5305-00-989-7435	SCREW, MACHINE: DOOR MTG MS35207-264 96906	A	EA	5
14	28	PAFZZ	PAOZZ	PAGZZ				5310-00-809-8546	WASHER, FLAT: DOOR MTG MS27183-8 96906	A	EA	5
14	29	XBFZZ	XBFZZ	XBGZZ					DOOR, LOWER: CONTROL BOX 13211E4813 97403	A	EA	1
14	30	XBFZZ	XFFZZ	XBGZZ					GASKET: PANEL, BOTTOM 13211E4846 97403	A	EA	1
14	31	XBFZZ	XBFZZ	XBGZZ					GASKET: PANEL, SIDE 13211E4798 97403	A	EA	2
14	32	XBFZZ	XBFZZ	XBGZZ					GASKET: PANEL, TOP 13211E4799 97403	A	EA	1
14	33	PAFZZ	PAFZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: CONNECTOR MTG MS35206-245 96906	A	EA	4
14	34	PAFZZ	PAFZZ	PAGZZ				5310-00-559-0070	WASHER, LOCK: CONNECTOR MTG MS35333-38 96906	A	EA	4
14	35	XBFZZ	XBFZZ	XBGZZ					CONNECTOR, RECEPTACLE, ELECTRICAL: HARNESS MTG 13211E4857 97403	A	EA	1
14	36	PAOZZ	PAOZZ	PAOZZ				5920-00-646-4631	FUSE, CARTRIDGE F61C500V15A 81349	A	EA	3
14	37	PAOZZ	PAOZZ	PAOZZ				5305-00-989-7435	SCREW, MACHINE: FUSEHOLDER MTG MS35207-264 96906	A	EA	4
14	38	PAOZZ	PAOZZ	PAOZZ				5310-00-809-8546	WASHER, FLAT: FUSEHOLDER MTG MS27183-8 96906	A	EA	4
14	39	XBOZZ	XBOZZ	XBGZZ					FUSEHOLDER: CONTROL BOX 13211E4825 97403	A	EA	1
14	40	PAFZZ	PAFZZ	PAGZZ				5305-00-984-6197	SCREW, MACHINE: RELAY PANEL ASSEMBLY MTG MS35206-249 96906	A	EA	4

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
14	41	PAFZZ	PAFZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: RELAY PANEL ASSEMBLY MTG MS27183-7 96906	A	EA	4
14	42	XBFZZ	XBFZZ	XBGZZ					SPACER 13215E228 297403	A	EA	4
14	43	PAFZZ	AFFFF	XBGZZ				6115-00-245-7693	RELAY AND BRACKET ASSEMBLY 13211E4824 497403	A	EA	1
14	44	PAFZZ	PAFZZ	PAGZZ					NUT, PLAIN, HEXAGON: RELAY SOCKET MTG NAS671B6 80205	A	EA	8
14	45	PAFZZ	PAFZZ	PAGZZ				5310-00-579-0079	WASHER, LOCK: RELAY SOCKET MTG MS35333-37 96906	A	EA	8
14	46	PAFZZ	PAFZZ	PAGZZ				5310-00-983-8483	WASHER, FLAT: RELAY SOCKET MTG MS27183-5 96906	A	EA	8
14	47	PAFZZ	PAFZZ	PAGZZ				5305-00-984-4983	SCREW, MACHINE: RELAY MTG MS35206-226 96906	A	EA	8
14	48	PAFZZ	PAFZZ	PAGZZ				5310-00-045-4007	WASHER, LOCK: RELAY MTG MS35338-41 96906	A	EA	8
14	49	PAFZZ	PAFZZ	PAGZZ				5945-00-435-1833	RELAY, ARMATURE 13211E6944 97403	A	EA	4
14	50	PAFZZ	XBFZZ	XBGZZ				5935-00-206-1400	SOCKET, RELAY 13211E4828 97403	A	EA	4
14	51	PAFZZ	PAFZZ	PAGZZ				5940-00-557-1631	TERMINAL, STUD MS17122-15 96906	A	EA	10
14	52	PAFZZ	PAFZZ	PAGZZ				5961-00-953-5138	SEMICONDUCTOR DEVICE: RELAY 13211E4826 97403	A	EA	1
14	53	PAFZZ	XBFZZ	XBGZZ				5940-01-030-4398	BOARD, PRINTED CIRCUIT 13211E4822 97403	A	EA	1
14	54	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY: PHASE SELECTOR TO TERMINAL LO 13211E4858-1 97403 MANUFACTURE FROM:	A	EA	1
14	55	PAFZZ	PAFZZ	PAGZZ				5940-00-804-0515	TERMINAL, LUG MS25036-128 96906	A	EA	1
14	56	PAFZZ	PAFZZ	PAGZZ				5940-00-557-4339	TERMINAL, LUG MS25036-126 96906	A	EA	1
14	57	PAFZZ	PAFZZ	PAGZZ				5961-00-953-5138	WIRE, ELECTRICAL MS50861-2-2-9 81349	A	FT	V
14	58	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY: PHASE SELECTOR SWITCH 13211E4858-4 97403 MANUFACTURE FROM:	A	EA	1
14	59	PAFZZ	PAFZZ	PAGZZ				5940-00-143-5284	TERMINAL, LUG MS25036-115 96906	A	EA	1
14	60	PAFZZ	PAFZZ	PAGZZ					TERMINAL, LUG 13211E4864-7 97403	A	EA	1
14	61	PAFZZ	PAFZZ	PAGZZ				6145-00-184-5490	WIRE, ELECTRICAL: M50861-2-8-9 81349	A	FT	V
14	62	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY, PHASE SELECTOR SWITCH 13211E4858-4 97403 MANUFACTURE FROM:	A	EA	1
14	63	XBFZZ	PAFZZ	PAGZZ					TERMINAL, LUG 13211E4864-7 97403	A	EA	1
14	64	XBFZZ	PAFZZ	PAGZZ				5940-00-143-5284	TERMINAL, LUG MS25036-115 96906	A	EA	1
14	65	PAFZZ	PAFZZ	PAGZZ				6145-00-184-5490	WIRE, ELECTRICAL M50861-2-8-9 81349	A	FT	V

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
14	66	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD, PHASE SELECTOR SWITCH MTG MS35291-58 96906	A	EA	4
14	67	PAFZZ	PAFZZ	PAGZZ				5310-00-080-6004	WASHER, FLAT, PHASE SELECTOR SWITCH MTG MS27183-14 96906	A	EA	4
14	68	PAFZZ	PAFZZ	PAGZZ				5310-00-809-5998	WASHER, FLAT, PHASE SELECTOR SWITCH MTG MS27183-18 96906	A	EA	4
14	69	PAFZZ	PAFZZ	PAGZZ				6115-00-056-4599	SWITCH, ROTARY, PHASE SELECTOR 13211E4808 97403	A	EA	1
14	70	PAOZZ	PAFZZ	PAGZZ				5305-00-984-6210	SCREW, MACHINE, PHASE SELECTOR PLATE MTG MS35206-263 96906	A	EA	4
14	71	PAOZZ	PAFZZ	PAGZZ				5310-00-809-8546	WASHER, FLAT, PHASE SELECTOR PLATE MTG MS27183-8 96906	A	EA	4
14	72	PAOZZ	PAFZZ	PAGZZ				5310-00-045-3296	WASHER, LOCK, PHASE SELECTOR PLATE MTG MS35338-43 96906	A	EA	4
14	73	XBOZZ	XBOZZ	XBOZZ					PLATE, DESIGNATION, PHASE SELECTOR SWITCH 13211E4808 97403	A	EA	1
14	74	PAOZZ	PAOZZ	PAGZZ				5305-00-984-6191	SCREW, MACHINE, CLAMP MS35206-243 96906	A	EA	4
14	75	PAOZZ	PAOZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT, CLAMP MTG MS27183-7 96906	A	EA	7
14	76	XBOZZ	XBOZZ	XBGZZ					CLAMP, LOOP, WIRING HARNESS MTG MS25281-4 96906	A	EA	1
14	77	XBOZZ	XBOZZ	XBGZZ					CLAMP, LOOP, WIRING HARNESS MTG MS25281-6 96906	A	EA	1
14	78	XBOZZ	XBOZZ	XBGZZ					CLAMP, LOOP, WIRING HARNESS MTG MS25281-10 96906	A	EA	3
15	1	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY, CIRCUIT BREAKER TO TERMINAL L1 13211E4858-1 97403 MANUFACTURE FROM	A	EA	1
15	2	PAFZZ	PAFZZ	PAGZZ				5940-00-904-0515	TERMINAL, LUG MS25036-128 96906	A	EA	1
15	3	PAFZZ	PAFZZ	PAGZZ				5940-00-557-4339	TERMINAL, LUG MS25036-126 96906	A	EA	1
15	4	PAFZZ	PAFZZ	PAGZZ				5961-00-953-5138	WIRE, ELECTRICAL M50861-2-2-9 81349	A	FT	V
15	5	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY, CIRCUIT BREAKER TO TERMINAL L2 13211E4858-2 97403 MANUFACTURE FROM	A	EA	1
15	6	PAFZZ	PAFZZ	PAGZZ				5940-00-804-0515	TERMINAL, LUG MS25036-128 96906	A	EA	1
15	7	PAFZZ	PAFZZ	PAGZZ				5940-00-557-4339	TERMINAL, LUG MS25036-126 96906	A	EA	1
15	8	PAFZZ	PAFZZ	PAGZZ				5961-00-953-5138	WIRE, ELECTRICAL M50861-2-2-9 81349	A	FT	V
15	9	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY, CIRCUIT BREAKER TO TERMINAL L3 NPN 19099 MANUFACTURE FROM	A	EA	1
15	10	PAFZZ	PAFZZ	PAGZZ				5940-00-804-0515	TERMINAL, LUG MS25036-128 96906	A	EA	1
15	11	PAFZZ	PAFZZ	PAGZZ				5940-00-557-4339	TERMINAL, LUG MS25036-126 96906	A	EA	1

(1) ILLUSTRATION a FIG. NO.	(1) ILLUSTRATION b ITEM NO.	(2) SMR CODE a ARMY	(2) SMR CODE b AIR FORCE	(2) SMR CODE c NAVY	(2) SMR CODE d USMC	(3) USMC a SSI	(3) USMC b REPL FACTOR	(4) NATIONAL STOCK NUMBER	(5) DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	(6) U/M	(7) QTY INC IN UNIT
15	12	PAFZZ	PAFZZ	PAGZZ				5961-00-953-5138	WIRE, ELECTRICAL M50861-2-2-9 81349	A	FT	V
15	13	PAFZZ	PAFZZ	PAGZZ				5305-00-984-4988	SCREW, MACHINE: MANUAL RESET BREAKER MTG MS35206-228 96906	A	EA	2
15	14	PAFZZ	PAFZZ	PAGZZ				5310-00-983-8483	WASHER, FLAT: MANUAL RESET BREAKER MTG MS27183-5 96906	A	EA	2
15	15	PAFZZ	PAFZZ	PAGZZ				5925-00-109-2231	CIRCUIT BREAKER, MANUAL RESET 13211E4839 97403	A	EA	1
15	16	PAOZZ	PAOZZ	PAGZZ				5930-00-685-9521	SWITCH, TOGGLE: FIELD FLASH MS35059-30 96906	A	EA	1
15	17	PAOZZ	PAOZZ	PAOZZ				5305-00-984-4988	SCREW, MACHINE: FIELD FLASH PLATE MTG MS35206-228 96906	A	EA	2
15	18	PAOZZ	PAOZZ	PAOZZ				5310-00-983-8483	WASHER, FLAT: FIELD FLASH PLATE MTG MS27183-5 96906	A	EA	2
15	19	XBOZZ	XBOZZ	XBOZZ					PLATE, IDENTIFICATION: FIELD FLASH 13211E4809 97403	A	EA	1
15	20	XBOZZ	XBOZZ	XBOZZ					NUT, SELF-LOCKING, HEXAGON: CONTROL BOX TOP 13211E4854-5 97403	A	EA	4
15	21	PAOZZ	PAOZZ	PAOZZ				5305-00-685-1344	SCREW, MACHINE: CONTROL BOX TOP NPN 19099	A	EA	4
15	22	PAFZZ	PAFZZ	PAGZZ				5305-00-984-6191	SCREW, MACHINE: CIRCUIT BREAKER MTG MS35206-243 96906	A	EA	6
15	23	PAFZZ	PAFZZ	PAGZZ				5310-00-045-3299	WASHER, LOCK: CIRCUIT BREAKER MTG MS35338-42 96906	A	EA	6
15	24	PAFZZ	PAFZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: CIRCUIT BREAKER MTG MS27183-7 96906	A	EA	6
15	25	PAFZZ	PAFZZ	PAGZZ				5925-00-493-1881	CIRCUIT BREAKER: MAIN 13211E4856 97403	A	EA	1
15	26	PAOZZ	PAOZZ	PAOZZ				5305-00-984-6191	SCREW, MACHINE: REMOTE TERMINAL BOARD MTG MS35206-243 96906	A	EA	4
15	27	PAOZZ	PAOZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: REMOTE TERMINAL BOARD MTG MS27183-7 96906	A	EA	4
15	28	XBFZZ	XBOZZ	XBGZZ					BOARD ASSEMBLY, TERMINAL: REMOTE CONTROL 13211E4778 97403	A	EA	1
15	29	PAFZZ	PAOZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: TERMINAL STUD 13211E4855-1 97403	A	EA	3
15	30	PAFZZ	PAOZZ	PAGZZ					WASHER, FLAT: TERMINAL STUD MS15795-810 96906	A	EA	12
15	31	PAFZZ	PAOZZ	PAGZZ					NUT, PLAIN, HEXAGON: TERMINAL STUD MS35690-411 96906	A	EA	9
15	32	PAFZZ	PAOZZ	PAGZZ				5310-00-184-8970	WASHER, LOCK: TERMINAL STUD MS35338-101 96906	A	EA	3
15	33	PAFZZ	PAOZZ	PAGZZ					WASHER, LOCK: TERMINAL STUD MS35333-91 96906	A	EA	6
15	34	XBFZZ	XBOZZ	XBGZZ					TERMINAL, STUD: REMOTE 13211E4821 97403	A	EA	3
15	35	XBFZZ	XBOZZ	XBGZZ					BOARD, TERMINAL 13211E4779 97403	A	EA	1
15	36	PAFZZ	PAFZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: TRANSFORMER MTG MS35206-245 96906	A	EA	4
15	37	PAFZZ	PAFZZ	PAGZZ				5310-00-809-8544	WASHER, FLAT: TRANSFORMER MTG MS27183-7 96906	A	EA	4
15	38	PAFZZ	AFFFF	PAGZZ				5950-00-787-8615	TRANSFORMER ASSEMBLY, CURRENT 13211E4852 97403	A	EA	1
15	39	MFFZZ	AFFZZ	AGGGG					LEAD ASSEMBLY: TRANSFORMER NPN 19099	A	EA	2

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
									MANUFACTURE FROM:			
15	40	PAFZZ	PAFZZ	PAGZZ					TERMINAL, LUG 13211E4864-3 97403	A	EA	4
15	41	PAFZZ	PAFZZ	PAGZZ				6145-00-543-0657	WIRE, ELECTRICAL FOR EACH LEAD M5086-2-18-9 81349	A	FT	V
15	42	XAOZZ	PAFZZ	PAGZZ				5905-00-050-1701	RESISTOR, FIXED, WIRE WOUND 13211E4829 97403	A	EA	3
15	43	XAOZZ	PAFZZ	XBGZZ					TRANSFORMER, CURRENT 13211E6894 97403	A	EA	1
15	44	PAFZZ	PAFZZ	PAGZZ					NUT, SELF-LOCKING, HEXAGON: LOAD TERMINAL BOARD MTG 13211E4855-1 97403	A	EA	4
15	45	PAFZZ	PAFZZ	PAGZZ				5310-00-809-4058	WASHER, FLAT: LOAD TERMINAL BOARD MTG MS27183-10 96906	A	EA	8
15	46	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: LOAD TERMINAL BOARD MTG MS35291-6 96906	A	EA	4
15	47	XBFZZ	AFFFF	XBGZZ					BOARD ASSEMBLY, TERMINAL: LOAD 13211E4777 97403	A	EA	1
15	48	PAFZZ	PAFGG	PAGZZ					NUT, PLAIN, HEXAGON: TERMINAL STUD MS35691-811 96906	A	EA	8
15	49	PAFZZ	PAFZZ	PAGZZ				5310-00-019-0669	WASHER, LOCK: TERMINAL STUD MS35333-105 96906	A	EA	4
15	50	PAFZZ	PAFZZ	PAGZZ					WASHER, FLAT, TERMINAL STUD MS15795-618 96906	A	EA	8
15	51	PAFZZ	PAFZZ	PAGZZ					WASHER, LOCK: TERMINAL STUD MS35333-95 96906	A	EA	4
15	52	XBFZZ	XBFZZ	XBGZZ					TERMINAL, STUD: SERVICE 13208E5820 97403	A	EA	4
15	53	XBFZZ	XBFZZ	XBGZZ					BOARD, TERMINAL 13211E4775 97403	A	EA	1
15	54	PAOFF	PAOZZ	PAGZZ				6110-00-764-7621	REGULATOR, VOLTAGE 13219E0883 97403		EA	1
15	54A	PAFZZ	PAFZZ	PAGZZ				5961-00-712-5578	TRANSISTOR, POWER 2N3442 05277		EA	1
15	55	MFFZZ	AFFZZ	PAGZZ				6115-00-924-8170	WIRING HARNESS, BRANCHED: CABINET 13211E4884 97403	A	EA	1
									MANUFACTURE FROM:			
		PAFZZ	PAFZZ	PAGZZ					CONNECTOR, RECEPTACLE 13211E4857 97403	A	EA	1
		PAFZZ	PAFZZ	PAGZZ				5975-00-074-2072	STRAP, TIEDOWN MS3367-1-9 96906	A	EA	1
		PAFZZ	PAFZZ	PAGZZ					TERMINAL, LUG 13211E4864-2 97403	A	EA	2
		PAFZZ	PAFZZ	PAGZZ				5940-00-114-1305	TERMINAL, LUG MS25036-116 96906	A	EA	2
		PAFZZ	PAFZZ	PAGZZ				5940-00-143-5284	TERMINAL, LUG MS25036-115 96906	A	EA	10
		PAFZZ	PAFZZ	PAGZZ					TERMINAL, LUG 13211E4864-3 97403	A	EA	1
		PAFZZ	PAFZZ	PAGZZ				6145-00-284-0657	WIRE, ELECTRICAL M5086-2-8-9 81349	A	FT	V
		PAFZZ	PAFZZ	PAGZZ				6145-00-578-7518	WIRE, ELECTRICAL M5086-1-18-9 81349	A	FT	V
15	56	XBHZZ	XBFZZ	XBGZZ					CABINET, CONTROL BOX 13211E4780 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)	(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
16	1	PAOZZ	PAOZZ	PAOZZ				5310-00-012-0614	NUT, HEXAGON: MACHINE: GROUND STRAP TO BOX MTG MS35650-102 96906	B	EA	1
16	2	PAOZZ	PAOZZ	PAOZZ				5305-00-989-7434	SCREW, MACHINE: STRAP MTG MS35207-263 96906	B	EA	1
16	3	PAOZZ	PAOZZ	PAOZZ				5310-00-080-9786	WASHER, LOCK: STRAP MTG MS45904-60 96906	B	EA	1
16	4	XBOZZ	PAOZZ	PAOZZ				6115-00-021-3326	STRAP, GROUNDING: CONTROL BOX 13211E6858 97403	B	EA	1
16	5	PAFZZ	PAOZZ	PAGZZ				5305-00-984-6193	SCREW, CAP, HEXAGON: CONNECTOR SHELL MTG MS35206-245 96906	B	EA	4
16	6	PAFZZ	PAOZZ	PAGZZ				5310-00-045-4007	WASHER, LOCK: CONNECTOR SHELL TO HOUSING MS35338-41 96906	B	EA	4
16	7	XBFZZ	XBOZZ	XBFZZ					CLAMP, CABLE: SLEEVING TO CLAMP 71-74936-78 77820	B	EA	1
16	8	XBFZZ	XBOZZ	XBGZZ					SPACER 3238568 44940	B	EA	V
16	9	XAOZZ	XBOZZ	XBGZZ					CONNECTOR, PLUG, ELECTRICAL 75-214836-78P 77820	B	EA	1
16	10	XBOZZ	XBFZZ	XBGZZ					SLEEVING: STATOR LEADS MILY1140 81349	B	EA	V
16	11	PAOZZ	PAOZZ	PAGZZ				5305-00-068-0501	SCREW, CAP: CONTROL BOX TO MOUNT MS90725-5 96906	B	EA	2
16	12	PAOZZ	PAOZZ	PAGZZ				5310-00-809-4058	WASHER, FLAT: CONTROL BOX TO MOUNT MS27183-10 96906	B	EA	2
16	13	PAFFF	AFFFF	PAGZZ				6110-00-938-5676	BOX ASSEMBLY, CONTROL 13216E1950 97403	B	EA	1
17	1	PAOZZ	PAOZZ	PAGZZ				5310-00-934-9757	NUT, PLAIN, HEXAGON: LEAD MTG MS35649-282 96906	B	EA	1
17	2	PAOZZ	PAOZZ	PAGZZ				5310-00-186-7358	WASHER, FLAT: LEAD MTG MS157-5-607 96906	B	EA	2
17	3	PAOZZ	PAOZZ	PAGZZ				5310-00-559-0070	WASHER, LOCK: LEAD MTG MS35333-38 96906	B	EA	1
17	4	MOOZZ	AOOZZ	AGGGG					LEAD, ELECTRICAL: LAMPHOLDER, TOGGLE AND SELECTOR SWITCH NPN 19099 MANUFACTURE FROM:	B	EA	5
17	5	PAOZZ	PAOZZ	PAGZZ				5940-00-557-1629	TERMINAL, LUG MS25036-149 96906	B	EA	2
17	6	PAOZZ	PAOZZ	PAGZZ				6145-00-548-2718	WIRE, ELECTRICAL HW-C18(16)J92 81349	B	FT	V
17	7	PAOZZ	PAOZZ	PAGZZ				5310-00-934-9757	NUT, PLAIN, HEXAGON: LEAD MTG MS35649-282 96906	B	EA	1
17	8	PAOZZ	PAOZZ	PAGZZ				5310-00-061-0004	WASHER, LOCK: LEAD MTG MS45904-57 96906	B	EA	2
17	9	PAOZZ	PAOZZ	PAGZZ				5305-00-993-1848	SCREW, MACHINE: LEAD MTG MS35207-265 96906	B	EA	1
17	10	MOOZZ	AOOZZ	AGGGG					LEAD, ELECTRICAL: PANEL LIGHT SWITCH NPN 19099 MANUFACTURE FROM:	B	EA	1
17	11	PAOZZ	PAOZZ	PAGZZ				5940-00-557-1629	TERMINAL, LUG MS25036-149 96906	B	EA	2
17	12	PAOZZ	PAOZZ	PAGZZ				6145-00-548-2718	WIRE, ELECTRICAL HW-C18(16)J92 81349	B	FT	V

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SSI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
17	13	HOOZZ	AOOZZ	AGGGG					LEAD, ELECTRICAL: VOLTAGE AND CURRENT METERS NPN 19099 MANUFACTURE FROM:	B	EA	3
17	14	PAOZZ	PAOZZ	PAGZZ				5940-00-557-1629	TERMINAL, LUG	B	EA	3
17	15	PAOZZ	PAOZZ	PAGZZ				5940-00-660-3631	TERMINAL, LUG	B	EA	3
17	16	PAOZZ	PAOZZ	PAGZZ				6145-00-548-2718	WIRE, ELECTRICAL	B	FT	V
17	17	PAPZZ	PAPZZ	PAGZZ				5305-00-984-4984	SCREW, MACHINE: SUPPORT HINGE MTG MS35206-227 96906	B	EA	2
17	18	PAPZZ	PAPZZ	PAGZZ				5310-00-209-0788	WASHER, LOCK: SUPPORT, FALL MTG MS35335-30 96906	B	EA	2
17	19	PAPZZ	PAPZZ	PAGZZ				5310-00-013-4530	NUT, PLAIN, HEXAGON: SUPPORT FALL MTG MS35649-62 96906	B	EA	2
17	20	PAPZZ	PAPZZ	PAGZZ				5305-00-984-4988	SCREW, MACHINE: SUPPORT HINGE TO PANEL MTG MS35206-228 96906	B	EA	2
17	21	XBPZZ	XBPZZ	XBGZZ					SUPPORT, FALL: PANEL HINGE 13211E6904 97403	B	EA	1
17	22	PAPZZ	PAPZZ	PAGZZ				5305-00-957-6265	SCREW, MACHINE: SUPPORT HINGE TO SPACER MTG MS35190-234 96906	B	EA	2
17	23	XBPZZ	XBPZZ	XBGZZ					SPACER, SUPPORT, PANEL 13211E6913 97403	B	EA	2
17	24	PAPZZ	PAPZZ	PAGZZ				5310-00-934-9739	NUT, PLAIN, HEXAGON: BRACKET MTG MS35649-242 96906	B	EA	2
17	25	PAPZZ	PAPZZ	PAGZZ				5310-00-543-2410	WASHER, LOCK: BRACKET MTG MS35338-40 96906	B	EA	2
17	26	PAPZZ	PAPZZ	PAGZZ				5310-00-950-1310	WASHER, FLAT: BRACKET MTG MS27183-4 96906	B	EA	2
17	27	PAPZZ	PAPZZ	PAGZZ				5305-00-889-2999	SCREW, MACHINE: BRACKET MTG MS35206-217 96906	B	EA	2
17	28	PAPZZ	PAPZZ	PAGZZ				5305-00-984-6192	SCREW, MACHINE: BRACKET MTG MS35206-244 96906	B	EA	2
17	29	PAPZZ	PAPZZ	PAGZZ				5310-00-934-9757	NUT, PLAIN, HEXAGON: BRACKET MTG MS35649-282 96906	B	EA	2
17	30	PAPZZ	PAPZZ	PAGZZ				5310-00-596-7693	WASHER, LOCK: BRACKET MTG MS35335-31 96906	B	EA	2
17	31	XBPZZ	XBPZZ	XBGZZ					BRACKET: CONTROL PANEL MTG 13211E6927 97403	B	EA	1
17	32	XBPZZ	XBPZZ	XBGZZ					BRACKET: CABLE STRAP MTG 13211E6985 97403	B	EA	1
17	33	PAPZZ	PAPZZ	PAGZZ				5320-00-117-6938	RIVET: FASTENER MTG MS20426D3-4 96906	B	EA	12
17	34	XBPZZ	PAPZZ	PAGZZ				5325-00-543-3237	FASTENER, RECEPTACLE: PANEL 13211E6882 97403	B	EA	6
17	35	PAPZZ	PAPZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: HINGE MTG MS35207-261 96906	B	EA	5
17	36	PAPZZ	PAPZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: HINGE MTG MS35335-32 96906	B	EA	5
17	37	PAPZZ	PAPZZ	PAGZZ				5310-00-337-8329	WASHER, FASTENER: PANEL MTG 13211E6887 97403	B	EA	5
17	38	PAOZZ	PAPZZ	PAGZZ				5325-00-290-397.	FASTENER, SLOTTED HEAD: PANEL MTG 13211E6914 97403	B	EA	5

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
17	39	XBFZZ	XBFZZ	XBGZZ					PANEL ASSEMBLY: CONTROL 13211E6877 97403	B	EA	1
17	40	PAFZZ	PAFZZ	PAGZZ				5320-00-117-6939	RIVET: HINGE MTG MS20426D4-5 96906	B	EA	6
17	41	XBFZZ	XBFZZ	XBGZZ					HINGE: PANEL MTG MS35823-1A 96906	B	EA	1
17	42	PAOZZ	PAOZZ	PBHZZ				6645-00-089-8842	METER, TIME TOTALIZING 73-0507 30554		EA	1
17	43	PAOZZ	PAOBZ	PBHZZ				6620-00-056-9584	INDICATOR: OIL PRESSURE 13211E6929 97403		EA	1
17	44	PAOZZ	PAOBZ	PBHZZ				6625-00-066-1728	AMMETER: BATTERY CHARGING 13211E6918 97403		EA	1
17	45	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1582	SWITCH, TOGGLE: REMOTE, LOCAL MS35059-23 96906		EA	1
17	46	PAOZZ	PAOZZ	PAGZZ				5930-00-615-9376	SWITCH, TOGGLE: EMERGENCY STOP AND START MS35059-21 96906		EA	1
17	47	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1518	SWITCH, TOGGLE: ENGINE START AND STOP MS35058-27 96906		EA	1
17	48	XBOZZ	XBFZZ	XBGZZ					KNOB, POINTER: AMMETER SELECTOR MS91528-1K2B 96906		EA	1
17	49	PAOZZ	PAOZZ	PAGZZ				5930-00-538-5506	SWITCH, ROTARY: AMP SELECTOR MS25002-1 96906	B	EA	1
17	50	XBOZZ	XBFZZ	XBGZZ					KNOB, POINTER: SELECTOR SWITCH MS91528-1K2B 96906	B	EA	1
17	51	PAOZZ	AOOOO	PAGZZ				5930-00-832-5174	SWITCH, ASSEMBLY: VOLTAGE SELECTOR 13211E6931 97403	B	EA	1
17	52	XBOZZ	PAOZZ	PAGZZ				5930-00-259-4646	SWITCH, ROTARY: VOLTAGE MS25002-2 96906	B	EA	1
17	53	XAOZZ	XBOZZ	XBGZZ					STRAP, BOND: ROTARY SWITCH 13211E6934-2 97403	B	EA	5
17	54	XBOZZ	XBFZZ	XBGZZ					KNOB, POINTER: RHEOSTAT MS91528-1K2B 96906	B	EA	1
17	55	PAOZZ	AOOOO	PAGZZ				5905-00-021-3352	RHEOSTAT AND JUMPER ASSEMBLY 13211E9633 97403	B	EA	1
17	56	XBOZZ	PAOZZ	PAGZZ				5905-00-065-8594	RHEOSTAT M22-03-00191FD 81349	B	EA	1
17	57	XBOZZ	XBOZZ	XBGZZ					STRAP, BOND: RHEOSTAT 13211E6934-1 97403	B	EA	1
17	58	PAOZZ	PAOZZ	PAGZZ				6210-00-065-5260	HOLDER, LAMP 13211E6920 97403	B	EA	2
17	59	PAOZZ	PAOZZ	PAOZZ				6240-00-155-8714	LAMP, INCANDESCENT MS15571-4 96906	B	EA	2
17	60	PAOZZ	PAOZZ	PAGZZ				5930-00-655-1514	SWITCH, TOGGLE: PANEL LIGHT MS35058-22 96906		EA	1
17	61	PAOZZ	PAOBZ	PBHZZ				6625-00-065-5301	VOLTMETER, AC: GENERATOR 13211E6905 97403		EA	1
17	62	PAOZZ	PAOBZ	PBHZZ				6625-00-893-9000	AMMETER 13211E6919 97403		EA	1
17	63	PAOZZ	PAOBZ	PBHZZ				6625-00-045-7625	METER, FREQUENCY 13211E6992-2 97403	B	EA	1
18	1	PAFZZ	PAFZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: DRIP COVER MTG MS35207-261 96906	B	EA	2
18	2	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: DRIP COVER MTG MS35325-32 96906	B	EA	2

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
18	3	XBFZZ	XBFZZ	XBGZZ					COVER, DRIP: CONTROL BOX 13216E1960 97403	B	EA	1
18	4	PAFZZ	PAFZZ	PAGZZ				5320-00-903-6767	RIVET: PLATE MTG MS24662-3 96906	B	EA	2
18	5	XBFZZ	MDFZZ	XBOZZ					PLATE, IDENTIFICATION: CIRCUIT BREAKER 13211E6888 97403	B	EA	1
18	6	XBFZZ	AFFZZ	AGGZZ					COVER ASSEMBLY: TERMINAL BOARD 13216E1956 97403	B	EA	1
18	7	XAOZZ	XBFZZ	XBGZZ					HINGE: COVER MS35823-1A 96906	B	EA	1
18	8	PAOZZ	PAOZZ	PAGZZ				5310-00-337-8329	WASHER, FASTENER: COVER ASSMELBY 13211E6887 97403	B	EA	1
18	9	PAOZZ	PAOZZ	PAGZZ				5325-00-938-5669	FASTENER, WING: COVER ASSEMBLY 13211E6886 97403	B	EA	1
18	10	PAOZZ	PAOZZ	XBOZZ				5320-00-903-6767	RIVET: PLATE MTG MS24662-3 96906	B	EA	4
18	11	XBOZZ	MDOZZ	XBOZZ					NAMEPLATE: INFORMATION COVER ASSEMBLY 13216E1958 97403	B	EA	1
18	12	PAFZZ	PAFZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: COVER MTG MS35207-261 96906	B	EA	8
18	13	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: COVER MTG MS35335-32 96906	B	EA	8
18	14	XBFZZ	XBFZZ	XBGZZ					COVER, CONTROL BOX, VERTICAL 13216E1953 97403	B	EA	1
18	15	PAOZZ	PAOZZ	PAGZZ				5305-00-015-4964	SCREW, MACHINE: CIRCUIT BREAKER MTG 154964 24617	B	EA	8
18	16	PAOZZ	PAOZZ	PAGZZ				5310-00-209-0788	WASHER, LOCK: CIRCUIT BREAKER MTG MS35335-30 96906	B	EA	8
18	17	PAOZZ	PAOZZ	PAGZZ				5925-00-051-2003	CIRCUIT BREAKER 13216E1959 97403	B	EA	1
18	18	XBFZZ	AOOOO	XBGZZ					TERMINAL BOARD ASSEMBLY 13216E1954 97403	B	EA	1
18	19	PAFZZ	PAOZZ	PAGZZ					NUT, HEXAGON: BRASS, STUD MTG 871-15 44940	B	EA	12
18	20	PAFZZ	PAOZZ	PAGZZ				5310-00-282-1349	WASHER, FLAT: STUD MTG FFW92 81349	B	EA	8
18	21	PAFZZ	PAOZZ	PAGZZ				5310-00-550-1130	WASHER, LOCK: STUD MTG MS35333-40 96906	B	EA	6
18	22	PAFZZ	PAOZZ	PAGZZ				5310-00-209-0786	WASHER, LOCK: STUD MTG MS35333-33 96906	B	EA	6
18	23	PAFZZ	PAOZZ	PAGZZ				5307-00-688-0125	STUD, TERMINAL BOARD 13211E6911 97403	B	EA	3
18	24	PAFZZ	PAOZZ	PAGZZ					NUT, PLAIN, HEXAGON: CONNECTOR MTG 871-40 44940	B	EA	8
18	25	PAFZZ	PAOZZ	PAGZZ				5310-00-577-5354	WASHER, LOCK: CONNECTOR MTG MS35338-105 96906	B	EA	4
18	26	PAFZZ	PAOZZ	PAGZZ					WASHER, FLAT: BRASS, CONNECTOR MTG 526-53 44940	B	EA	6
18	27	PAFZZ	PAOZZ	PAGZZ				5310-00-042-4229	WASHER, LOCK: CONNECTOR MTG MS35333-113 96906	B	EA	4
18	28	PAFZZ	PAOZZ	PAGZZ				5940-00-943-7740	CONNECTOR, TERMINAL POST 13213E3949 97403	B	EA	4
18	29	PAFZZ	XBOZZ	XBGZZ				5940-01-181-4030	TERMINAL BOARD 13216E1955 97403	B	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
19	1	PAFZZ	PAOZZ	PAGZZ				5305-00-984-6208	SCREW, MACHINE: CLAMP MTG MS35206-261 96906	B	EA	1
19	2	PAFZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CLAMP MTG MS35335-32 96906	B	EA	1
19	3	XBFZZ	XBOZZ	XBGZZ					CLAMP, LOOP, STEEL, CUSHIONED: WIRING HARNESS MS21333-73 96906	B	EA	1
19	4	PAFZZ	PAOZZ	PAGZZ				5305-00-984-4988	SCREW, MACHINE: CONVERTER MTG MS35206-228 96906	B	EA	4
19	5	PAFZZ	PAOZZ	PAGZZ				5310-00-596-7693	WASHER, LOCK: CONVERTER MTG MS35335-31 96906	B	EA	4
19	6	PAFZZ	PAOZZ	PAGZZ				6115-00-659-2786	CONVERTER, FREQUENCY METER 13212E8933 97403	B	EA	1
19	7	PAFZZ	PAOZZ	PAGZZ				5310-00-013-4524	NUT, PLAIN, HEXAGON: SHELL MTG MS35649-42 96906	B	EA	4
19	8	PAFZZ	PAOZZ	PAGZZ				5310-00-616-3554	WASHER, LOCK: SHELL MTG MS35335-29 96906	B	EA	4
19	9	PAFZZ	PAOZZ	PAGZZ				5305-00-889-2997	SCREW, MACHINE: SHELL MTG MS35206-215 96906	B	EA	4
19	10	PAFZZ	XBOZZ	XBGZZ				5935-00-021-3322	SHELL, FEED THROUGH: WIRING HARNESS 13211E6840-1 97403	B	EA	1
19	11	PAFZZ	PAFZZ	PAGZZ				5310-00-012-0614	NUT, PLAIN, HEXAGON: BRACKET MTG MS35650-102 96906	B	EA	2
19	12	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: BRACKET MTG MS35335-32 96906	B	EA	2
19	13	PAFZZ	PAFZZ	PAGZZ				5305-00-088-9044	SCREW, MACHINE: SWITCH MTG MS35207-260 96906	B	EA	4
19	14	PAFZZ	PAFZZ	PAGZZ				5310-00-045-3296	WASHER, LOCK, SPRING: SWITCH MTG MS35338-43 96906	B	EA	4
19	15	PAFZZ	AFFFF	XBGZZ				5390-01-114-9243	SWITCH ASSEMBLY: OUTPUT RECONNECT 13216E1961 97403	B	EA	1
19	16	XBFZZ	XBFZZ	XBGZZ					BRACKET: SWITCH MTG 13216E1963 97403	B	EA	1
19	17	XBFZZ	XBFZZ	XBGZZ					INSERT, THREADED: BRACKET MTG 13211E6879-3 97403	B	EA	2
19	18	XBFZZ	XBFZZ	XBGZZ					BRACKET: SWITCH MTG 13216E1964 97403	B	EA	1
19	19	XBFZZ	XBFZZ	XBGZZ					INSERT, THREADED 13211E6879-3 97403	B	EA	2
19	20	PAFZZ	PAFZZ	PAGZZ				5320-00-903-6767	RIVET, BLIND, DRIVE: PLATE MTG MS24662-3 96906	B	EA	1
19	21	XBFZZ	MDFZZ	XBGZZ					PLATE, INFORMATION: LOAD TERMINALS 13216E1965 97403	B	EA	1
19	22	PAFZZ	PAFZZ	PAGZZ				5930-00-044-5090	SWITCH, OUTPUT 13216E1962 97403	B	EA	1

(1) ILLUSTRATION a FIG. NO.	b ITEM NO.	(2) SMR CODE a ARMY	b AIR FORCE	c NAVY	d USMC	(3) USMC a SSI	b REPL FACTOR	(4) NATIONAL STOCK NUMBER	(5) DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	(6) U/M	(7) QTY INC IN UNIT
19A	1	PAFZZ	PAFZZ	PAFZZ				5975-00-074-2072	STRAP,TIEDOWN MS3367-1-9	96906	EA	25
19A	2	PAFZZ	PAFZZ	PAFZZ					BAR,STRAIN RELIEF 13211E6841-1	97403	EA	1
19A	3	PAFZZ	PAFZZ	PAFZZ					CLAMP,CABLE 13211E6842-1	97403	EA	1
19A	4	PAFZZ	PAFZZ	PAFZZ					CONNECTOR,PLUG 13211E6834-1	97403	EA	1
19A	5	PAFZZ	PAFZZ	PAFZZ					INSULATION MIL1744TYPE1	81349	FT	V
19A	6	PAFZZ	PAFZZ	PAFZZ				5940-00-143-4780	TERMINAL,LUG MS25036-108	96906	EA	4
19A	7	PAFZZ	PAFZZ	PAFZZ				5940-00-283-5280	TERMINAL,LUG MS25036-106	96906	EA	4
19A	8	PAFZZ	PAFZZ	PAFZZ				5940-00-113-8184	TERMINAL,LUG MS25036-150	96906	EA	10
19A	9	PAFZZ	PAFZZ	PAFZZ				5940-00-143-4771	TERMINAL,LUG MS25036-103	96906	EA	16
19A	10	PAFZZ	PAFZZ	PAFZZ				5940-00-557-1629	TERMINAL,LUG MS25036-149	96906	EA	5
19A	11	PAFZZ	PAFZZ	PAFZZ				5940-00-204-8966	TERMINAL,LUG MS25036-102	96906	EA	46
19A	12	PAFZZ	PAFZZ	PAFZZ				6145-00-578-7518	WIRE,ELECTRICAL M5086/2-18-9	81349	FT	V
19A	13	PAFZZ	PAFZZ	PAFZZ				6145-00-578-7517	WIRE,ELECTRICAL M5086/2-16-9	81349	FT	V
19A	14	PAFZZ	PAFZZ	PAFZZ					HOUSING,RECEPTACLE 13211E6956	97403 00779	EA	2
19A	15	PAFZZ	PAFZZ	PAFZZ					RECEPTACLE 13211E6955	97403 00779	EA	2

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SIS	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
19B		MFFZZ	MFFZZ	MFFZZ					WIRING HARNESS 13216E1974 97403		EA	REF
19E	1	PAFZZ	PAFZZ	PAFZZ				5975-00-906-2414	STRAP,CABLE 13208E8536 97403 59730		EA	1
19B	2	PAFZZ	PAFZZ	PAFZZ					STRAP,TIEDOWN MS3367-1-9 96906		EA	2
19B	3	PAFZZ	PAFZZ	PAFZZ					TERMINAL,INSULATED 13216E1977 97403		EA	2
19B	4	PAFZZ	PAFZZ	PAFZZ				5940-00-559-4341	TERMINAL,LUG MS25036-123 96906		EA	2
19B	5	PAFZZ	PAFZZ	PAFZZ					TERMINAL,INSULATED 13216E1978 97403		EA	1
19B	6	PAFZZ	PAFZZ	PAFZZ				5940-00-114-1305	TERMINAL,LUG MS25036-116 96906		EA	1
19B	7	PAFZZ	PAFZZ	PAFZZ				6145-00-578-6565	WIRE,ELECTRICAL M5086/2-4-9 81349		FT	V
19B	8	PAFZZ	PAFZZ	PAFZZ				6145-00-284-0657	WIRE,ELECTRICAL M5086/2-8-9 81349		FT	V
20	1	PAFZZ	PAFZZ	PAGZZ					NUT,HEXAGON: RELAY BRACKET MTG MS35650-302 96906	B	EA	3
20	2	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER,LOCK: RELAY BRACKET MTG MS35335-32 96906	B	EA	5
20	3	PAFZZ	PAFZZ	PAGZZ				5305-00-990-6444	SCREW,MACHINE: RELAY BRACKET MTG MS35207-261 96906	B	EA	5
20		AFFFF	AFFFF	AGGGG					PANEL ASSEMBLY: RELAY 13211E6926 97403	B	EA	1
20	4	PAFZZ	AFFFF	PAGZZ					RESISTOR RC42GF271K 81349	B	EA	2
20	5	PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M5086/1-16-9 81349	B	FT	V

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a	b	a	b	c	d	a	b					
FIG. NO.	ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	SAE	REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	DESCRIPTION	USABLE ON CODE	U/M	QTY INC. IN UNIT
20	5	PAPZZ	PAPZZ	PAGZZ				5905-00-050-1674	RESISTOR 350-1129 44940		B	EA	2
20	6	PAPZZ	PAPZZ	PAGZZ				5940-00-204-8966	TERMINAL: RESISTOR LEAD MTG MS25036-2 96906		B	EA	2
20	7	PAPZZ	PAPZZ	PAGZZ				5930-00-685-9521	SWITCH, TOGGLE: FIELD FLASH MS35059-30 96906		B	EA	1
20	8	XBOZZ	MDOZZ	XEOZZ					NAMEPLATE: RELAY FIELD FLASH SWITCH 13211E6949 97403		B	EA	1
20	9	PAPZZ	PAPZZ	PAGZZ				5305-00-889-3116	SCREW, MACHINE: INSULATOR MTG MS35206-213 96906		B	EA	1
20	10	PAPZZ	PAPZZ	PAGZZ				5310-00-616-3554	WASHER, LOCK: INSULATOR MTG MS35335-29 96906		B	EA	1
20	11	XBPZZ	XBPZZ	XBGZZ					INSULATOR, STANDOFF: STYLE SE2000002 MILT55155-20 96906		B	EA	1
20	12	PAPZZ	PAPZZ	PAGZZ				5905-00-021-3346	RESISTOR, FIXED: 9090 OHM, 1 WATT RN70D9091F 81349		B	EA	1
20	13	PAPZZ	PAPZZ	PAGZZ				5905-00-021-3347	RESISTOR, FIXED: 4320 OHM, 1 WATT RN70D4321F 81349		B	EA	1
20	14	PAPZZ	PAPZZ	PAGZZ				5905-00-021-3348	RESISTOR, FIXED: 7680 OHM, 1 WATT RN70D7681F 81349		B	EA	1
20	15	PAPZZ	PAPZZ	PAGZZ				5905-00-021-3349	RESISTOR, FIXED: 17400 OHM, 1 WATT RN70D1742F 81349		B	EA	1
20	16	PAPZZ	PAPZZ	PAGZZ				6130-00-070-8887	DIODE, SILICON 13211E6947 97403		B	EA	1
20	17	XBPZZ	PAPZZ	PAGZZ				5970-00-991-9327	SLEEVING, INSULATION: RECTIFIER DIODE 362 96904		B	EA	1
20	18	PAPZZ	PAPZZ	PAGZZ				5305-00-984-4943	SCREW, MACHINE: RELAY MTG MS35206-226 96906		B	EA	8
20	19	XBPZZ	XBPZZ	XBGZZ				5310-00-209-0788	WASHER, LOCK: RELAY AND SOCKET MTG MS35335-30 96906		B	EA	8
20	20	PAPZZ	PAPZZ	PAGZZ				5945-00-066-7876	RELAY 13211E6944 97403		B	EA	4
20	21	PAPZZ	PAPZZ	PAGZZ				5310-00-013-4530	NUT, HEXAGON, MACHINE: INSULATOR MTG MS35649-62 96906		B	EA	8
20	22	PAPZZ	PAPZZ	PAGZZ					SCREW, MOUNTING: SOCKET 13211E6942 97403		B	EA	8
20	23	XBPZZ	PAPZZ	PAGZZ				5935-00-021-3350	SOCKET, RELAY 13211E6941 97403		B	EA	4
20	24	PAPZZ	PAPZZ	PAGZZ				5310-00-013-4530	NUT, HEXAGON, MACHINE: TERMINAL BOARD MTG MS35649-62 96906		B	EA	4
20	25	PAPZZ	PAPZZ	PAGZZ				5310-00-579-0079	WASHER, LOCK: INSULATOR MTG MS35333-37 96906		B	EA	4
20	26	XBPZZ	XBPZZ	XBGZZ					INSULATOR: TERMINAL BOARD 13211E6940 97403		B	EA	1
20	27	PAPZZ	PAPZZ	PAGZZ				5305-00-889-3001	SCREW, MACHINE: TERMINAL BOARD MTG MS35206-231 96906		B	EA	4
20	28	XBPZZ	XBPZZ	XBGZZ					BOARD, TERMINAL: RELAY 13211E6939 97403		B	EA	1
20	29	XBPZZ	XBPZZ	XBGZZ					BRACKET, RELAY 13211E6938 97403		B	EA	1
21	1	PAPZZ	PAPZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: COVER MTG MS35207-261 96906		B	EA	6
21	2	PAPZZ	PAPZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: COVER MTG MS35335-32 96906		B	EA	6

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a	b	a	b	c	d	a	b	NATIONAL STOCK NUMBER	DESCRIPTION	USABLE ON CODE	U/M	QTY INC IN UNIT
FIG. NO.	ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	SSI	REPL FACTOR		REF NUMBER & MFR CODE			
21	3	XBFZZ	XBFZZ	XBGZZ					COVER, CONTROL BOX, LOWER 13216E1952 97403	B	EA	1
21	4	XBFZZ	XBFZZ	XBGZZ					INSERT: LOWER COVER, VOLTAGE REGULATOR AND RELAY PANEL 13211E6879-3 97403	B	EA	41
21	5	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: CAPACITOR MTG MS35207-261 96906	B	EA	1
21	6	PAOZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CAPACITOR MTG MS35335-32 96906	B	EA	1
21	7	PAOZZ	PAOZZ	PAGZZ				5910-00-577-1348	CAPACITOR CA37KFW103 81349	B	EA	1
21	8	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: CAPACITOR MTG MS35207-261 96906	B	EA	1
21	9	PAOZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CAPACITOR MTG MS35335-32 96906	B	EA	1
21	10	PAOZZ	PAOZZ	PAGZZ				5910-00-577-1349	CAPACITOR CA36KFW103 81349	B	EA	1
21	11	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: CAPACITOR MTG MS35207-261 96906	B	EA	1
21	12	PAOZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CAPACITOR MTG MS35335-32 96906	B	EA	1
21	13	PAOZZ	PAOZZ	PAGZZ				5910-00-557-1349	CAPACITOR CA36KFW103 81349	B	EA	1
21	14	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: CAPACITOR MTG MS35207-261 96906	B	EA	1
21	15	PAOZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CAPACITOR MTG MS35335-32 96906	B	EA	1
21	16	PAOZZ	PAOZZ	PAGZZ				5910-00-577-1349	CAPACITOR CA36KFW103 81349	B	EA	1
21	17	PAOZZ	PAOZZ	PAGZZ				5305-00-990-6444	SCREW, MACHINE: CONNECTOR MTG MS35207-261 96906	B	EA	4
21	18	PAOZZ	PAOZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: CONNECTOR MTG MS35335-32 96906	B	EA	4
21	19	XBOZZ	XBOZZ	XBGZZ					PLATE, RETAINING: CONNECTOR, RECEPTACLE NPN 19099	B	EA	1
21	20	XBOZZ	XBOZZ	XBGZZ					CONNECTOR, RECEPTACLE 13211E4857-2 97403	B	EA	1
21	21	PAFZZ	PAFZZ	PAGZZ					NUT, PLAIN, HEXAGON: RESISTOR MTG MS35648-82 96906	B	EA	6
21	22	PAFZZ	PAFZZ	PAGZZ				5310-00-186-7358	WASHER, FLAT: RESISTOR MTG MS15795-607 96906	B	EA	6
21	23	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: RESISTOR MTG MS35335-32 96906	B	EA	6
21	24	PAFZZ	PAFZZ	PAGZZ				5905-00-050-1701	RESISTOR 13211E4029 97403	B	EA	3
21	25	PAFZZ	PAFZZ	PAGZZ				5305-00-989-7435	SCREW, MACHINE: TRANSFORMER MTG MS35207-264 96906	B	EA	6
21	26	PAFZZ	PAFZZ	PAGZZ				5310-00-596-7691	WASHER, LOCK: TRANSFORMER MTG MS35335-32 96906	B	EA	6
21	27	XBFZZ	XBFZZ	XBGZZ					STRAP: CURRENT TRANSFORMER MTG 13211E6895 97403	B	EA	2
21	28	PAFZZ	PAFZZ	PAGZZ				5905-00-910-9381	TRANSFORMER, CURRENT 13211E6894 97403	B	EA	1
21	29	PAOZZ	PAOZZ	PAGZZ				6110-00-764-7621	REGULATOR, VOLTAGE 13219E0883 97403	B	EA	1
21	30	PAFZZ	PAFZZ	PAGZZ				5320-00-903-6767	RIVET: PLATE MTG MS24662-3 96906	B	EA	6
21	31	XBFZZ	XBFZZ	XBGZZ					PLATE, ELECTRICAL DIAGRAMS: CONTROL BOX 13216E1969 97403	B	EA	1
21	32	XBFZZ	XBFZZ	XBGZZ					BOX, CONTROL 13216E1951 97403	B	EA	1

(1) ILLUSTRATION a FIG. NO.	b ITEM NO.	(2) SMR CODE a ARMY	b AIR FORCE	c NAVY	d USMC	(3) USMC a SIS	b REPL FACTOR	(4) NATIONAL STOCK NUMBER	(5) DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	(6) U M	(7) QTY INC IN UNIT
21A		PAOFF	PAOFF	PAOFF				6110-00-764-7621	VOLTAGE REGULATOR ASSEMBLY 13219E0883 97403		EA	REF
21A	1	PAFZZ	PAFZZ	PAFZZ				5310-00-934-9739	NUT,HEX MS35649-242 96906		EA	4
21A	2	PAFZZ	PAFZZ	PAFZZ				5310-00-616-3554	WASHER,LOCK MS35335-29 96906		EA	4
21A	3	PAFZZ	PAFZZ	PAFZZ				5310-00-634-0111	WASHER,FLAT MS15795-703 96906		EA	4
21A	4	PAFZZ	PAFZZ	PAFZZ				5305-00-893-2989	SCREW,MACHINE MS35206-217 96906		EA	4
21A	5	MFFZZ	MFFZZ	MFFZZ					HARNESS,WIRING 13219E0868 97403		EA	1
21A		PAFZZ	PAFZZ	PAFZZ				5935-00-755-2896	MANUFACTURE FROM: CONNECTOR MS3100R20-27P 96906		EA	1
21A		PAFZZ	PAFZZ	PAFZZ					GROMMET 13219E0891 97403		EA	1
21A		PAFZZ	PAFZZ	PAFZZ				5325-00-276-6228	GROMMET MS35489-9 96906		EA	1
21A		PAFZZ	PAFZZ	PAFZZ				5940-00-204-8966	TERMINAL,LUG MS25036-102 96906		EA	3
21A		PAFZZ	PAFZZ	PAFZZ				5975-00-727-5153	STRAP,TIEDOWN MS36/-4-9 96906		EA	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-1 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-2 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-838-6619	WIRE,ELECTRICAL M16878/1-18-3 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-087-9716	WIRE,ELECTRICAL M16878/1-18-4 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-881-8177	WIRE,ELECTRICAL M16878/1-18-5 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-849-5915	WIRE,ELECTRICAL M16878/1-18-6 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-087-7691	WIRE,ELECTRICAL M16878/1-18-7 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-729-9264	WIRE,ELECTRICAL M16878/1-18-8 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-643-0651	WIRE,ELECTRICAL M16878/1-18-9 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-814-8127	WIRE,ELECTRICAL M16878/1-18-0 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-91 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-92 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878-18-93 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-838-6612	WIRE,ELECTRICAL M16878/1-18-94 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-95 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-96 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ				6145-00-851-0898	WIRE,ELECTRICAL M16878/1-18-97 81349		FT	V
21A		PAFZZ	PAFZZ	PAFZZ					WIRE,ELECTRICAL M16878/1-18-98 81349		FT	V

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
21A	6	PAFZZ	PAFZZ	PAFZZ				5305-00-889-3001	SCREW,MACHINE MS35206-230 96906		EA	2
21A	7	PAFZZ	PAFZZ	PAFZZ				5310-00-045-4007	WASHER,LOCK MS35338-41 96906		EA	2
21A	8	PAFZZ	PAFZZ	PAFZZ					GUIDE,CARD 13219E0896 97403 2500-38 07656		EA	2
21A	9	PAFZZ	PAFZZ	PAFZZ				5310-00-934-9757	NUT,HEX MS35649-282 96906		EA	2
21A	10	PAFZZ	PAFZZ	PAFZZ				5310-00-595-7683	WASHER,LOCK MS35335-31 96906		EA	2
21A	11	PAFZZ	PAFZZ	PAFZZ				5310-00-765-3197	WASHER,FLAT MS27183-41 96906		EA	2
21A	12	PAFZZ	PAFZZ	PAFZZ				5305-01-092-8685	SCREW,MACHINE MS35206-255 96906		EA	2
21A		PAFZZ	PAFZZ	PAFZZ					SHIM 13219E9739 97403		EA	V
21A	13	PAFZZ	PAFZZ	PAFZZ				5950-01-104-6342	TRANSFORMER 13219E0890 97403 BX5960 85323		EA	1
21A	14	PAFZZ	PAFZZ	PAFZZ				5320-01-109-1381	RIVET M24243/4-A403 81349		EA	2
21A	15	PAFZZ	PAFZZ	PAFZZ				5310-00-656-0111	WASHER,FLAT MS15795-703 96906		EA	2
21A	16	PAFZZ	PAFZZ	PAFZZ				5950-01-105-6315	TRANSFORMER 13219E0894 97403 BX5961 85323		EA	1
21A	17	PAFZZ	PAFZZ	PAFZZ				5305-00-889-3001	SCREW,MACHINE MS35206-231 96906		EA	2
21A	18	PAFZZ	PAFZZ	PAFZZ				5310-00-045-4007	WASHER,LOCK MS35338-41 96906		EA	2
21A	19	PAFZZ	PAFZZ	PAFZZ				5935-00-931-0382	SOCKET,TRANSISTOR 13219E0895 97403 8060-1G1 91506		EA	1
21A	20	PAFZZ	PAFZZ	PAFZZ				5961-00-712-5579	TRANSISTOR 13217E3700 97403 2N4347 02735		EA	1
21A	21	PBFZZ	PBFZZ	PBFZZ					PLATE,IDENTIFICATION 13219E1039 97403		EA	1
21A	22	PBFZZ	PBFZZ	PBFZZ					PLATE,INSTRUCTION 13219E1040 97403		EA	1
21A	23	XAFZZ	XAFZZ	XAFZZ					CHASSIS,REGULATOR 13219E0889 97403		EA	1
21A		PAFZZ	PAFZZ	PAFZZ				5305-00-984-6191	SCREW,MACHINE MS35207-243 96906		EA	4
21A		PAFZZ	PAFZZ	PAFZZ				5305-00-990-6444	SCREW,MACHINE MS35207-261 96906		EA	4
21A		PAFZZ	PAFZZ	PAFZZ				5310-00-550-0070	WASHER,LOCK MS35333-38 96906		EA	4
21A		PAFZZ	PAFZZ	PAFZZ				5310-00-576-5752	WASHER,LOCK MS35333-39 96906		EA	4
21A		PAFZZ	PAFZZ	PAFZZ				5905-00-643-5129	RESISTOR,VARIABLE M22-03-0019IFD 81349		EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
21B		XBFFF	XBFFF	XBFFF					BOARD ASSEMBLY 13219E0884 97403		EA	1
21B	1	PAFZZ	PAFZZ	PAFZZ				5325-00-610-6861	EYELET 13219E0892 97403 GS4-4 57771		EA	13
21B	2	XAFZZ	XAFZZ	XAFZZ					BOARD,TERMINAL 13219E0893 97403		EA	1
21B	3	PAFZZ	PAFZZ	PAFZZ				5962-00-600-0784	AMPLIFIER 13217E3701 97403 SG-10A 17191		EA	1
21B	4	PAFZZ	PAFZZ	PAFZZ				5910-00-158-4785	CAPACITOR M39014/02-0277 81349		EA	2
21B	5	PAFZZ	PAFZZ	PAFZZ				5910-00-940-0141	CAPACITOR M39014/02-1277 81349		EA	2
21B	6	PAFZZ	PAFZZ	PAFZZ				5961-00-421-3002	DIODE 13219E1001 97403 IN4141 13327		EA	7
21B	7	PAFZZ	PAFZZ	PAFZZ				5961-00-451-7492	DIODE 13218E5005 97403 IN5296 04713		EA	1
21B	8	PAFZZ	PAFZZ	PAFZZ				5961-00-957-6865	DIODE 13219E0897 97403 IN4002 04713		EA	1
21B	9	PAFZZ	PAFZZ	PAFZZ				5961-00-149-4501	DIODE 13219E1000 97403 IN4003 04713		EA	4
21B	10	PAFZZ	PAFZZ	PAFZZ				5940-00-082-4881	STUD,TERMINAL,MIL-T 55155/12-4,SE12XC04 81349		EA	18
21B	11	PAFZZ	PAFZZ	PAFZZ				5961-00-730-3284	TRANSISTOR 13219E1002 97403 2N2405 56684		EA	1
21B	12	PAFZZ	PAFZZ	PAFZZ				5905-00-110-0196	RESISTOR RCR20G102JM 81349		EA	1
21B	13	PAFZZ	PAFZZ	PAFZZ				5905-00-120-9152	RESISTOR RCR07G274JM 81349		EA	1
21B	14	PAFZZ	PAFZZ	PAFZZ				5905-00-105-7967	RESISTOR RCR07G474JM 81349		EA	1
21B	15	PAFZZ	PAFZZ	PAFZZ				5905-01-084-9136	RESISTOR RJ12FY504 81349		EA	1
21B	16	PAFZZ	PAFZZ	PAFZZ				5905-00-111-4753	RESISTOR RCR20G243JM 81349		EA	1
21B	17	PAFZZ	PAFZZ	PAFZZ				5905-00-111-4738	RESISTOR RCR20G152JM 81349		EA	1
21B	18	PAFZZ	PAFZZ	PAFZZ				5905-00-252-1673	RESISTOR RCR07G624JM 81349		EA	1
21B	19	PAFZZ	PAFZZ	PAFZZ				5905-00-104-8330	RESISTOR RCR20G333JM 81349		EA	1
21B	20	PAFZZ	PAFZZ	PAFZZ				5905-00-141-1168	RESISTOR RCR20G222JM 81349		EA	1
21B	21	PAFZZ	PAFZZ	PAFZZ				5905-00-141-0600	RESISTOR RCR20G822JM 81349		EA	1
21B	22	PAFZZ	PAFZZ	PAFZZ				5905-00-115-3365	RESISTOR RCR32G821JM 81349		EA	1
21B	23	PAFZZ	PAFZZ	PAFZZ				5905-00-139-4927	RESISTOR RC42GF102JM 81349		EA	1
21B	24	PAFZZ	PAFZZ	PAFZZ				5961-100-462-7165	DIODE 13217E3696 97403 1N4744 04713		EA	2
21B	25	PAFZZ	PAFZZ	PAFZZ				5961-00-905-6577	DIODE 1N3826A 81349		EA	1
21B	26	PAFZZ	PAFZZ	PAFZZ					PAD,MOUNTING 13217E3706 97403 7717-66N WHITE 13103		EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a FIG NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SOI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
21D	27	PAFZZ	PAFZZ	PAFZZ				5340-01-048-3079	CLIP M24066/2-108 81349		EA	3
21D	28	PAFZZ	PAFZZ	PAFZZ				5340-01-026-4789	CLIP M24066/2-107 81349		EA	3
21D	29	PAFZZ	PAFZZ	PAFZZ				5330-00-800-5704	RIVET MS16535-64 96906		EA	5
21D	30	PAFZZ	PAFZZ	PAFZZX				5905-00-879-3635	RESISTOR RW67V102 81349		EA	2
21D	31	PAFZZ	PAFZZ	PAFZZ				5910-00-832-5026	CAPACITOR 13219R1003 97403		EA	2
21D	32	XAFZZ	XAFZZ	XAFZZ					BOARD,WIRING 13219E0885 97403		EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
									GROUP 05 -- GENERATOR ASSEMBLY			
22	1	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: GENERATOR TO BASE MTG MS35291-111 96906	A	EA	2
22	2	PAFZZ	PAFZZ	PAGZZ				5310-00-194-1483	WASHER, LOCK: GENERATOR TO BASE MTG MS35333-44 96906	A	EA	2
22	3	PAFZL	PAFDD	PDHHD				6115-00-945-7039	GENERATOR, ALTERNATING 13211E4880 97403	A	EA	1
22	4	XBOZZ	XBOZZ	XBGZZ				5306-00-195-4735	BOLT, TOGGLE TYPE: SHROUD MTG FF-E-588 TYPE 2 CLASS 1 81348	A	EA	2
22	5	PAOZZ	PAOZZ	PAGZZ				5310-00-167-0662	WASHER, LOCK: SHROUD MTG MS35337-43 96906	A	EA	2
22	6	XBOZZ	XBOZZ	XBGZZ					SHROUD: GENERATOR HOUSING 13215E2283 97403	A	EA	1
22	7	MOOZZ	MOOZZ	AGGGG					CHANNEL, RUBBER: SHROUD MTG 13215E2285 97403	A	EA	1
									MANUFACTURE FROM:			
		PAOZZ	PAOZZ	PAGZZ				9320-00-585-2599	RUBBER, CHANNEL 13215E2285-1 97403	A	FT	V
22	8	PAOZZ	PAOZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: PROTECTIVE CAP MTG MS35206-245 96906	A	EA	2
22	9	PAOZZ	PAOZZ	PAGZZ				5310-00-559-0070	WASHER, LOCK: PROTECTIVE CAP MTG MS35333-38 96906	A	EA	2
22	10	XBOZZ	XBOZZ	XBGZZ					CAP, PROTECTIVE: GENERATOR HOUSING 13211E4788 97403	A	EA	1
22	11	PAOZZ	PAOZZ	PAGZZ				5305-00-263-5615	SCREW, DRIVE: GENERATOR PLATE MTG MS21318-21 96906	A	EA	4
22	12	XBOZZ	MDOZZ	XBHZZ					PLATE, IDENTIFICATION: GENERATOR 13211E4804 97403	A	EA	1
22	13	PAFZL	PAFDD	PAGZZ				6115-00-056-4596	HOUSING ASSEMBLY, GENERATOR 13211E4895 97403	A	EA	1
22	14	PADZZ	PAFZZ	PAGZZ				5305-00-984-6193	SCREW, MACHINE: CONNECTOR MTG MS35206-245 96906	A	EA	4
22	15	PADZZ	PAFZZ	PAGZZ				5310-00-559-0070	WASHER, LOCK: CONNECTOR MTG MS35338-38 96906	A	EA	4
22	16	PADZZ	PAFZZ	PAGZZ				5935-00-016-2477	CONNECTOR, RECEPTACLE, ELECTRICAL: GENERATOR, HOUSING 13211E4857-1 97403	A	EA	1
22	17	XBDZZ	XBFZZ	XBHZZ					HOUSING, GENERATOR 13211E4874 97403	A	EA	1
22	18	PADZZ	PAFZZ	PAGZZ					SETSCREW, GENERATOR HOUSING MS51107-B5 96906	A	EA	1
22	19	XAOZZ	XAOZZ	XAOZZ					STATOR, EXCITER 13211E4868 97403	A	EA	1
22	20	XAOZZ	XAOZZ	XAOZZ					STATOR, GENERATOR 13211E4866 97403	A	EA	1
23	1	PAOZZ	PAOZZ	PAGZZ				5305-00-993-1848	SCREW, MACHINE: FRONT COVER MTG MS35207-265 96906	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
23	2	PAOZZ	PAOZZ	PAGZZ				5310-00-576-5752	WASHER, LOCK: FRONT COVER MTG MS35333-39 96906	A	EA	1
23	3	XBOZZ	XBOZZ	XBGZZ					COVER, FRONT 13211E4929 97403	A	EA	1
23	4	PAFZZ	PAFZZ	PAGZZ					BOLT, MACHINE: FAN HOUSING TO ENGINE MTG MS35291-36 96906	A	EA	6
23	5	PAFZZ	PAFZZ	PAGZZ				5310-00-167-0721	WASHER, LOCK: FAN HOUSING TO ENGINE MTG MS35333-41 96906	A	EA	6
23	6	PAFZZ	PAFZZ	PAGZZ				5306-00-226-4827	BOLT, MACHINE: BEARING HOUSING MTG MS90726-34 96906	A	EA	4
23	7	PAFZZ	PAFZZ	PAGZZ				5310-00-167-0721	WASHER, LOCK: HOUSING TO GENERATOR MS35333-41 96906	A	EA	4
23	8	PAFZZ	PAFZZ	PAGZZ					SETSCREW: COUPLING TO SHAFT MS51017-82 96906	A	EA	2
23	9	MFFZZ	MFFZZ	AGGGG					WIRE, LOCK: COUPLING BOLTS NPN 19099 MANUFACTURE FROM:	A	EA	1
		PAFZZ	PAFZZ	PAGZZ				9505-00-592-4690	WIRE, STEEL MS20995F32 96906	A	FT	V
23	10	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: COUPLING MTG MS51095-335 96906	A	EA	4
23	11	PAFZZ	PAFZZ	PAGZZ				5310-00-167-0721	WASHER, LOCK: COUPLING MTG MS35333-41 96906	A	EA	4
23	12	PAFZZ	PAFZZ	PAGZZ				6115-00-930-8922	COUPLING, SHAFT, FLEXIBLE: GENERATOR DRIVE 13211E4900 97403	A	EA	1
23	13	PAFZZ	PAFZZ	PAGZZ				5315-00-816-6777	KEY, MACHINE, COUPLING TO SHAFT MS20066-233 96906	A	EA	1
23	14	PAFZZ	PAFZZ	PAGZZ				5310-00-480-5663	NUT, PLAIN, ROUND: FAN MTG MS19067A07 96906	A	EA	1
23	15	XBFZZ	XBFZZ	XBGZZ				5310-00-926-5792	WASHER, KEY: FAN MTG MS19068A07 96906	A	EA	1
23	16	PAFZZ	PAFZZ	PAGZZ				6115-00-402-2080	FAN, ELECTRIC ROTATING EQUIPMENT 13211E4782 97403	A	EA	1
23	17	PAFZZ	PAFZZ	PAGZZ				5315-00-256-4795	KEY, MACHINE: FAN MTG MS20066-254 96906	A	EA	1
23	18	PAHZZ	PAFZZ	PAGZZ				5306-00-726-4835	BOLT, MACHINE: BEARING RETAINER PLATE MTG MS90728-42 96906	A	EA	2
23	19	PAHZZ	PAFZZ	PAGZZ				5310-00-167-0721	WASHER, LOCK: BEARING RETAINER PLATE MTG MS35333-41 96906	A	EA	2
23	20	XBHZZ	XBFZZ	XBGZZ					PLATE, RETAINER, BEARING: DRIVE END 13211E4781 97403	A	EA	1
23	21	PAHZZ	PAFZZ	PAGZZ				3110-00-227-2652	BEARING, BALL: ANNULAR: DRIVE END 13212E9783-2 97403	A	EA	1
23	22	XBHZZ	XBFZZ	XBGZZ					NUT, PLAIN, ROUND: BEARING RETAINING MS19067A06 96906	A	EA	1
23	23	XBHZZ	XBFZZ	XBGZZ					WASHER, KEY: BEARING NUT MS19068A06 96906	A	EA	1
23	24	PAHZZ	PAFZZ	PAGZZ				3110-00-141-9558	BEARING, BALL, ANNULAR: COMMUTATOR END 13212E9783-1 97403	A	EA	1
23	25	XAOZZ	XAOZZ	XAOZZ					ROTOR, GENERATOR 13211E4800 97403	A	EA	1
23	26	XBHZZ	XBFZZ	XBHZZ					RING, RETAINING: HUB MS18624-150 96906	A	EA	1
23	27	PAHZZ	AFFFF	PAHZZ				6115-00-056-4634	RECTIFIER, ROTATING: GENERATOR EXCITATION 13211E4859 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
23	28	PAHZZ	PAFZZ	PAHZZ				5310-00-838-6537	NUT, PLAIN, HEXAGON: RECTIFIER ASSEMBLY MS35650-105 96906	A	EA	4
23	29	PAHZZ	PAFZZ	PAHZZ				5310-00-261-8278	WASHER, LOCK: RECTIFIER ASSEMBLY MS35338-100 96906	A	EA	4
23	30	PAFZZ	PAFZZ	PAHZZ					WASHER, FLAT: RECTIFIER ASSEMBLY MS15795-808 96906	A	EA	6
23	31	MHHZZ	MFFZZ	AGGGG					LEAD, ELECTRICAL: RECTIFIER ASSEMBLY 13211E4869-6 97403	A	EA	4
									MANUFACTURE FROM:			
		PAHZZ	PAFZZ	PAGZZ				6145-00-477-0408	WIRE, ELECTRICAL MILW16878-7 TYPE F 16 AWG 81349	A	FT	V
23	32	PAHZZ	PAFZZ	PAGZZ					INSULATION SLEEVING, ELECTRICAL MILI3190CL130-TYBCATA-106 ID 81349	A	FT	V
23	33	PAHZZ	PAFZZ	PAGZZ					INSULATION SLEEVING, ELECTRICAL MILI3190CL130-TYBCATA-186 ID 81349	A	FT	V
23	34	PAFZZ	PAFZZ	PAGZZ					SEMICONDUCTOR DEVICE: RECTIFIER 13211E4869-3 97403	A	EA	3
23	35	PAFZZ	PAFZZ	PAGZZ					SEMICONDUCTOR DEVICE: RECTIFIER 13211E4869-4 97403	A	EA	3
23	36	PAHZZ	PAFZZ	PAGZZ				5320-00-242-0322	RIVET, TUBULAR: HEATSINK TO HUB MS16535-164 96906	A	EA	6
23	37	XBHZZ	XBFZZ	XBGZZ					HEATSINK, ELECTRICAL 13213E3925 97403	A	EA	2
23	38	XBHZZ	XBFZZ	XBGZZ					HUB, RECTIFIER 13213E3926 97403	A	EA	1
23	39	XBHZZ	XBFZZ	XBGZZ					TERMINAL, STUD MS17172-3 96906	A	EA	3
23	40	XA---	XA---	XA---					HUB 13213E3926-1 97403	A	EA	1
23	41	PAHZZ	PAFZZ	PAGZZ				5315-00-990-2630	KEY, MACHINE: RECTIFIER MTG MS20066-252 96906	A	EA	1
23	42	XAOZZ	XAOZZ	XAOZZ					ROTOR, EXCITER 13211E4784 97403	A	EA	1
23	43	PADZZ	PAFZZ	PAGZZ				5315-00-258-4794	KEY, MACHINE, EXCITER ROTOR TO SHAFT MS20066-256 96906	A	EA	1
23	44	PAFZL	PAFDD	PBHHH				6115-00-940-7859	ROTOR ASSEMBLY, GENERATOR 13211E4894 97403	A	EA	1
23	45	PADZZ	PAFZZ	PAGZZ				5315-00-936-6248	KEY, MACHINE: GENERATOR ROTOR TO SHAFT MS20066-264 96906	A	EA	1
23	46	XAOZZ	XAOZZ	XAOZZ					SHAFT, SHOULDERED: ROTOR 13211E4787 97403	A	EA	1
23	47	XBFZZ	XBFZZ	XBGZZ					HOUSING, BEARING UNIT 13211E4879 97403	A	EA	1
23	48	XBDZZ	XBFZZ	XBGZZ					BUSHING, HOUSING 13211E4879-2 97403	A	EA	1
23	49	XAOZZ	XBFZZ	XBGZZ					HOUSING 13211E4879-1 97403	A	EA	1
24	1	PAFZZ	PAFZZ	PAGZZ				5305-00-984-6193	SCREW, CAP, HEXAGON: GENERATOR MTG MS35206-245 96906	B	EA	2
24	2	PAFZZ	PAFZZ	PAGZZ				5310-00-045-3299	WASHER, LOCK: GENERATOR MTG MS35338-42 96906	B	EA	2
24	3	PAFZL	PAFDD	PDHHD				6115-00-938-5878	GENERATOR ASSEMBLY 13216E2000 97403	B	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	SSI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
24	4	PAFZZ	PAFZZ	PAGZZ				5306-00-225-8503	SCREW, HEXAGON HEAD: GRILLE MTG MS90725-39 96906	B	EA	6
24	5	PAFZZ	PAFZZ	PAGZZ				5310-00-407-9566	WASHER, LOCK: GRILLE MTG MS35338-45 96906	B	EA	6
24	6	PAFZZ	PAFZZ	PAGZZ				6115-00-997-4466	GRILLE, AIR INLET: GENERATOR 134D1820 44940	B	EA	1
24	7	PAFZZ	PAFZZ	PAGZZ				5306-00-225-8498	SCREW, HEXAGON HEAD: DRIVE DISC TO ADAPTER MTG MS90725-33 96906	B	EA	8
24	8	PAFZZ	PAFZZ	PAGZZ				5310-00-016-7922	WASHER, LOCK, TANGED: ADAPTER MTG 13211E6855 97403	B	EA	8
24	9	PAFZZ	PAFZZ	PAGZZ				5306-00-225-9081	SCREW, HEXAGON HEAD: ADAPTER TO FLYWHEEL MTG MS90725-36 96906	B	EA	4
24	10	PAFZZ	PAFZZ	PAGZZ				5310-00-016-7922	WASHER, LOCK, TANGED ADAPTER TO FLYWHEEL MTG 13211E6855 97403	B	EA	4
24	11	XBFZZ	XBFZZ	XBGZZ					ADAPTER, DRIVE DISC: ENGINE TO FLYWHEEL MTG 13211E6853 97403	B	EA	1
24	12	PAFZZ	PAFZZ	PAGZZ				5305-00-071-2238	SCREW, CAP, HEXAGON: STATOR TO HOUSING MS90725-13 96906	B	EA	8
24	13	PAFZZ	PAFZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: STATOR TO HOUSING MS35338-44 96906	B	EA	8
24	14	PAFZZ	PAFZZ	PAGZZ				5305-00-989-7434	SCREW, CAP, HEXAGON: EXCITER FRAME TO HOUSING MS35207-263 96906	B	EA	8
24	15	PAFZZ	PAFZZ	PAGZZ				5310-00-045-3296	WASHER, LOCK: HOUSING TO EXCITER FRAME MS35338-43 96906	B	EA	8
24	16	PAFZZ	PAFZZ	PAGZZ				5306-00-225-8503	SCREW, HEXAGON HEAD: GENERATOR FAN MTG MS90725-39 96906	B	EA	1
24	17	PAFZZ	PAFZZ	PAGZZ				5310-00-407-9566	WASHER, LOCK: GENERATOR FAN MTG MS35338-45 96906	B	EA	1
24	18	PAFZZ	PAFZZ	PAGZZ					WASHER, FLAT: FAN MTG 13211E6854 97403	B	EA	1
24	19	PAFZZ	PAFZZ	PAGZZ				6130-00-930-2539	FAN: GENERATOR COOLING 13211E6851 97403	B	EA	1
24	20	XAOZZ	XAOZZ	XAOZZ					HUB, FAN: GENERATOR 332A1634 44940	B	EA	1
24	21	PAFZZ	PAFZZ	PAGZZ				5315-00-616-5514	KEY, WOODRUFF: FAN MTG MS35756-6 96906	B	EA	1
24	22	PAFZZ	PAFZZ	PAGZZ				3110-00-585-3296	BEARING: ROTOR SHAFT 13211E6807 97403	B	EA	1
24	23	PAFZZ	PAFZZ	PAGZZ				5340-00-359-5269	CLIP, BEARING: BEARING RETAINING 13214E0209 97403	B	EA	1
24	24	PAFZL	PAFDD	PBHHH				6115-00-938-9677	ROTOR ASSEMBLY: GENERATOR 13216E2020 97403	B	EA	1
24	25	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON: DRIVE DISC TO ROTOR MTG MS35297-6 96906	B	EA	8
24	26	XAOZZ	XBFZZ	XBGZZ					PLATE, LOCK: DRIVE DISC TO ROTOR 13211E6856 97403	B	EA	4
24	27	XAOZZ	XBFZZ	XBGZZ					RING, SUPPORT 13216E2019 97403	B	EA	1
24	28	PAFZZ	PAFZZ	PAGZZ				6115-00-066-2437	DISC, DRIVE: GENERATOR 13211E6028 97403	B	EA	1
24	29	PAFZZ	PAFZZ	PAGZZ				5305-00-018-0034	SCREW, CAP, HEXAGON: EXCITER ROTOR MTG MS35297-12 96906	B	EA	4

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SOI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
24	30	PAPSS	PAPSS	PAOSS				5310-00-849-3296	WASHER, LOCK: EXCITER ROTOR TO GENERATOR ROTOR MTG MS35338-43 96906	B	EA	4
24	31	PAPSS	PAPSS	PAOSS					SCREW, MACHINE: EXCITER ROTOR LEAD TO GENERATOR ROTOR MTG 13211E6864 97403	B	EA	1
24	32	XAOSS	XAOSS	XAOSS					ROTOR, WOUND: EXCITER 13211E6802 97403	B	EA	1
24	33	PAPSS	PAPSS	PAOSS				5961-00-225-9123	RECTIFIER: ROTOR EXCITER 13211E6808 97403	B	EA	3
24	34	XAOSS	XAOSS	XAOSS					ROTOR, WOUND: ALTERNATOR 13216E2010 97403	B	EA	1
24	35	PAPSS	PAPSS	PAOSS				5940-00-204-0966	TERMINAL, LUG: LEAD, EXCITER TO GENERATOR ROTOR MS25036-2 96906	B	EA	1
24	36	XAOSS	XBPSS	XBPSS					KEY 13216E2015 97403	B	EA	1
24	37	PAPSL	PAPDD	PAOSS				6115-00-936-8134	HOUSING ASSEMBLY: GENERATOR 13216E2010 97403	B	EA	1
24	38	XAOSS	XBPSS	XBOSS					FRAME ASSEMBLY, EXCITER 13211E6831 97403	B	EA	1
24	39	PAPSS	PAPSS	PAOSS				5305-00-984-6191	SCREW, MACHINE: CLIP MTG MS35206-243 96906	B	EA	1
24	40	PAPSS	PAPSS	PAOSS				5310-00-559-0070	WASHER, LOCK: CLIP MTG MS35338-38 96906	B	EA	1
24	41	XBPSS	XBPSS	XBOSS					CLIP, WIRE 13211E6839 97403	B	EA	1
24	42	XAOSS	XAOSS	XAOSS					SHELL, FEED THROUGH 10-37090-363 77820	B	EA	1
24	43	XAOSS	XAOSS	XAOSS					STATOR, WOUND 13216E2005 97403	B	EA	1
24	44	XAOSS	XAOSS	XAOSS					HOUSING, GENERATOR 13216E2009 97403	B	EA	1
24	45	PAOSS	PAOSS	PAOSS				5305-00-175-3236	SCREW, DRIVE, ROUND HEAD: PLATE MTG MS21318-14 96906	B	EA	4
24	46	XBOSS	MDOSS	XBOSS					PLATE, IDENTIFICATION: GENERATOR 13216E2001 97403	B	EA	1
									GROUP 06 - FRAME ASSEMBLY			
25	1	PAOSS	PAOSS	PAOSS					SCREW, CAP, SOCKET HEAD: BRACKET MS16997-142 96906	A	EA	1
25	2	PAOSS	PAOSS	PAOSS				5310-00-194-1483	WASHER, LOCK: BRACKET MS35333-44 96906	A	EA	1
25	3	PAOSS	PAOSS	PAOSS				5305-00-983-6626	SCREW, CAP, SOCKET HEAD: BRACKET MS16997-83 96906	A	EA	2
25	4	PAOSS	PAOSS	PAOSS				5310-00-167-0721	WASHER, LOCK: BRACKET MS35333-41 96906	A	EA	2
25	5	XBOSS	XBOSS	XBOSS					BRACKET, LIFTING EYE 13211E4801 97403	A	EA	1
25	6	XBOSS	XBOSS	XBOSS				5340-00-854-6730	CLAMP, LOOP: BAFFLE MS21333-124 96906	A	EA	1
25	7	XBOSS	XBOSS	XBOSS					BAFFLE, AIR: LH 13211E4802 97403	A	EA	1
25	8	XBOSS	XBOSS	XBOSS					BAFFLE, AIR: RH 13211E4801 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
25	9	XBOZZ	XBOZZ	XBOZZ					GROMMET, PLASTIC: BAFFLE MS21266-3N 96906	A	EA	1
25	10	PAFZZ	PAFZZ	PAGZZ				5310-00-595-7421	NUT, SELF-LOCKING, HEXAGON: ENGINE TO BRACKET MS17829-8C 96906	A	EA	1
25	11	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: ENGINE TO BRACKET MS35291-113 96906	A	EA	1
25	12	PAFZZ	PAFZZ	PAGZZ				5310-00-809-5998	WASHER, FLAT: ENGINE TO BRACKET MS27183-18 96906	A	EA	1
25	13	PAFZZ	PAFZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: ENGINE BRACKET MS35291-60 96906	A	EA	3
25	14	XBFZZ	XBFZZ	XBGZZ					BRACKET, ENGINE MOUNTING 13211E4817 97403	A	EA	1
25	15	XBOZZ	XBOZZ	XBOZZ					BOLT, EYE: GENERATOR LIFTING 13211E4803 97403	A	EA	2
25	16	PAOZZ	PAOZZ	PAOZZ				5310-00-550-1130	WASHER, LOCK: EYE BOLT MTG MS35333-40 96906	A	EA	2
25	17	PAOZZ	PAOZZ	PAOZZ					SCREW, CAP, HEXAGON HEAD: TOOL BOX MTG MS35291-6 96906	A	EA	2
25	18	PAOZZ	PAOZZ	PAOZZ				5310-00-550-1130	WASHER, LOCK: TOOL BOX MTG MS35333-40 96906	A	EA	2
25	19	XBOZZ	XBOZZ	XBOZZ					BOX, TOOL 13211E4903 97403	A	EA	1
25	20	XA---	XA---	XA---					LATCH ASSEMBLY: LID HOLDDOWN 13200E6140 97403	A	EA	1
25	21	PAOZZ	PAOZZ	XBOZZ				5320-00-879-6610	RIVET, TUBULAR: LATCH ASSEMBLY MTG MS16535-135 96906	A	EA	4
25	22	XAOZZ	XAOZZ	XAOZZ					CATCH 13200E6140-1 97403	A	EA	1
25	23	XAOZZ	XAOZZ	XAOZZ					STRIKE 13200E6140-2 97403	A	EA	1
25	24	PAOZZ	PAOZZ	PAOZZ				5305-00-175-3230	SCREW, DRIVE: TOOL BOX PLATE MS21318-14 96906	A	EA	4
25	25	PAOZZ	PAOZZ	XBOZZ				9905-00-450-9121	NAMEPLATE: GENERATOR SET, IDENTIFICATION 13211E4815 97403 73-0506-12 30554	A	EA	1
26	1	PAOZZ	PAOZZ	PAOZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: TOOL BOX MTG MS51967-2 96906	B	EA	4
26	2	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK: TOOL BOX MTG MS35338-44 96906	B	EA	4
26	3	PAOZZ	PAOZZ	PAOZZ				5305-00-068-0501	SCREW, CAP, HEXAGON: TOOL BOX MTG MS90725-5 96906	B	EA	4
26	4	XBOZZ	XBOZZ	XBOZZ					BOX, TOOL 13211E6761 97403	B	EA	1
26	5	PAOZZ	PAOZZ	XBOZZ				5320-00-903-6767	RIVET, DRIVE: NAMEPLATE MTG MS24662-5 96906	B	EA	6
26	6	XBOZZ	MOOZZ	XBOZZ					NAMEPLATE, OPERATING INSTRUCTIONS: LID, TOOL BOX 13216E1918 97403	B	EA	1
26	7	XBOZZ	XBOZZ	XBOZZ					BOLT, EYE: GENERATOR LIFTING 13211E6765 97403	B	EA	1
26	8	PAOZZ	PAOZZ	PAOZZ				5310-00-851-2662	NUT, HEXAGON, MACHINE: EYE BOLT MTG MS35691-17 96906	B	EA	1
26	9	PAOZZ	PAOZZ	PAOZZ				5310-00-012-0614	NUT, HEXAGON, MACHINE: VIBRATION MOUNT TO BRACKET MTG MS35650-102 96906	B	EA	8

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
26	10	PAOZZ	PAOZZ	PAOZZ				5310-00-045-3296	WASHER, LOCK: MOUNT TO BRACKET MS35338-43 96906	B	EA	8
26	11	PAOZZ	PAOZZ	PAOZZ				5305-00-984-7352	SCREW, MACHINE, MOUNT TO BRACKET MS35191-278 96906	B	EA	8
26	12	PAOZZ	PAOZZ	PAOZZ				5340-00-670-1223	MOUNT, VIBRATION: CONTROL BOX TO BRACKET 13211E6702 97403	B	EA	2
26	13	PAOZZ	PAOZZ	PAOZZ				5305-00-068-0501	SCREW, CAP: CONTROL BOX TO MOUNT MS90725-5 96906	B	EA	2
26	14	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK: CONTROL BOX TO MOUNT MTG MS35338-44 96906	B	EA	2
26	15	PAFZZ	PAOZZ	PAOZZ				5305-00-175-3230	SCREW, DRIVE: NAMEPLATE MTG MS21318-14 96906	B	EA	4
26	16	PAOZZ	MDOZZ	XBOZZ					NAMEPLATE: GENERATOR SET, IDENTIFICATION 73-0506-1 or 73-0506-13 30554	B	EA	1
26	17	PAOZZ	PAOZZ	PAOZZ				5306-00-225-8497	SCREW, CAP, HEXAGON: BRACKET MTG MS90725-32 96906	B	EA	5
26	18	PAOZZ	PAOZZ	PAOZZ				5310-00-407-9566	WASHER, LOCK: BRACKET MTG MS35338-45 96906	B	EA	5
26	19	XBOZZ	XBOZZ	XBOZZ					BRACKET, TOOL BOX 13216E1915 97403	B	EA	1
27	1	PAOZZ	PAOZZ	PAOZZ				5935-00-258-9156	CONNECTOR, PLUG, ELECTRICAL: SLAVE EQUIPMENT 7728882 18876	A	EA	1
27	2	PAOZZ	PAOZZ	PAOZZ				5310-00-483-8792	NUT, SELF-LOCKING, HEXAGON: CONNECTOR MTG MS17829-4C 96906	A	EA	4
27	3	PAOZZ	PAOZZ	PAOZZ					SCREW, CAP, HEXAGON HEAD: CONNECTOR MTG MS35291-8 96906	A	EA	4
27	4	PAOZZ	AFFFF	AGGGG				6150-00-016-2361	CABLE ASSEMBLY, AUXILIARY BATTERY 13211E4912 97403	A	EA	1
27	5	MOOZZ	MFFZZ	AGGGG					LEAD, ELECTRICAL: NEGATIVE NPN 19099	A	EA	1
									MANUFACTURE FROM:			
		PAOZZ	PAFZZ	PAGZZ				6145-00-174-1103	WIRE, ELECTRICAL NPN 19099	A	FT	V
27	6	MOOZZ	MFFZZ	AGGGG					LEAD, ELECTRICAL: POSITIVE NPN 19099	A	EA	1
									MANUFACTURE FROM:			
		PAOZZ	PAFZZ	PAGZZ				6145-00-174-1103	WIRE, ELECTRICAL NPN 19099	A	FT	V
27	7	PAOZZ	PAFZZ	PAGZZ				5940-00-557-4340	TERMINAL, LUG MS25036-27 96906	A	EA	2
27	8	MOOZZ	MFFZZ	AGGGG					INSULATION, SLEEVE: CABLE NPN 19099	A	EA	1
									MANUFACTURE FROM:			
		PAOZZ	PAFZZ	PAGZZ				5970-00-250-3028	INSULATION SLEEVING, ELECTRICAL, PLASTIC MIL-I-3190 81349	A	FT	V
27	9	PAOZZ	PAFZZ	PAGZZ					CONNECTOR, RECEPTACLE, ELECTRICAL 13211E6705 97403	A	EA	1
27	10	PAOZZ	PAOZZ	PAOZZ				5305-00-253-5615	SCREW, DRIVE: BATTERY CHARGING RECEPTACLE PLATE MTG MS21318-21 96906	A	EA	2
27	11	XBOZZ	MDOZZ	XBOZZ					PLATE, IDENTIFICATION: BATTERY CHARGING RECEPTACLE 13211E4806 97403	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
27	12	PAOZZ	PAOZZ	PAOZZ				5310-00-483-8792	NUT, SELF-LOCKING: BRACKET MTG MS17829-4C 96906	A	EA	2
27	13	PAOZZ	PAOZZ	PAOZZ					SCREW, CAP, HEXAGON HEAD: CONNECTOR BRACKET MTG MS35291-6 96906	A	EA	2
27	14	XBOZZ	XBOZZ	XBOZZ					BRACKET, ANGLE: CONNECTOR MTG 13211E4888 97403	A	EA	1
28	1	XBOZZ	PAOZZ	XBOZZ					PLUG, SLAVE: BATTERY CHARGING 13211E6771 97403	B	EA	1
28	2	PAOZZ	PAOZZ	PAOOZ				5310-00-762-6233	NUT, HEXAGON, MACHINE: RECEPTACLE BRACKET MTG MS51967-5 96906	B	EA	2
28	3	PAOZZ	PAOZZ	PAOOZ				5310-00-407-9566	WASHER, LOCK: BRACKET MTG MS35338-45 96906	B	EA	2
28	4	PAOZZ	PAOZZ	PAOOZ				5306-00-018-0078	BOLT, MACHINE: RECEPTACLE BRACKET MTG MS35297-33 96906	B	EA	2
28	5	PBOZZ	AOOOO	AGGGG					RECEPTACLE ASSEMBLY: BATTERY CHARGING 13216E1906 97403	B	EA	1
28	6	PAOZZ	PAOZZ	PAGZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: RECEPTACLE TO BRACKET MTG MS51967-2 96906	B	EA	4
28	7	PAOZZ	PAOZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: RECEPTACLE TO BRACKET MTG MS35338-44 96906	B	EA	4
28	8	PAOZZ	PAOZZ	PAGZZ				5305-00-225-3839	SCREW, CAP, HEXAGON HEAD: RECEPTACLE TO BRACKET MTG MS90725-8 96906	B	EA	4
28	9	XBOZZ	XBOZZ	XBOZZ					BRACKET, CONNECTOR 13216E1909 44940	B	EA	1
28	10	MOOZZ	AOOZZ	AGGGG					LEAD ASSEMBLY: GROUND 336A1423 44940	B	EA	1
									MANUFACTURE FROM:			
28		PAOZZ	PAOZZ	PAGZZ				5940-00-401-9856	TERMINAL MS25036-127 96906	B	EA	1
28		PAOZZ	PAOZZ	PAGZZ				6145-00-578-6606	WIRE, ELECTRICAL MS5086-2-2-9 81349	B	EA	1
28	11	MOOZZ	AOOZZ	AGGGG					LEAD ASSEMBLY: POSITIVE 336A1675 44940	B	EA	1
									MANUFACTURE FROM:			
28		PAOZZ	PAOZZ	PAGZZ				5940-00-401-9856	TERMINAL MS25036-127 96906	B	EA	1
28		PAOZZ	PAOZZ	PAGZZ				6145-00-578-6606	WIRE, ELECTRICAL MS5086-2-2-9 81349	B	FT	V
28	12	XBOZZ	XBOZZ	XBGZZ					RECEPTACLE 13211E6705 97403	B	EA	1
29	1	PAOZZ	PAOZZ	PAGZZ				5310-00-595-7421	NUT, PLAIN, HEXAGON: GUARD FRAME MTG MS17829-8C 96906	A	EA	4
29	2	XBOZZ	XBOZZ	XBGZZ					FRAME, GUARD 13211E4890 97403	A	EA	1
29	3	PAOZZ	PAOZZ	PAGZZ				5310-00-483-8792	NUT, SELF-LOCKING, HEXAGON: VIBRATION MOUNT MTG MS17829-4C 96906	A	EA	1
29	4	PAOZZ	PAOZZ	PAGZZ					SCREW, CAP, HEXAGON HEAD: MOUNT AND DRIP PAN MTG MS35291-12 96906	A	EA	1
29	5	PAOZZ	PAOZZ	PAGZZ				5310-00-809-4058	WASHER, FLAT: MOUNT AND DRIP PAN MTG MS27183-10 96906	A	EA	1

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5) DESCRIPTION		(6)	(7)
a. FIG. NO.	b. ITEM NO.	a. ARMY	b. AIR FORCE	c. NAVY	d. USMC	a. SSI	b. REPL FACTOR	NATIONAL STOCK NUMBER	REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
29	6	XBOZZ	PAFZZ	PAEZZ				5325-00-016-2352	MOUNT, RESILIENT: ENGINE VIBRATION ZB1030 76385	A	EA	1
29	7	PAOZZ	PAOZZ	PAGZZ				5310-00-951-7209	WASHER, FLAT: MOUNT AND DRIP PAN MTG MS27183-22 96906	A	EA	1
29	8	XBOZZ	XBOZZ	XBGZZ					PAN, DRIP, OIL 13211E4883 97403	A	EA	1
29	9	PAOZZ	PAOZZ	PAGZZ					NUT, PLAIN, HEXAGON: SERVICE CONNECTOR MTG MS35690-411 96906	A	EA	1
29	10	PAOZZ	PAOZZ	PAGZZ				5310-00-022-8834	WASHER, LOCK: SERVICE CONNECTOR MTG MS35333-108 96906	A	EA	1
29	11	PAOZZ	PAOZZ	PAGZZ				5310-00-045-5210	WASHER, FLAT: SERVICE CONNECTOR MTG MS15795-910 96096	A	EA	1
29	12	XBOZZ	XBOZZ	XBGZZ				5940-00-904-9634	CONNECTOR, SERVICE: GROUND 13208E5820-6 97403	A	EA	1
29	13	PAOZZ	PAOZZ	PAOZZ				5305-00-175-3230	SCREW, DRIVE: GROUND CONNECTOR PLATE MTG MS21319-14 96906	A	EA	2
29	14	XBOZZ	MOOZZ	XBOZZ					PLATE, IDENTIFICATION: GROUND SERVICE CONNECTION 13211E6730 97403	A	EA	1
29	15	PAOZZ	PAOZZ	PAOZZ				5310-00-595-7421	NUT, SELF-LOCKING, HEXAGON: U BOLT MTG MS17829-8C 96906	A	EA	4
29	16	PAOZZ	PAOZZ	PAOZZ				5310-00-809-5998	WASHER, FLAT: U BOLT MTG MS27183-18 96906	A	EA	4
29	17	XBOZZ	XBOZZ	XBOZZ					BOLT U: TOWING 13211E4802 97403	A	EA	2
29	18	PAOZZ	PAOZZ	PAOZZ				5305-00-889-3000	SCREW, MACHINE: FRONT HOLDER MTG MS35206-230 96906	A	EA	2
29	19	PAOZZ	PAOZZ	PAOZZ				5310-00-579-0079	WASHER, LOCK: FRONT HOLDER MTG MS35333-37 96906	A	EA	2
29	20	XBOZZ	XBOZZ	XBOZZ					HOLDER, COMPONENT: FUEL ADAPTER 13211E4889-1 97403	A	EA	1
29	21	PAOZZ	PAOZZ	PAOZZ				5305-00-984-8210	SCREW, MACHINE: REAR HOLDER MTG MS35206-263 96906	A	EA	2
29	22	PAOZZ	PAOZZ	PAOZZ				5310-00-576-5752	WASHER, LOCK: REAR HOLDER MTG MS35333-39 96906	A	EA	2
29	23	XBOZZ	XBOZZ	XBOZZ					HOLDER, COMPONENT: FUEL ADAPTER 13211E4889-2 97403	A	EA	1
29	24	PAOZZ	PAOZZ	PAOZZ				5305-00-253-5614	SCREW, DRIVE: FUEL SYSTEM PLATE MTG MS21318-20 96906	A	EA	2
29	25	XBOZZ	MOOZZ	XBOZZ					PLATE, IDENTIFICATION: FUEL SYSTEM 13211E4807 97403	A	EA	1
29	26	XBFZH	XBFFF	XBGZZ					BASE ASSEMBLY, SKID 13211E4896 97403	A	EA	1
30	1	PAOZZ	PAOZZ	PAOZZ				5306-00-018-0087	BOLT, MACHINE: LIFTING BRACKET MTG MS35297-40 96906	B	EA	4
30	2	PAOZZ	PAOZZ	PAOZZ				5310-00-407-9586	WASHER, LOCK: LIFTING BRACKET MTG MS35338-45 96906	B	EA	4
30	3	XBOZZ	XBOZZ	XBOZZ					BRACKET, LIFTING, GENERATOR 13211E6837 97403	B	EA	1
30	4	PAOZZ	PAOZZ	PAOZZ				5310-00-880-7744	NUT, HEXAGON, MACHINE: GUARD MTG MS51967-5 96906	B	EA	10
30	5	PAOZZ	PAOZZ	PAOZZ				5310-00-802-4701	WASHER, FLAT: GUARD MTG MS15795-813 96906	B	EA	2
30	6	PAOZZ	PAOZZ	PAOZZ				5306-00-225-8497	SCREW, CAP, HEXAGON: GUARD MTG MS90725-32 96906	B	EA	2

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)	(6)	(7)
a FIG. NO.	b ITEM NO.	a ARMY	b AIR FORCE	c NAVY	d USMC	a SSI	b REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
30	7	PAOZZ	PAOZZ	PAOZZ				5310-00-407-9566	WASHER, LOCK: GUARD MTG MS35338-45 96906	B	EA	10
30	8	PAOZZ	PAOZZ	PAOZZ				5306-00-616-1287	SCREW, CAP, HEXAGON: GUARD TO SKID MTG MS35297-32 96906	B	EA	8
30	9	XBOZZ	XBOZZ	XBOZZ					GUARD, FRAME 13216E1914 97403	B	EA	1
30	10	PAOZZ	PAOZZ	PAOZZ				5305-00-071-2237	SCREW, HEXAGON HEAD: COVER MTG MS90725-14 96906	B	EA	2
30	11	PAOZZ	PAOZZ	PAOZZ				5310-00-582-5965	WASHER, LOCK: COVER MTG MS35338-44 96906	B	EA	2
30	12	XBOZZ	XBOZZ	XBOZZ					COVER, FAN: GENERATOR 13211E6850 97403	B	EA	1
30	13	PAOZZ	PAOZZ	PAOZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: STUD MTG MS51967-2 96906	B	EA	1
30	14	PAOZZ	PAOZZ	PAOZZ				5310-00-017-4916	WASHER, LOCK: INTERNAL, EXTERNAL TEETH, STUD MTG MS45904-68 96906	B	EA	1
30	15	PAOZZ	PAOZZ	PAOZZ				6115-00-021-3321	STUD, GROUND 13211E6908 97403	B	EA	1
30	16	PAOZZ	PAOZZ	PAOZZ				5305-00-175-3230	SCREW, DRIVE: NAMEPLATE MTG MS21318-14 96906	B	EA	4
30	17	XBPZZ	XBPZZ	XBGZZ					NAMEPLATE, GROUND: GROUNDING CONNECTOR 13211E6730 97403	B	EA	1
30	18	XBPZZ	XBPZZ	XBGZZ					NAMEPLATE, RECEPTACLE 13211E6735 97403	B	EA	1
30	19	PAPZZ	PAPZZ	PAGZZ				5320-00-119-6754	RIVET, ALUMINUM: NAMEPLATE MTG MS20470AD2-3 96906	B	EA	4
30	20	XBPZZ	XBPZZ	XBGZZ					NAMEPLATE: FUEL SYSTEM 13216E[illegible]10 97403	B	EA	1
31	1	PAPZZ	PAPZZ	PAGZZ				5310-00-004-3099	NUT, HEXAGON, MACHINE: ENGINE MTG, 1/2-13 THD SIZE MS51967-14 96906	B	EA	1
31	2	PAPZZ	PAPZZ	PAGZZ				5310-00-584-5272	WASHER, LOCK: ENGINE MTG, 1/2 IN. SCREW SIZE MS35338-48 96906	B	EA	1
31	3	PAPZZ	PAPZZ	PAGZZ				5305-00-042-6417	SCREW, CAP, HEXAGON: ENGINE MTG, 1/2-13 THD SIZE, 1-1/2 IN. LG MS90725-113 96906	B	EA	1
31	4	PAPZZ	PAPZZ	PAGZZ				5310-00-044-6230	WASHER, FLAT: ENGINE MTG, 1/2 IN. SCREW SIZE	B	EA	1
31	5	PAPZZ	PAPZZ	PAGZZ				5310-00-732-0558	NUT, PLAIN, HEXAGON: BRACKET MTG, 3/8-16 THD SIZE MS51967-8 96906	B	EA	3
31	6	PAPZZ	PAPZZ	PAGZZ					WASHER, FLAT: BRACKET MTG 13211E6995-1 97403	B	EA	3
31	7	PAPZZ	PAPZZ	PAGZZ				5305-00-269-3214	SCREW, CAP, HEXAGON: BRACKET MTG, 3/8-16 THD SIZE, 1-1/2 IN. LG MS90725-64 96906	B	EA	3
31	8	PAPZZ	PAPZZ	PAGZZ					WASHER, FLAT: BRACKET MTG 13211E6995-1 97403	B	EA	3
31	9	XBPZZ	XBPZZ	XBGZZ					BRACKET, ENGINE 13211E6721 97403	B	EA	1
31	10	PAPZZ	PAPZZ	PAGZZ				5305-00-269-3213	SCREW, CAP, HEXAGON: GENERATOR BRACKET MTG MS90725-63 96906	B	EA	8
31	11	PAPZZ	PAPZZ	PAGZZ				5310-00-637-9541	WASHER, FLAT: GENERATOR BRACKET MTG MS35338-46 96906	B	EA	8

(1) ILLUSTRATION		(2) SMR CODE				(3) USMC		(4)	(5)		(6)	(7)
a	b	a	b	c	d	a	b					
FIG. NO.	ITEM NO.	ARMY	AIR FORCE	NAVY	USMC	SIS	REPL FACTOR	NATIONAL STOCK NUMBER	DESCRIPTION REF NUMBER & MFR CODE	USABLE ON CODE	U/M	QTY INC IN UNIT
31	12	XBPZZ	XBPZZ	XBGZZ					PLATE, RETAINER: GENERATOR BRACKET MTG 13216E1907 97403	B	EA	2
31	13	XBPZZ	XBPZZ	XBGZZ					BRACKET: GENERATOR MTG 13211E6726-2 97403	B	EA	2
31	14	XBPZZ	XBPZZ	XBGZZ					NUT WELD: GENERATOR BRACKET MTG MS21727-5 96906	B	EA	8
31	15	PAOZZ	PAOZZ	PAGZZ				5310-00-012-0614	NUT, HEXAGON, MACHINE: MOUNT TO SKID MS35650-102 96906	B	EA	8
31	16	PAOZZ	PAOZZ	PAGZZ				5310-00-045-3296	WASHER, LOCK: MOUNT TO SKID MTG MS35338-43 96906	B	EA	8
31	17	PAOZZ	PAOZZ	PAGZZ				5305-00-984-7352	SCREW, MACHINE: MOUNT TO SKID MTG MS35191-278 96906	B	EA	8
31	18	PAOZZ	PAOZZ	PAGZZ				5340-00-670-1223	MOUNT, VIBRATION: CONTROL BOX TO SKID 13211E6702 97403	B	EA	2
32	1	XBPZZ	XBPZZ	XBGZZ					BASE ASSEMBLY, SKID 13216E1902 97403	B	EA	1
32	2	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BAFFLE PLATE MTG MS90725-1 96906	B	EA	2
32	3	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BAFFLE PLATE MTG MS35338-44 96906	B	EA	2
32	4	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BAFFLE PLATE MTG MS90725-1 96906	B	EA	1
32	5	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BAFFLE PLATE MTG MS35338-44 96906	B	EA	1
32	6	XBPZZ	XBPZZ	XBGZZ					PLATE, BAFFLE, RIGHT 13216E1904 97403	B	EA	1
32	7	XBPZZ	XBPZZ	XBGZZ					NUT, WELD 13211E6716-1 97403	B	EA	2
32	8	XBPZZ	XBPZZ	XBGZZ					GROMMET, RUBBER: BAFFLE PLATE MS35490-19 96906	B	EA	1
32	9	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BAFFLE PLATE MTG MS90725-1 96906	B	EA	2
32	10	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BAFFLE PLATE MTG MS35338-44 96906	B	EA	2
32	11	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BRACKET TO BAFFLE PLATE MTG MS90725-1 96906	B	EA	1
32	12	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BRACKET TO BAFFLE PLATE MTG MS35338-44 96906	B	EA	1
32	13	XBPZZ	XBPZZ	XBGZZ					PLATE, BAFFLE, LEFT 13211E6724 44940	B	EA	1
32	14	XBPZZ	XBPZZ	XBGZZ					NUT, WELD 13211E6716-1 97403	B	EA	1
32	15	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BRACKET TO DRIP PAN MTG MS90725-1 96906	B	EA	2
32	16	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BRACKET TO DRIP PAN MTG MS35338-44 96906	B	EA	2
32	17	XBPZZ	XBPZZ	XBGZZ					BRACKET, BAFFLE PLATE 13211E6723 97403	B	EA	2
32	18	PAPZZ	PAPZZ	PAGZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: BRACKET MTG MS51967-2 96906	B	EA	1
32	19	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BRACKET MTG MS35338-44 96906	B	EA	1
32	20	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0502	SCREW, CAP, HEXAGON: BRACKET MTG MS90725-6 96906	B	EA	1

(1) ILLUSTRATION a FIG. NO.	(1) ILLUSTRATION b ITEM NO.	(2) SMR CODE a ARMY	(2) SMR CODE b AIR FORCE	(2) SMR CODE c NAVY	(2) SMR CODE d USMC	(3) USMC a SB	(3) USMC b REPL FACTOR	(4) NATIONAL STOCK NUMBER	(5) DESCRIPTION REF NUMBER & MFR CODE	(6) USABLE ON CODE	(6) U/M	(7) QTY INC IN UNIT
32	21	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0498	SCREW, CAP, HEXAGON: BRACKET MTG MS90725-1 96906	D	EA	1
32	22	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BRACKET MTG MS35338-44 96906	D	EA	1
32	23	XBPZZ	XBPZZ	XBGZZ					BRACKET, DEFLECTOR PLATE 13211E6722 44940	D	EA	1
32	24	XBPZZ	XBPZZ	XBGZZ					NUT, WELD 13211E6716-1 97403	D	EA	1
32	25	PAPZZ	PAPZZ	PAGZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: BAFFLE DEFLECTOR MTG MS51967-2 96906	D	EA	1
32	26	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: BAFFLE DEFLECTOR MTG MS35338-44 96906	D	EA	1
32	27	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0502	SCREW, CAP, HEXAGON: DEFLECTOR PLATE MTG MS90725-6 96906	D	EA	1
32	28	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0494	SCREW, CAP, HEXAGON: DEFLECTOR BAFFLE MTG MS90725-1 96906	D	EA	1
32	29	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: DEFLECTOR BAFFLE MTG MS35338-44 96906	D	EA	1
32	30	XBPZZ	XBPZZ	XBGZZ					BAFFLE, DEFLECTOR 13216E1929 97403	D	EA	1
32	31	PAPZZ	PAPZZ	PAGZZ				5310-00-761-6882	NUT, HEXAGON, MACHINE: DEFLECTOR MTG MS51967-2 96906	D	EA	6
32	32	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: DEFLECTOR MTG MS35338-44 96906	D	EA	6
32	33	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0502	SCREW, CAP, HEXAGON: DEFLECTOR PLATE MTG MS90725-6 96906	D	EA	6
32	34	PAPZZ	PAPZZ	PAGZZ				5305-00-068-0494	SCREW, CAP, HEXAGON: BAFFLE AND DEFLECTOR PLATE MTG MS90725-1 96906	D	EA	6
32	35	PAPZZ	PAPZZ	PAGZZ				5310-00-582-5965	WASHER, LOCK: DEFLECTOR PLATE AND BAFFLE MTG MS35338-44 96906	D	EA	6
32	36	XBPZZ	XBPZZ	XBGZZ					PLATE, DEFLECTOR 13216E1905 97403	D	EA	1
32	37	XBPZZ	XBPZZ	XBGZZ					NUT, WELD 13211E6716-1 97403	D	EA	7
32	38	XBPZZ	XBPZZ	XBGZZ					BASE, SKID 13216E1903 97403	D	EA	1
32	39	XBPZZ	XBPZZ	XBGZZ					NUT, WELD 13211E6716-3 97403	D	EA	1

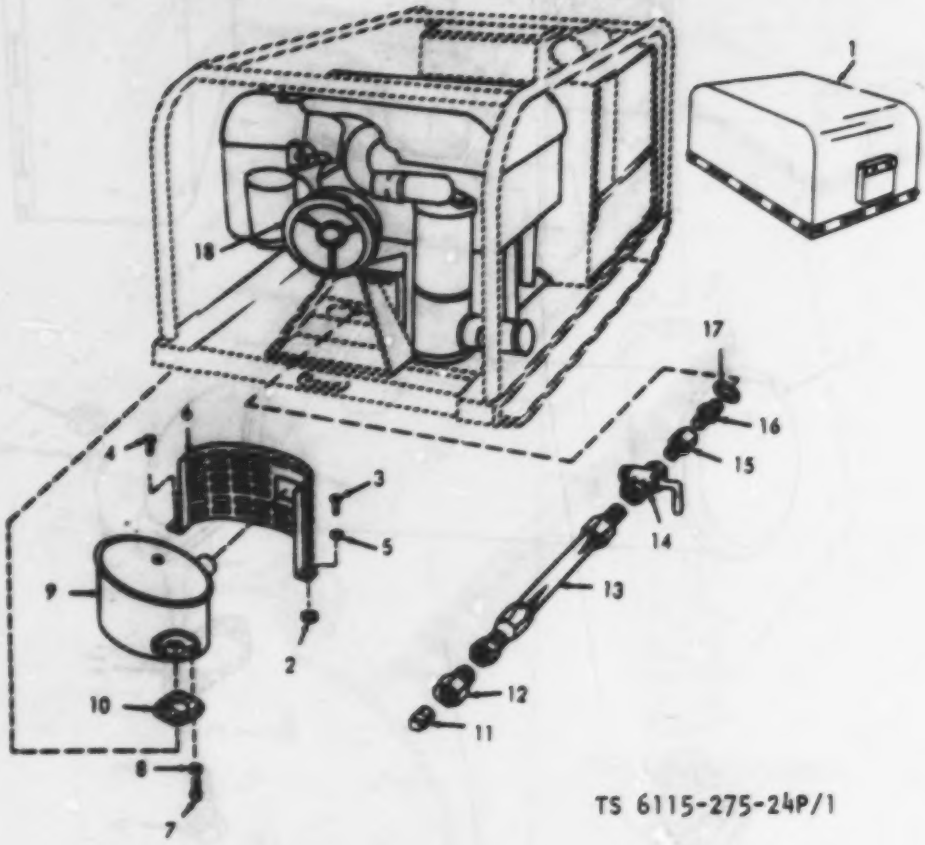

Figure 1. Muffler, oil drain and engine,(Model MEP-018A).

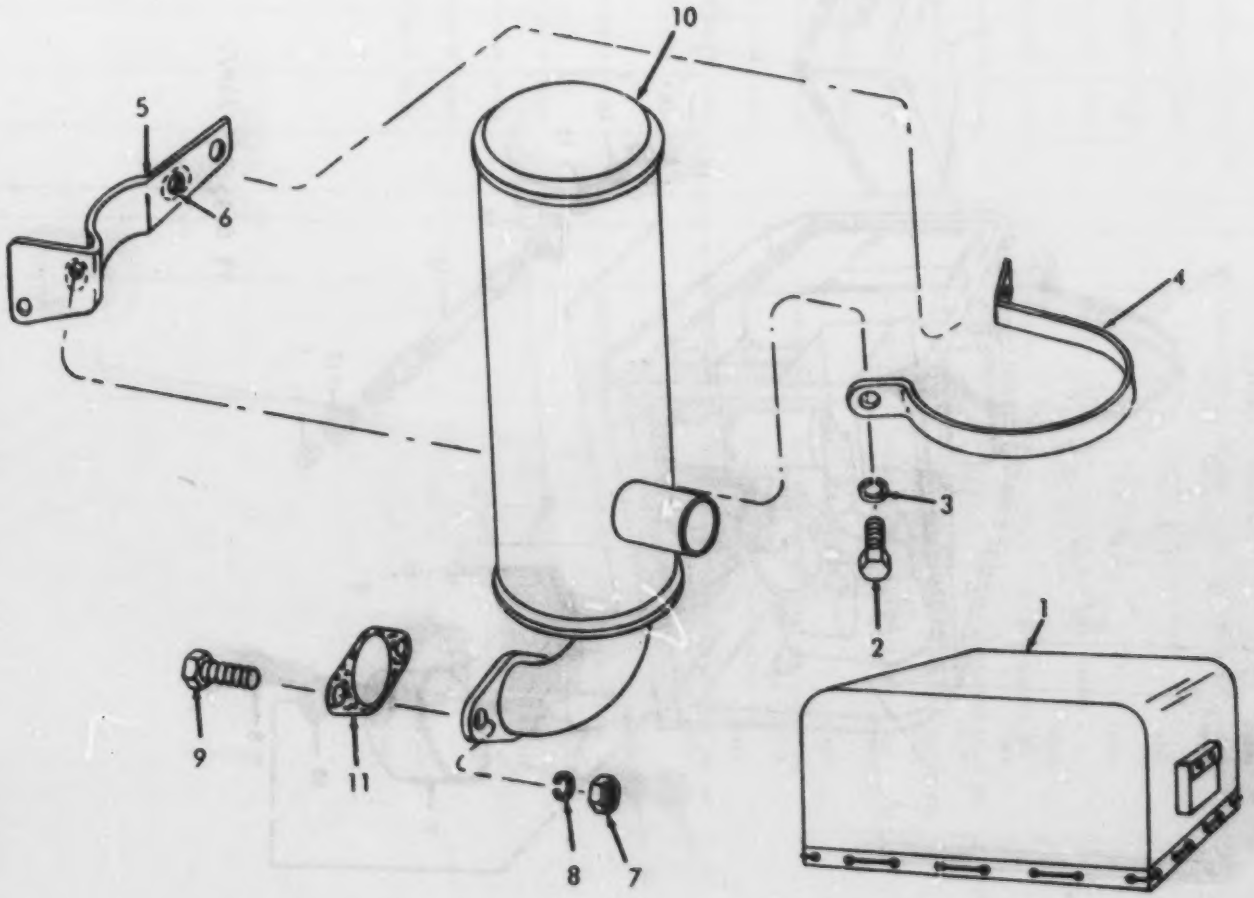

TS 6115-275-24P/2

Figure 2. Muffler, bracket and cover, (MEP-023A).

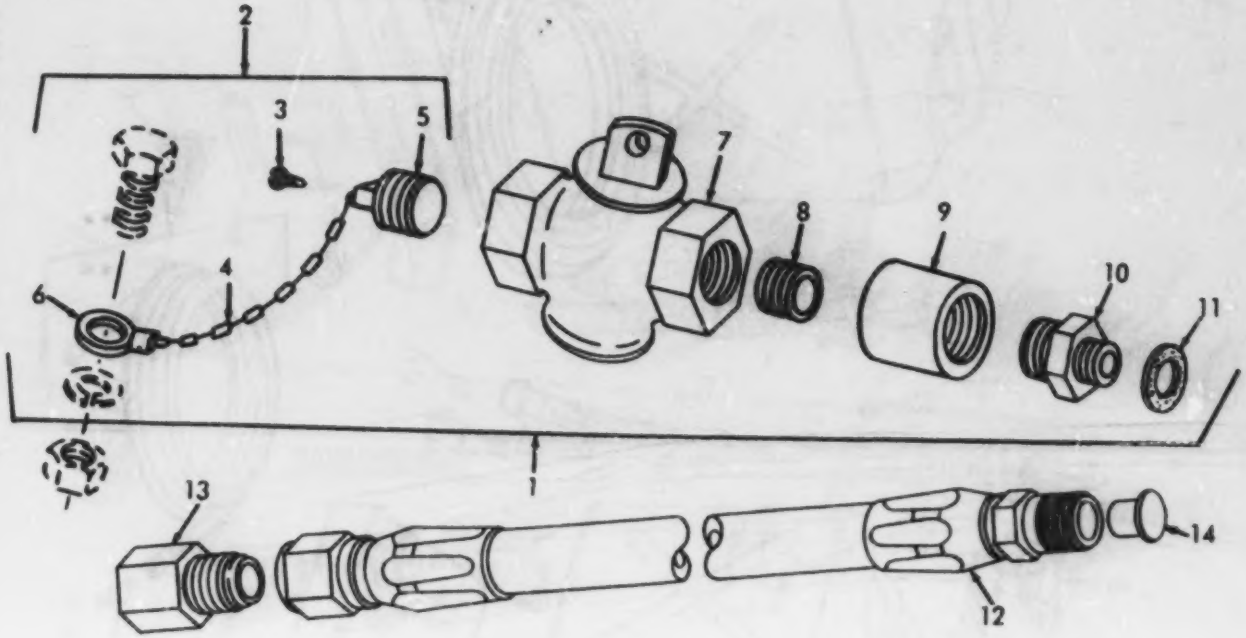

TS 6115-275-24P/3

Figure 3. Engine oil drain, (MEP-023A).

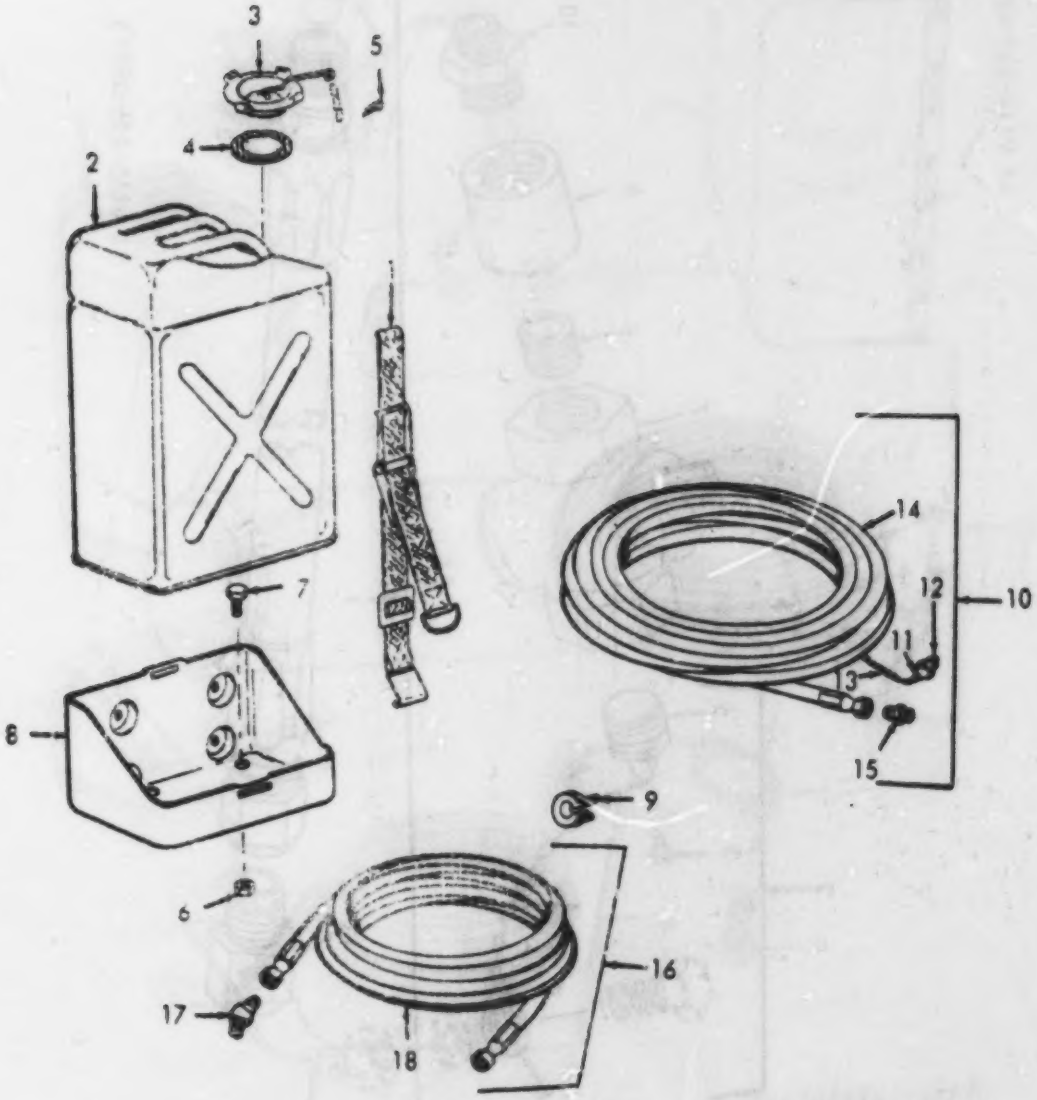

Figure 4. Fuel tank, bracket and line, (MEP-018A).

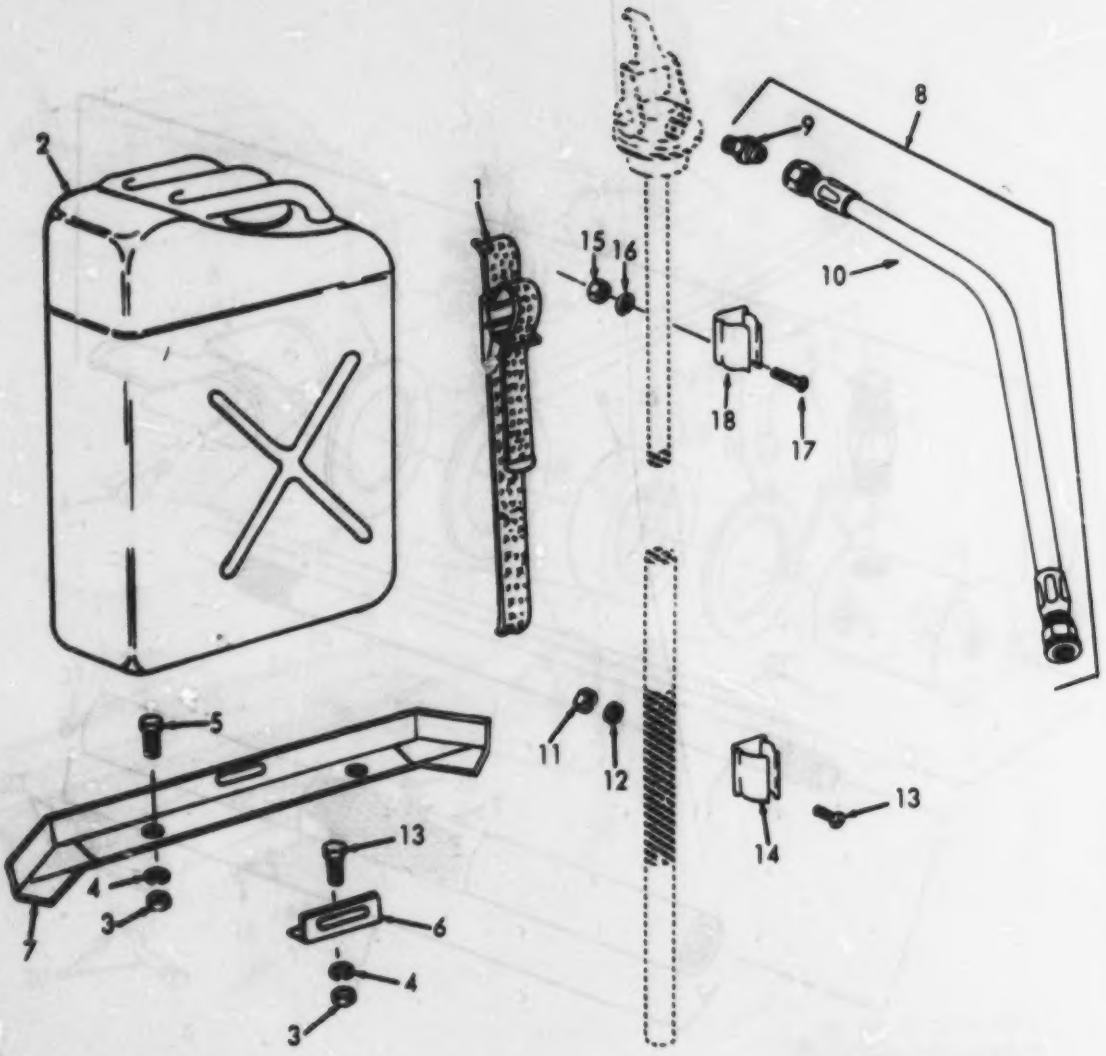

Figure 5. Fuel tank, lines and fittings, (MEP-023A).

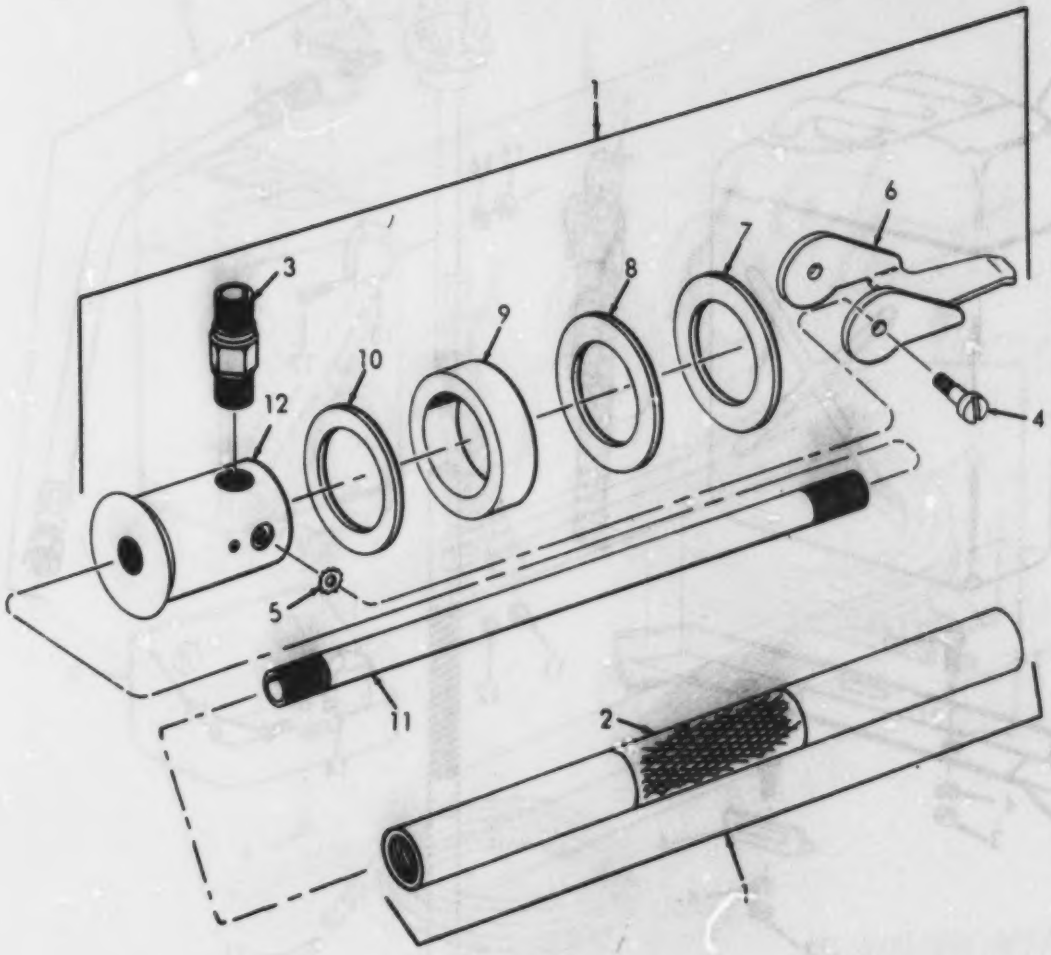

TS 6115-275-24P/6

Figure 6. Fuel tank adapter.

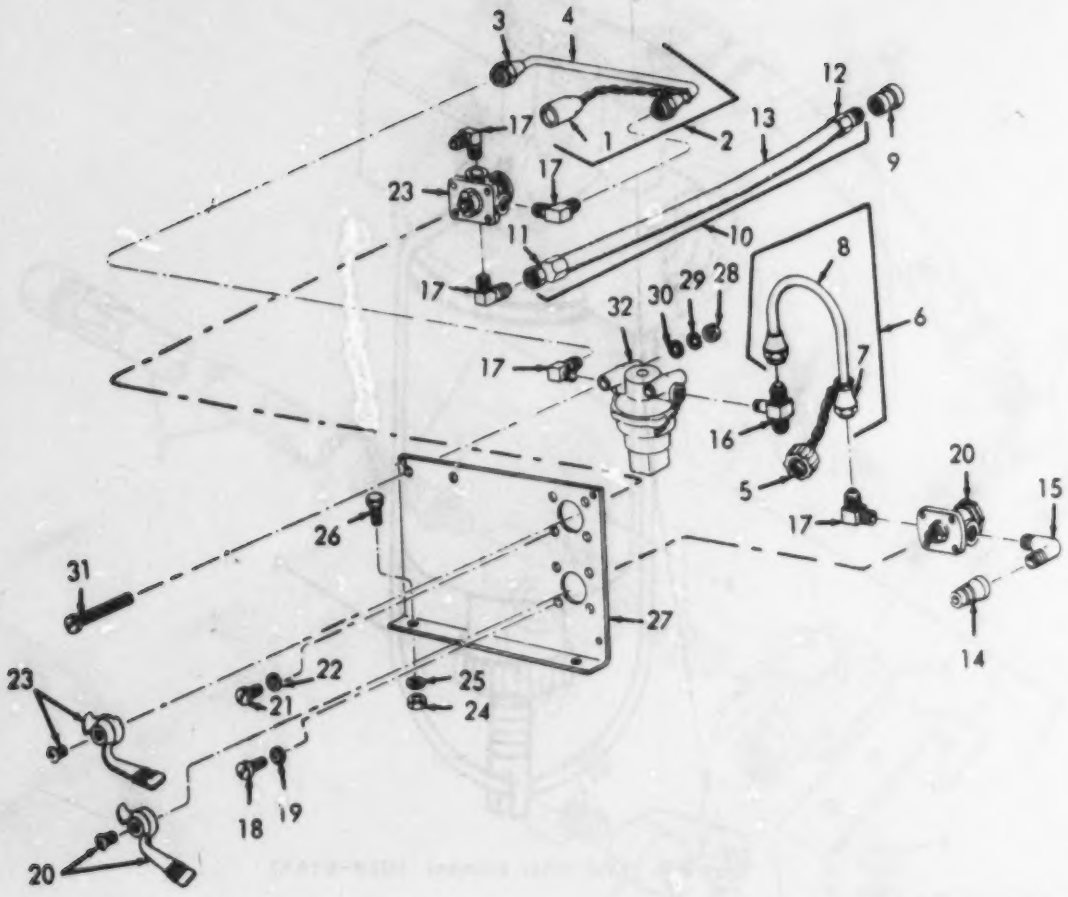

TS 6115-275-24P/7

Figure 7. Fuel valve and lines, (MEP-018A).

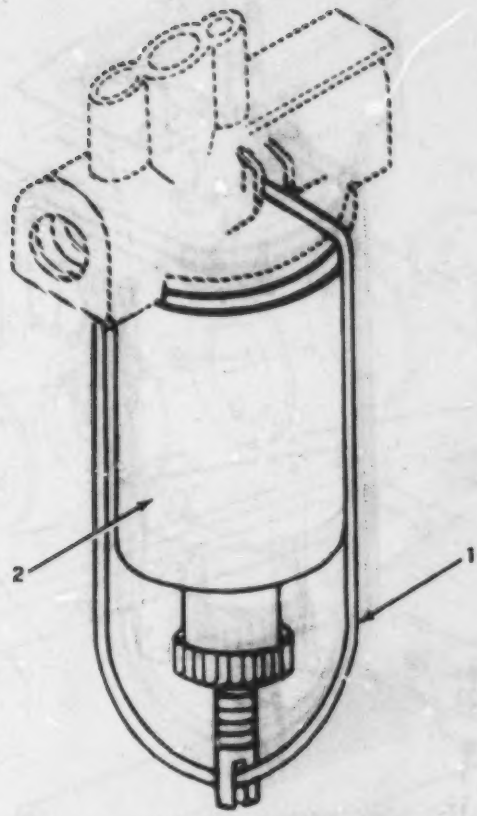

Figure 8. Fuel filter element. (MEP-018A).

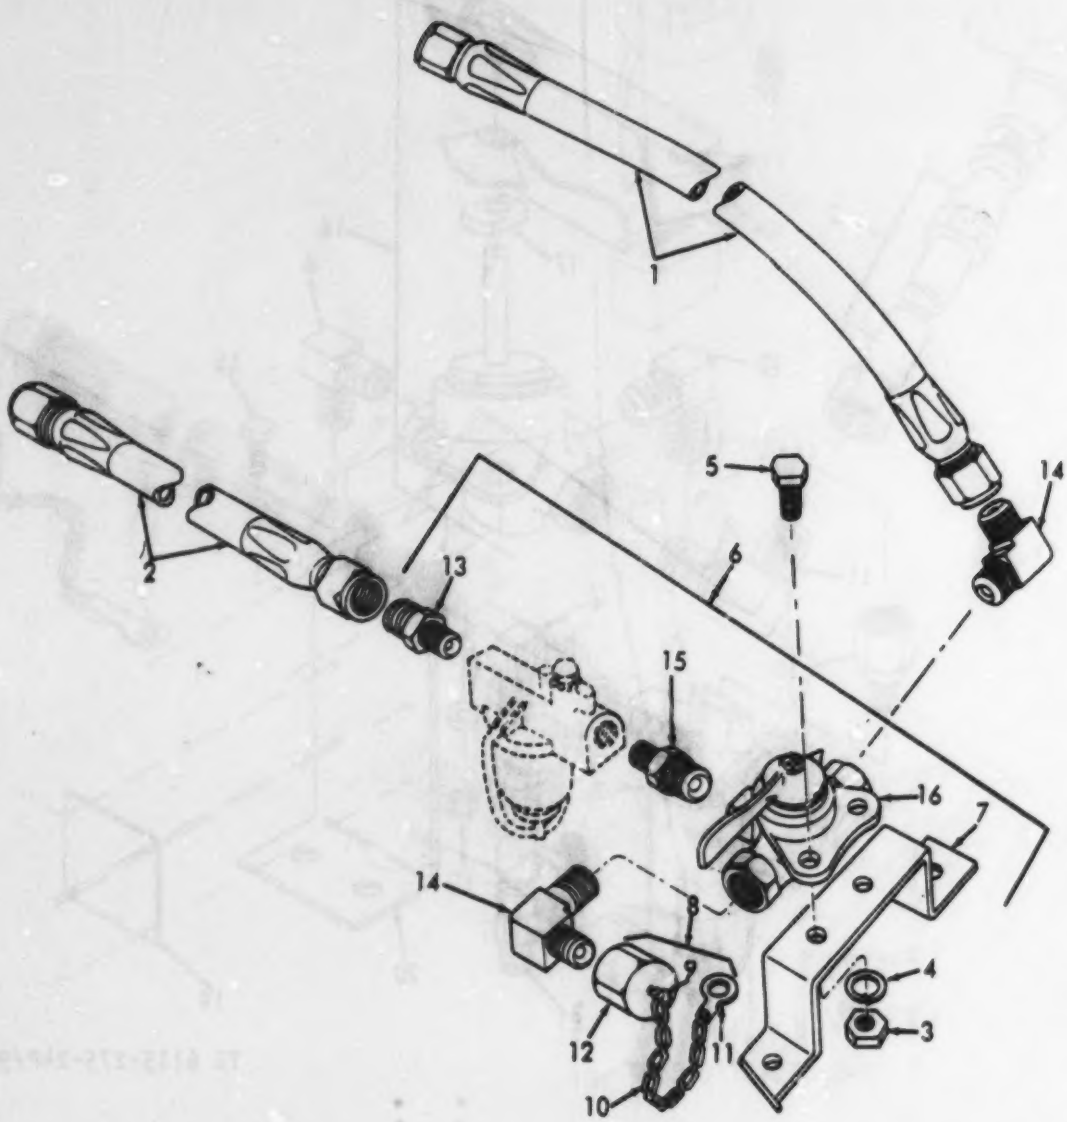

TS 6115-275-24P/9

Figure 9. Fuel valve, hose and fittings, (MEP-023A).

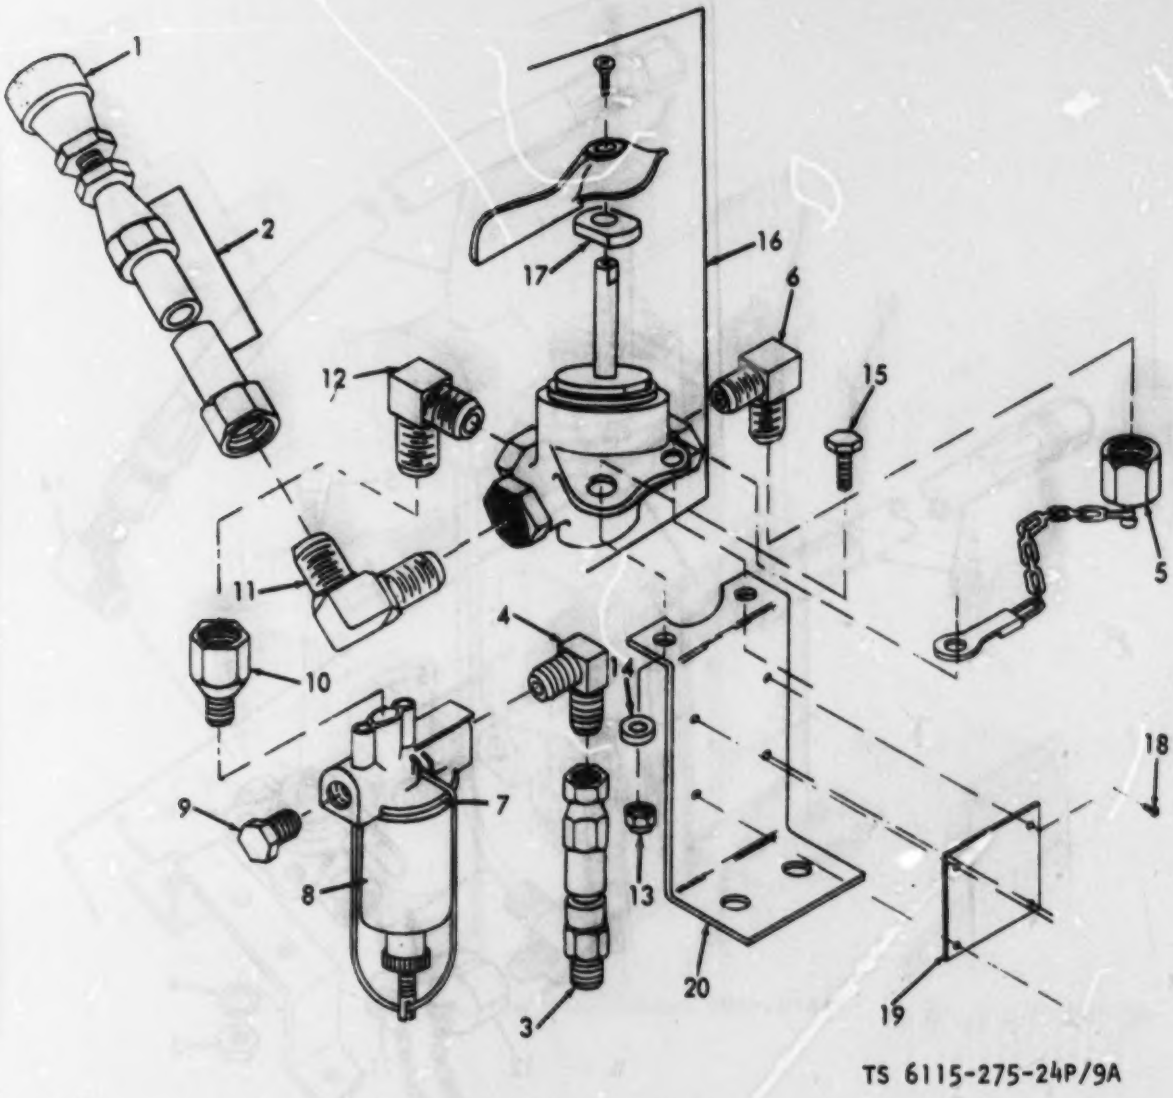

Figure 9A. Fuel line assembly (Used on serial number range MA68-0001 thru MA68-2987 only).

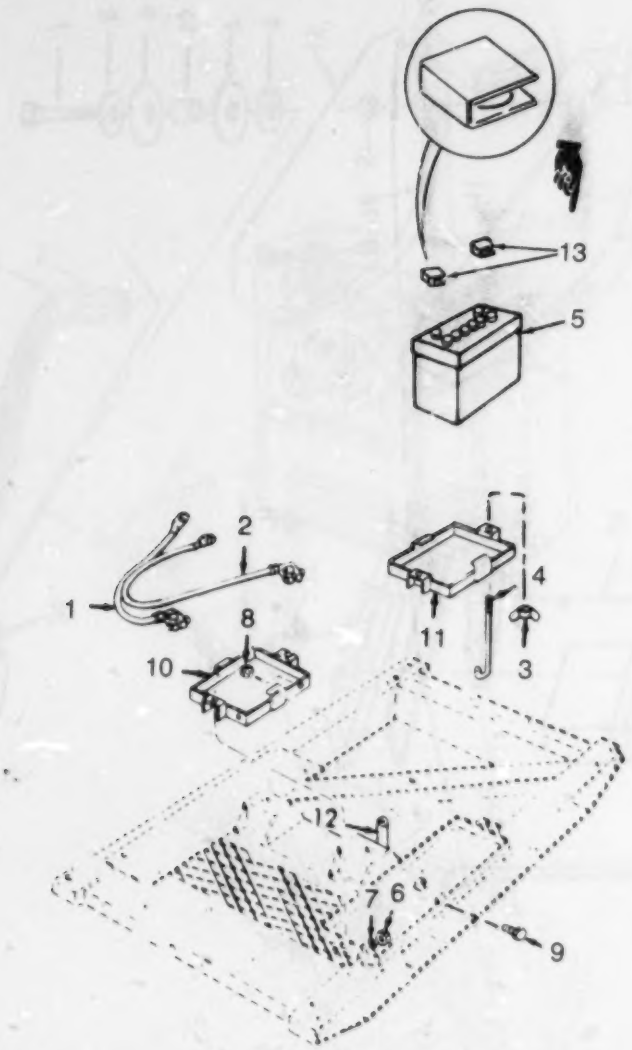

TM 5-6115-275-24P

Figure 10. Battery and cables, (Model MEP-018A).

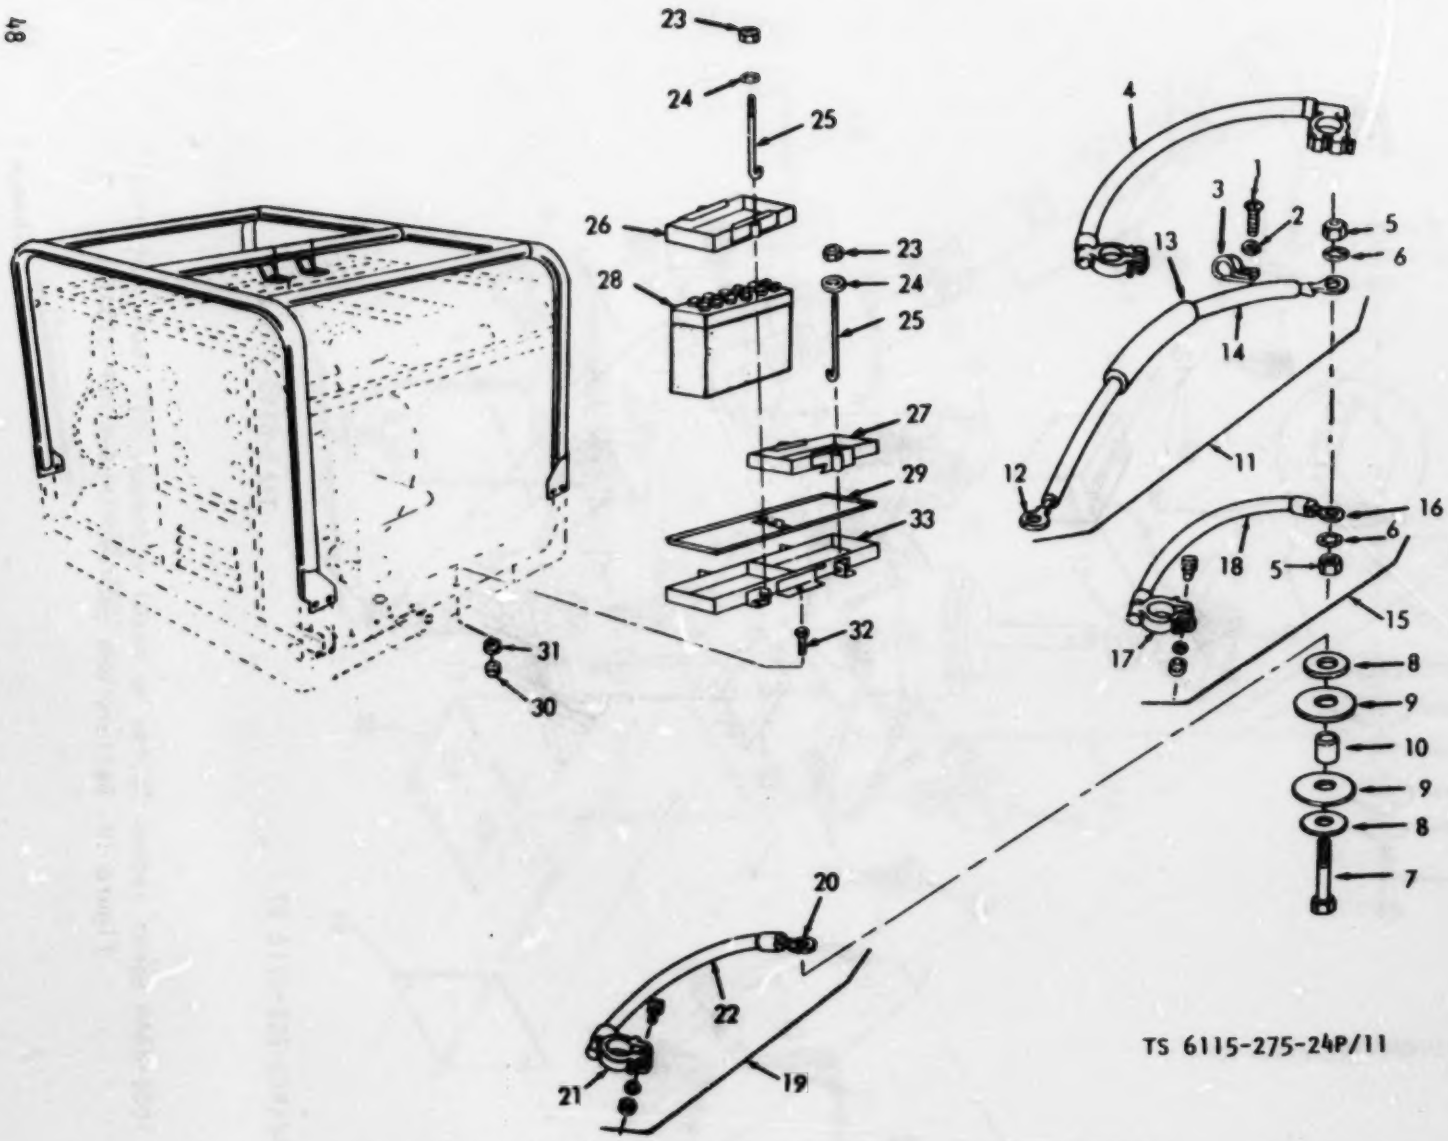

Figure 11. Battery, battery frame, and cables, (Model MEP-023A).

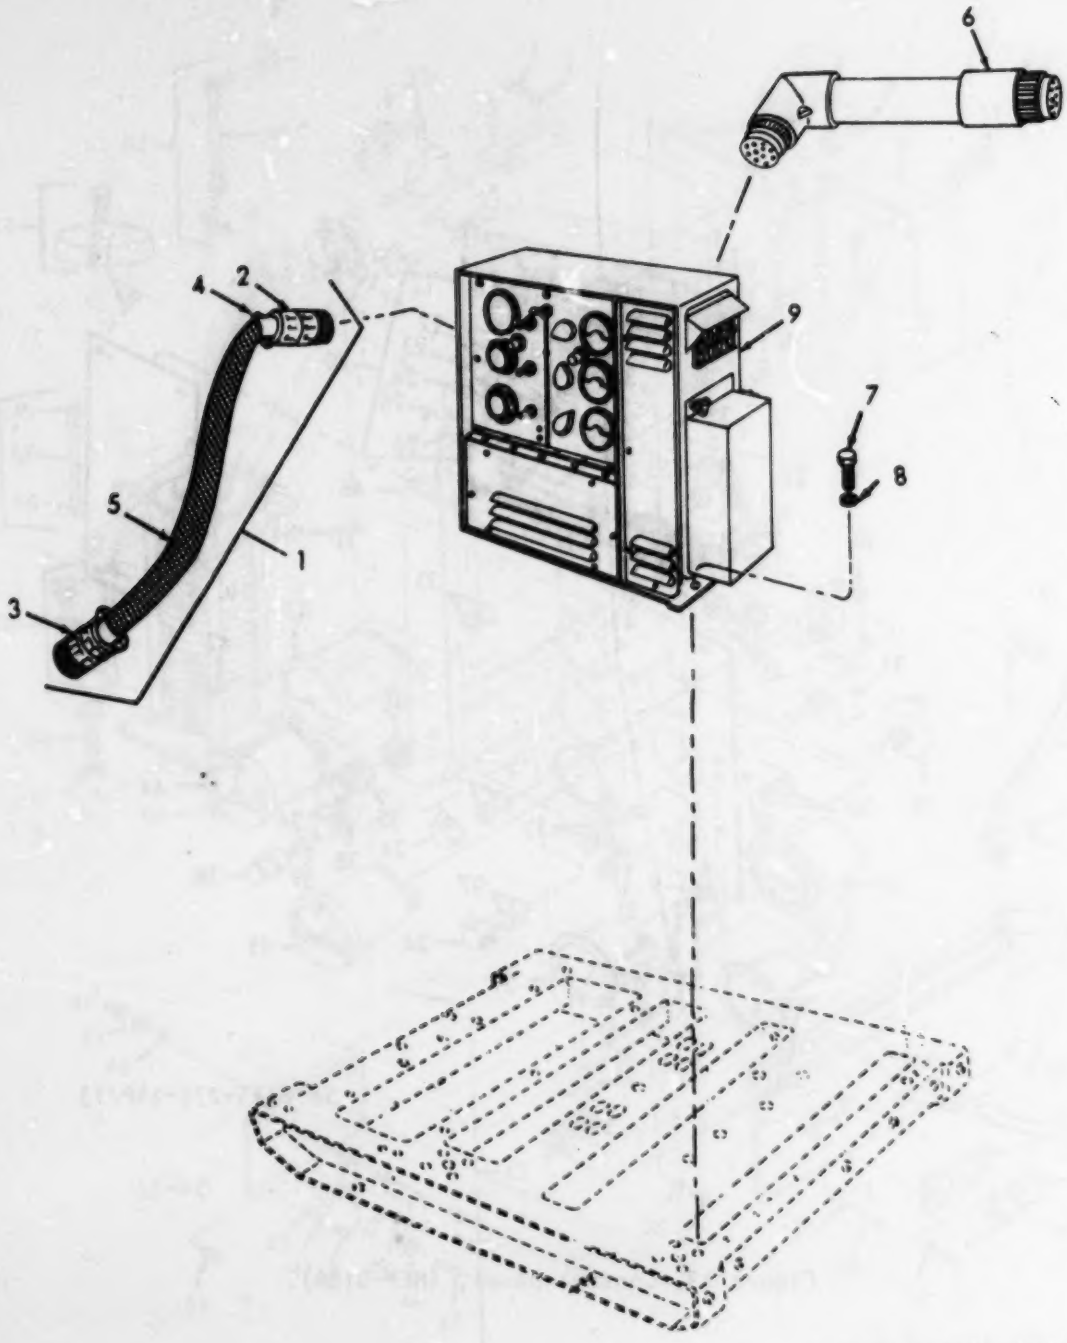

TS 6115-275-24P/12

Figure 12. Control box, engine and main generator cables.(MEP-018A).

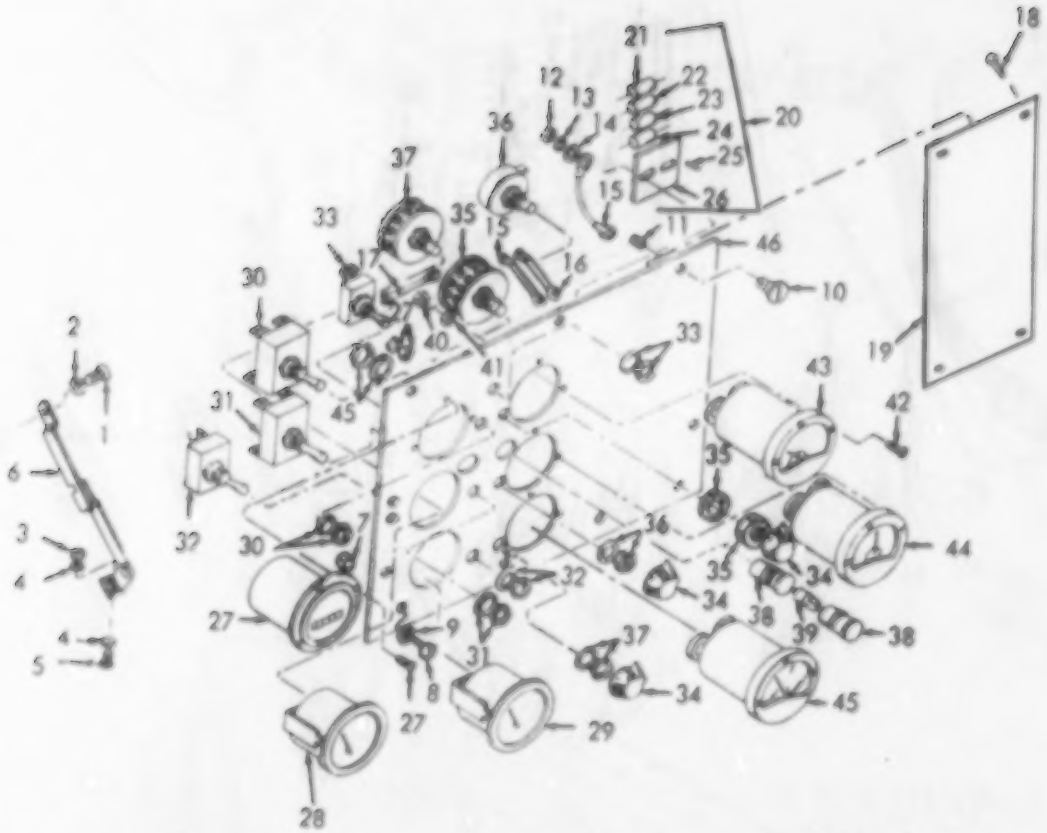

Figure 13. Control panel, (MEP-018A).

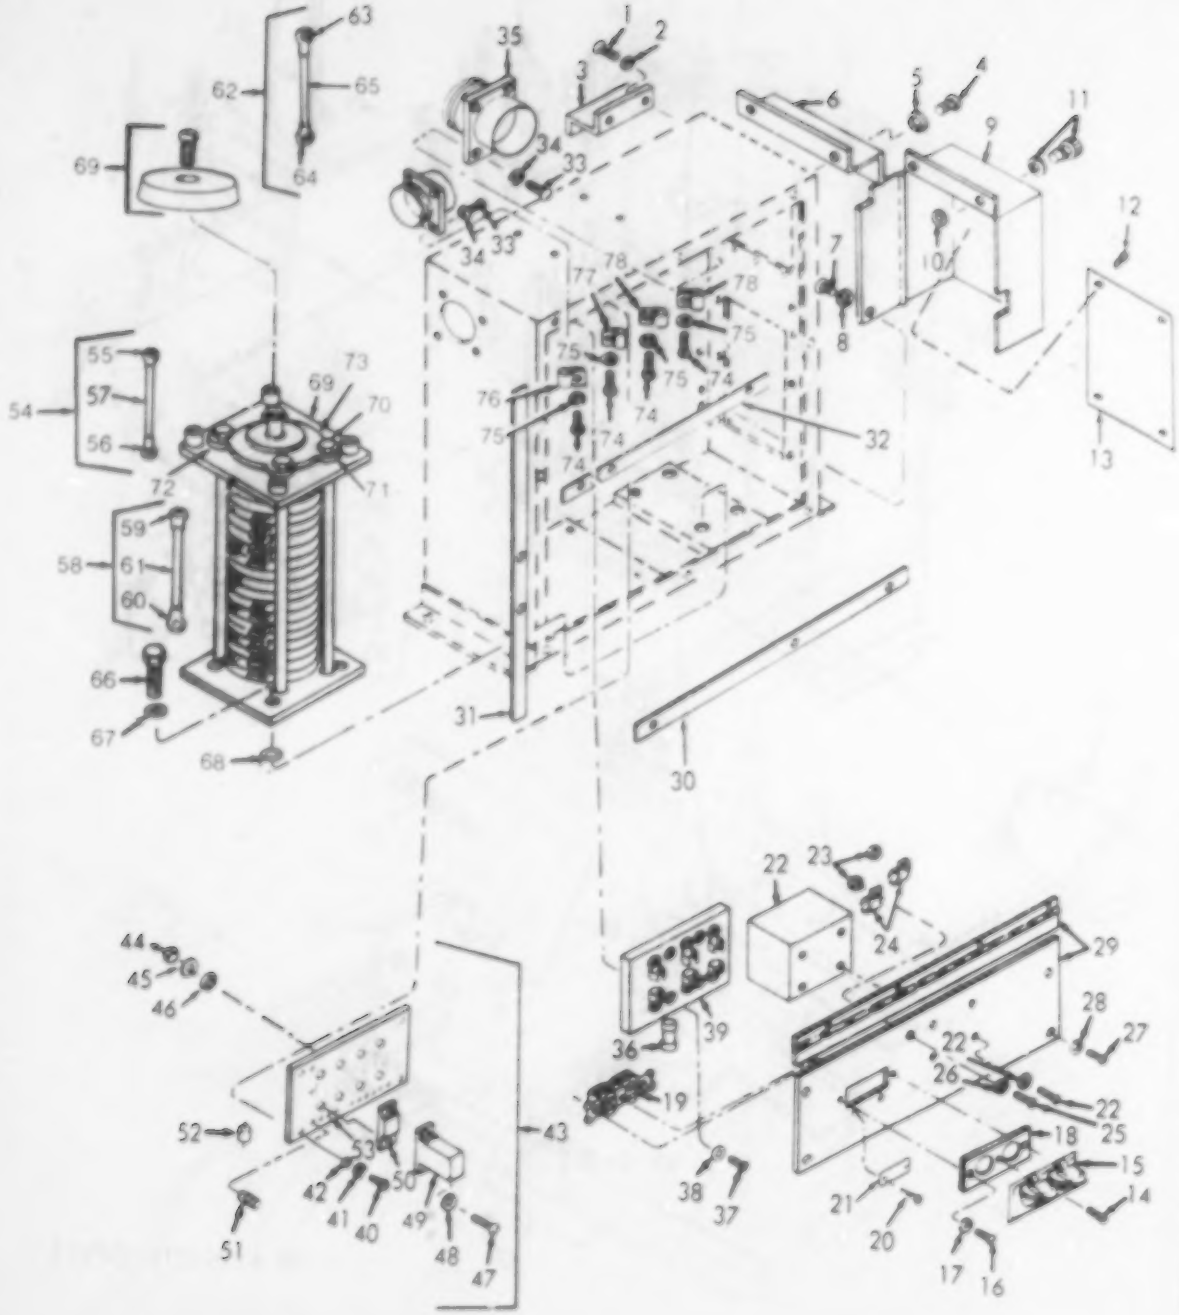

Figure 14. Control cabinet components, (Model MEP-018A).

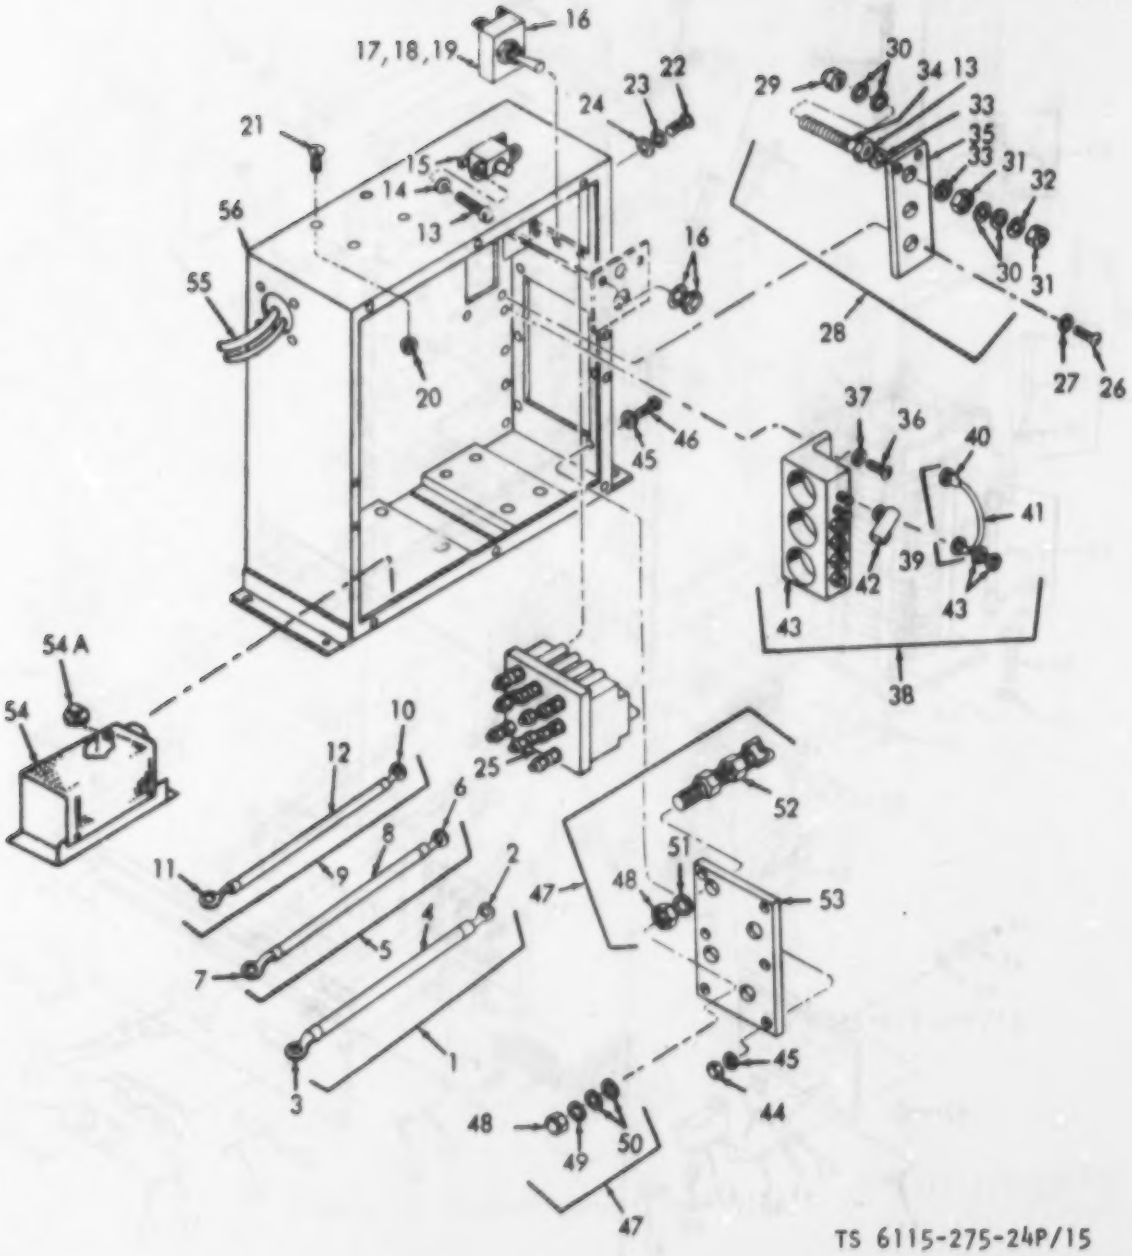

Figure 15. Control cabinet and components, (Model MEP-018A).

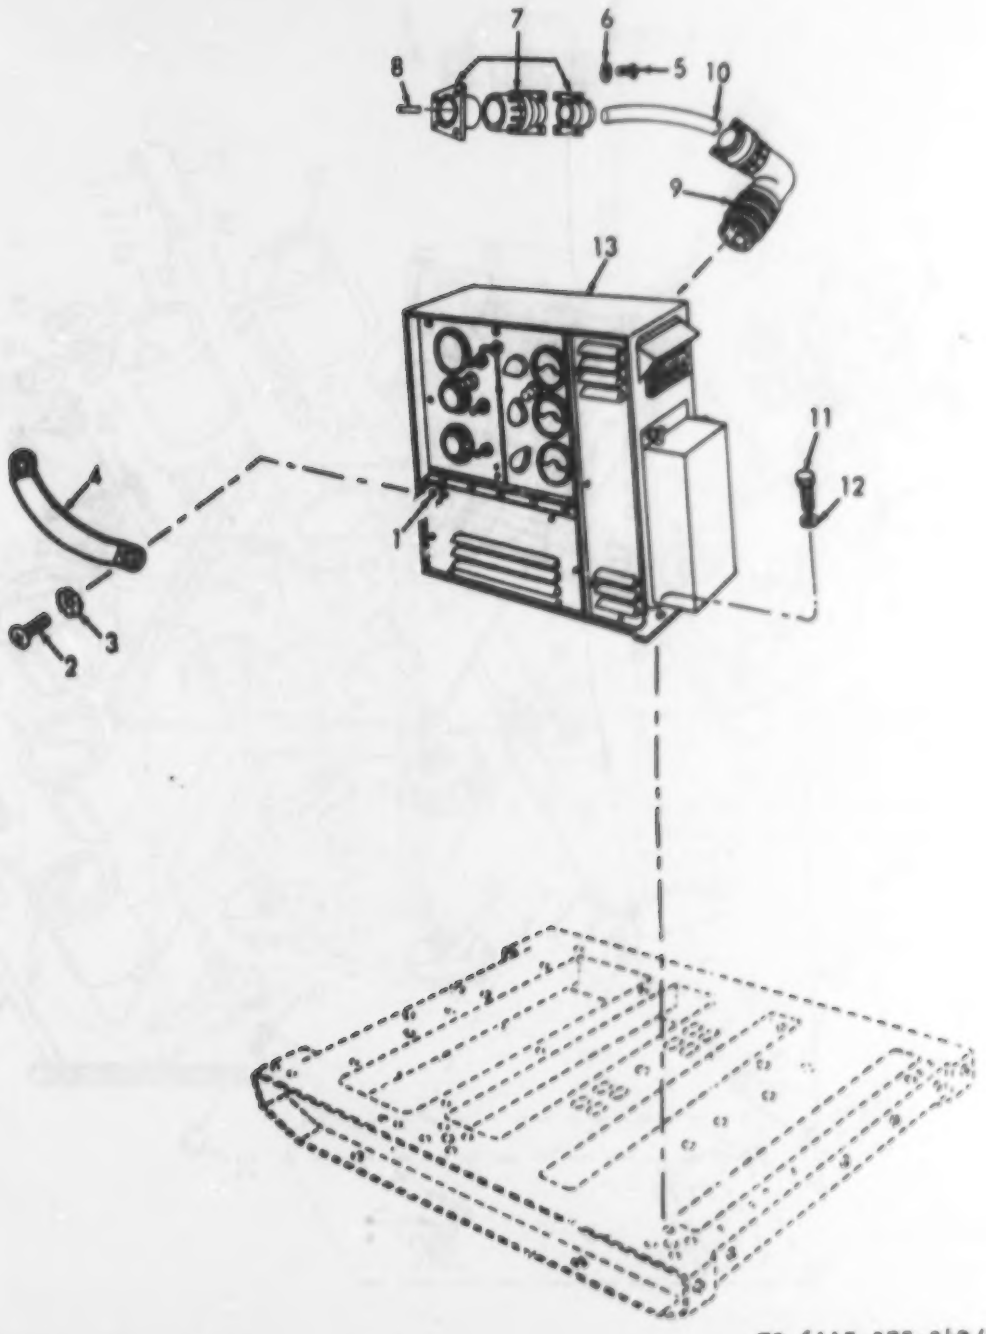

TS 6115-275-24P/16

Figure 16. Control panel assembly and ground strap, (Model-023A).

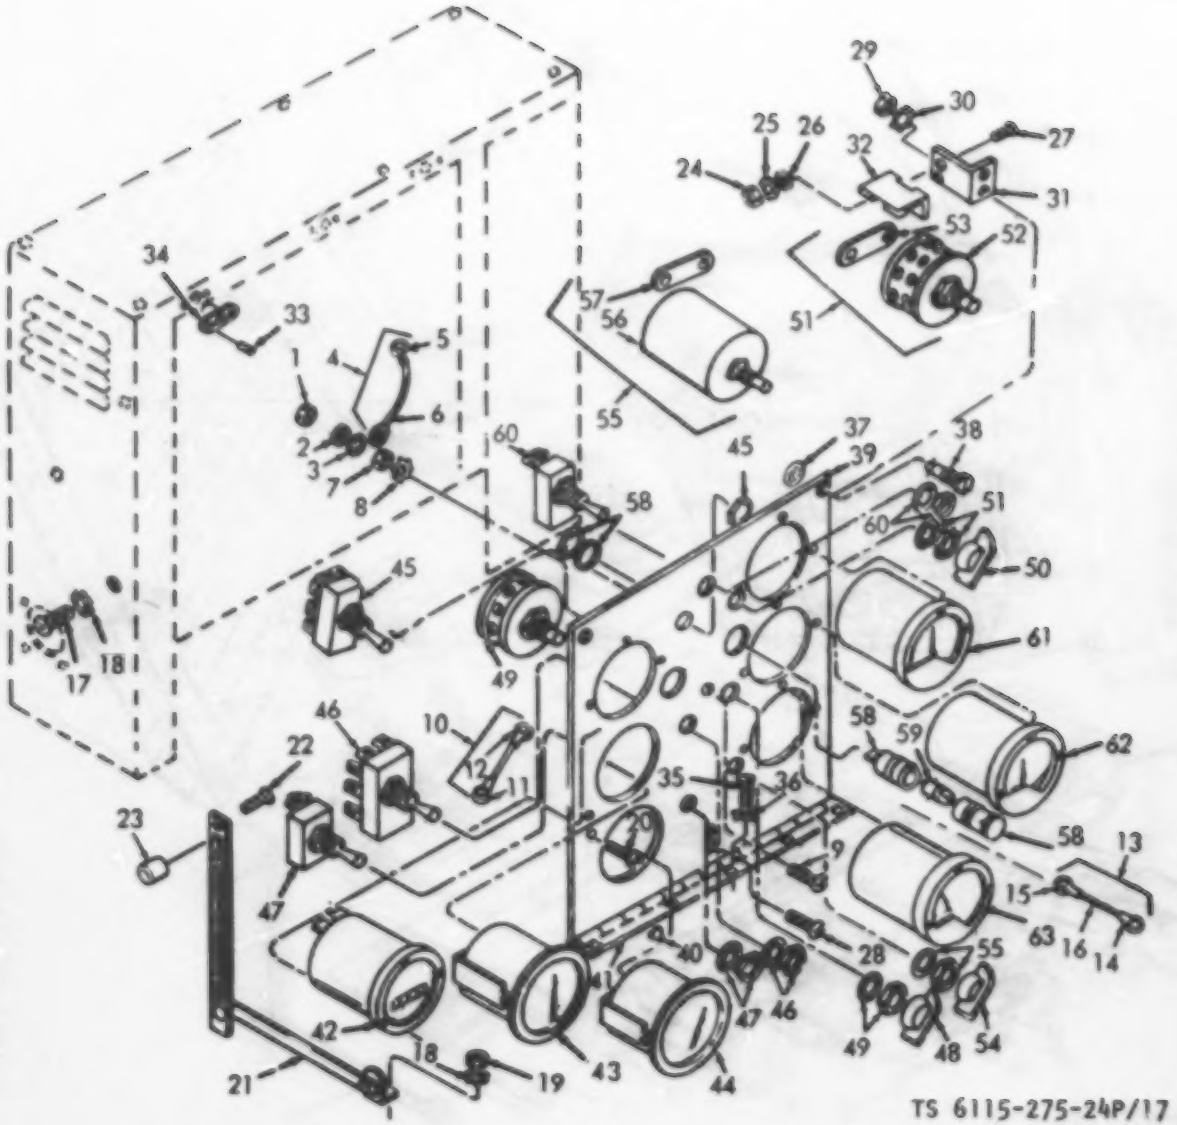

Figure 17. Instrument panel and related parts, (Model MEP-023A).

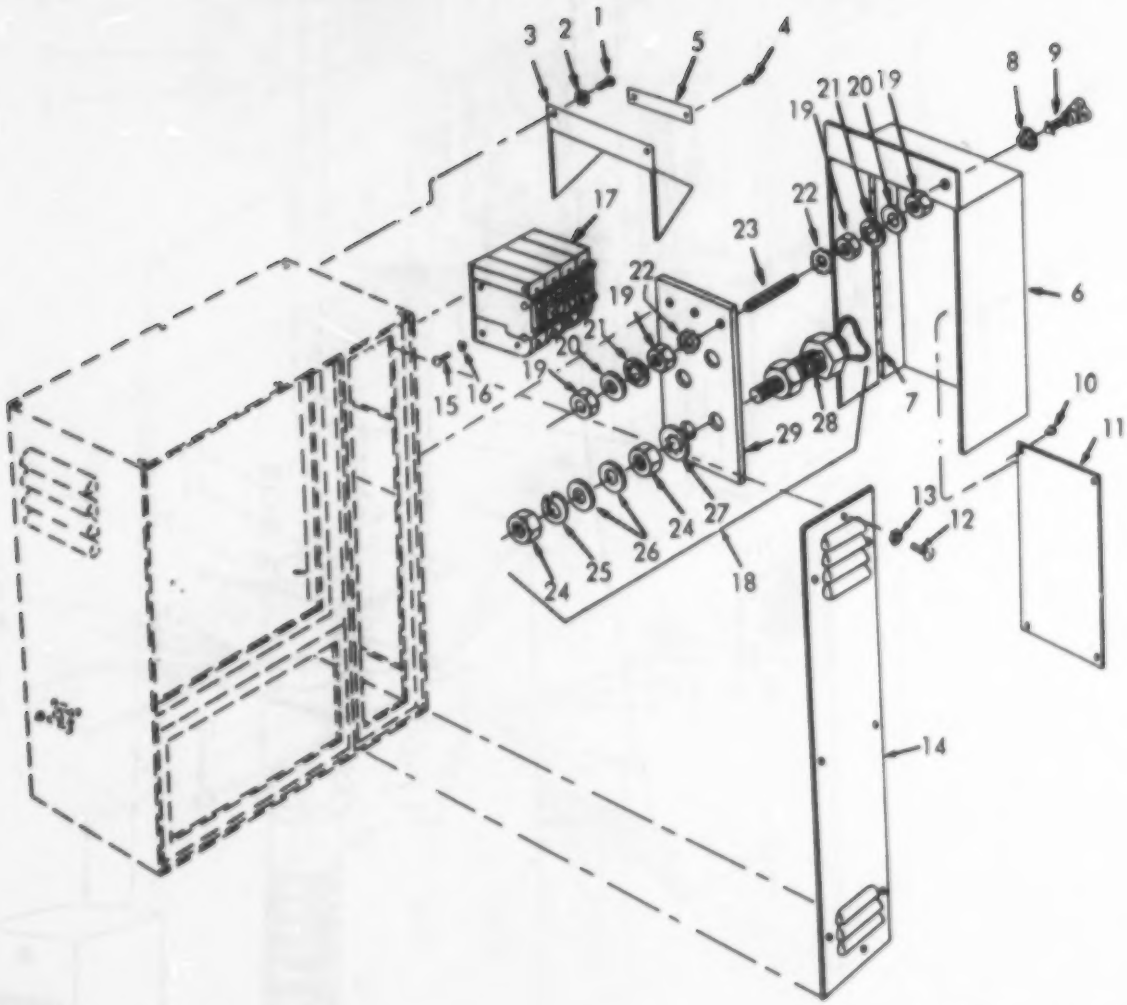

Figure 18. Circuit breaker, and terminal boards, (Model MEP-023A).

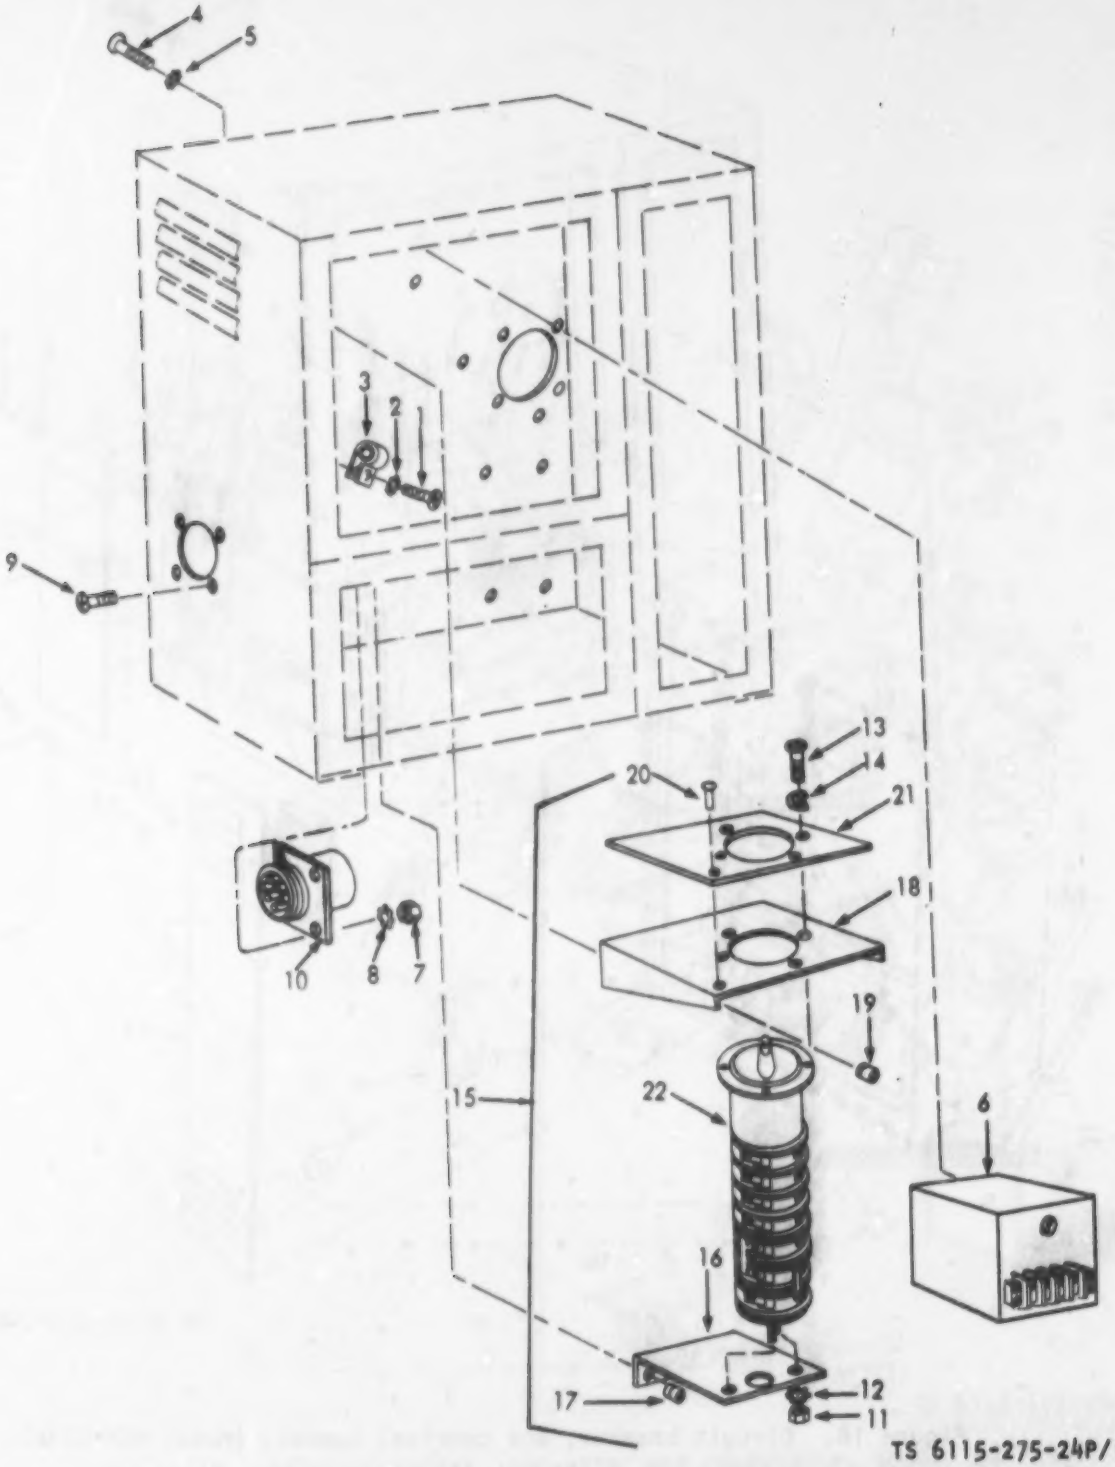

Figure 19. Selector switch, converter and receptacle, (Model MEP-023A).

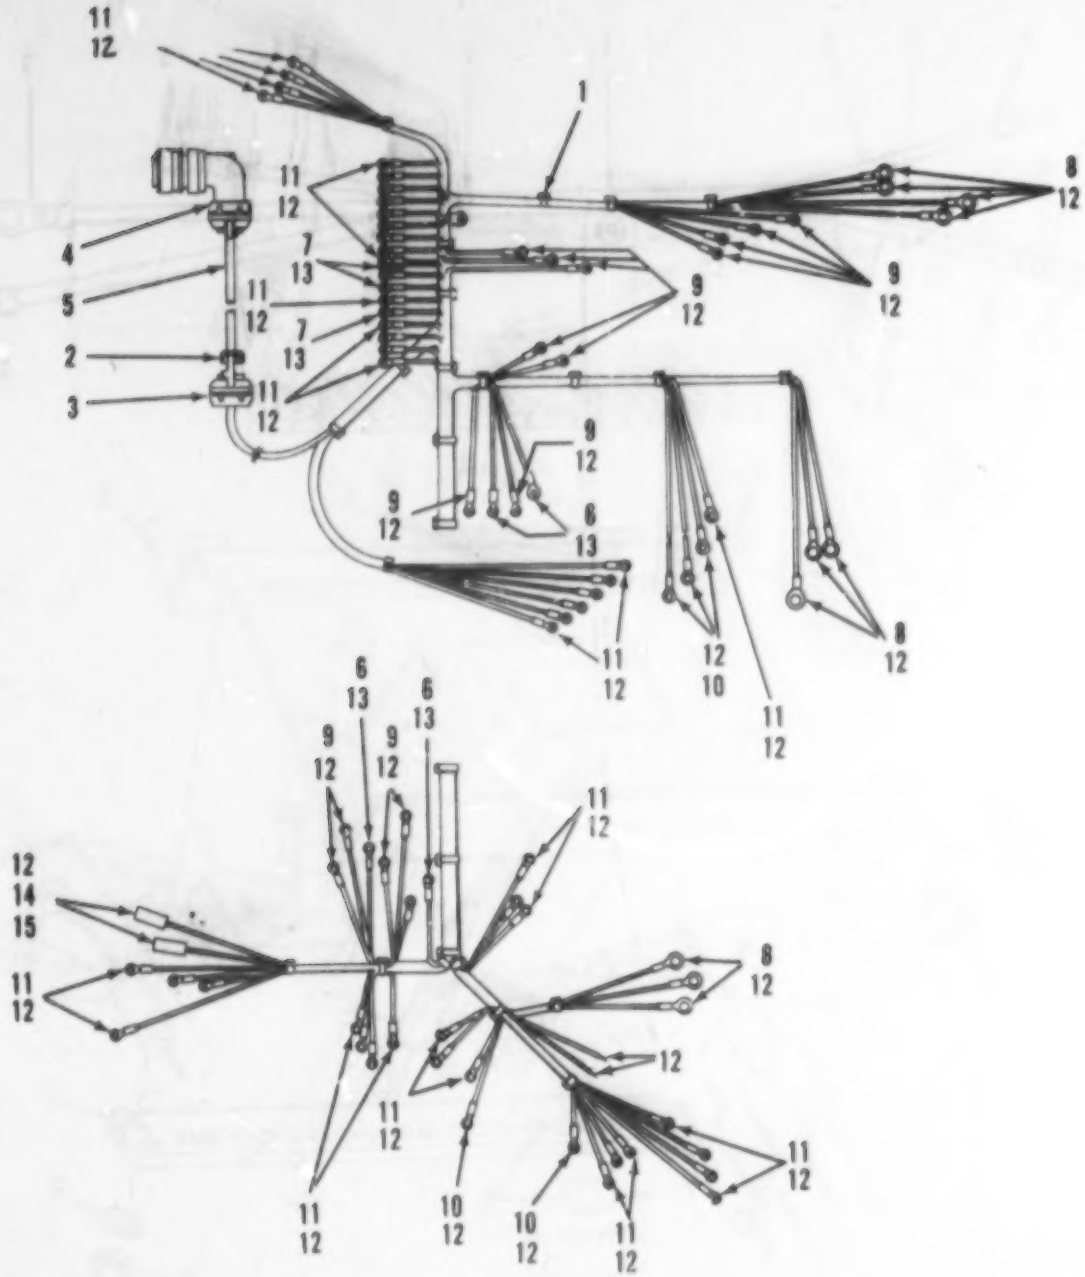

Figure 19A. Wiring Harness (Model MEP-023A).

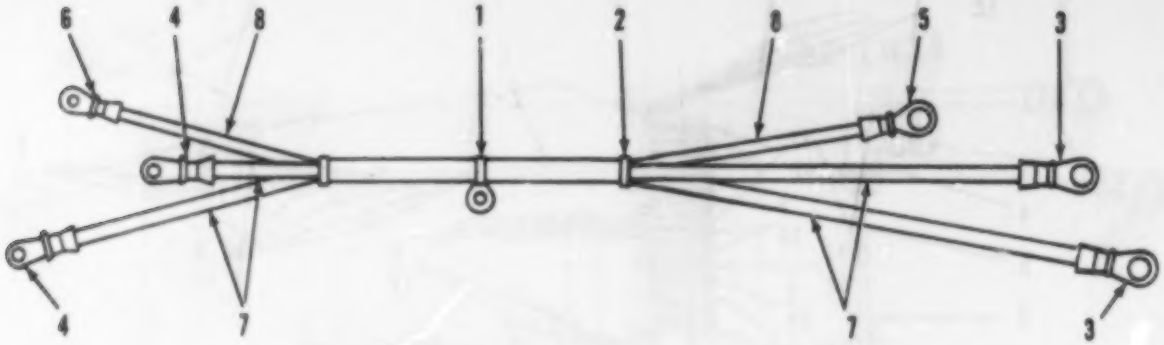

Figure 19B. Wiring Harness (Model MEP-023A).

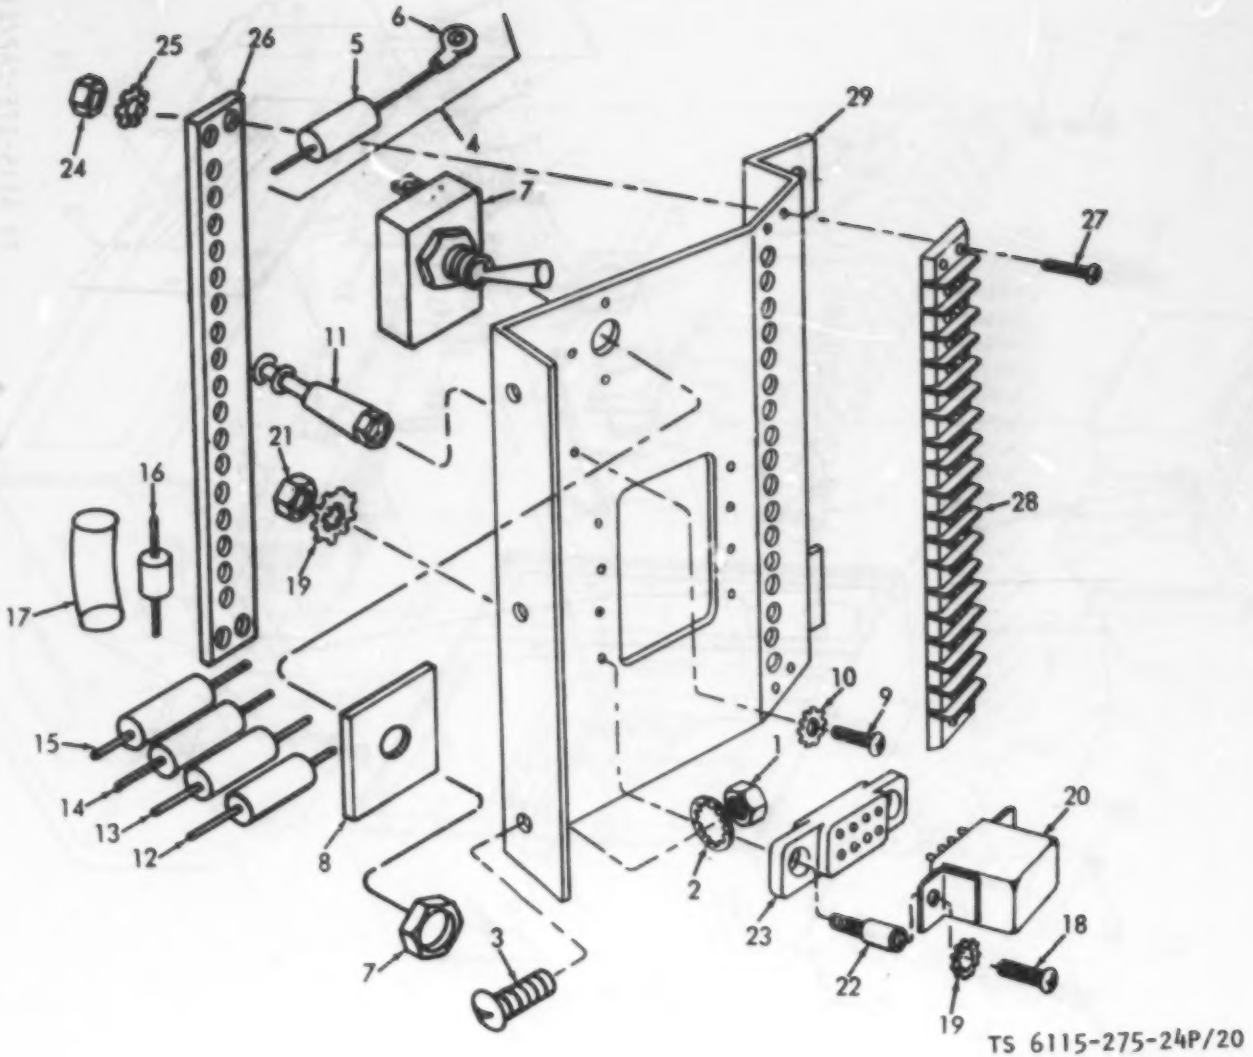

Figure 20. Relay panel, (Model MEP-023A).

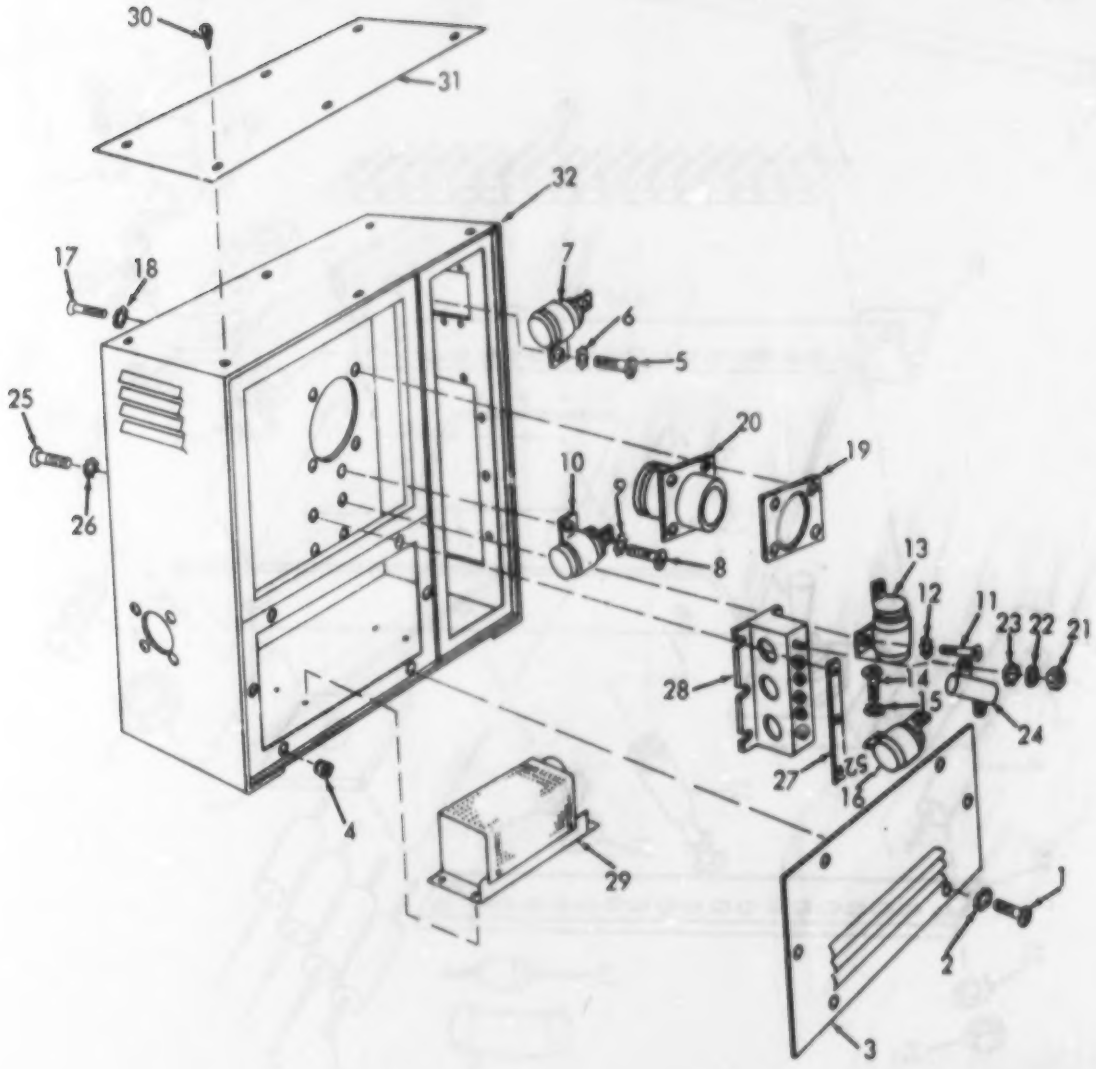

Figure 21. Control box, capacitors, transformer and resistors, (Model MEP-023A).

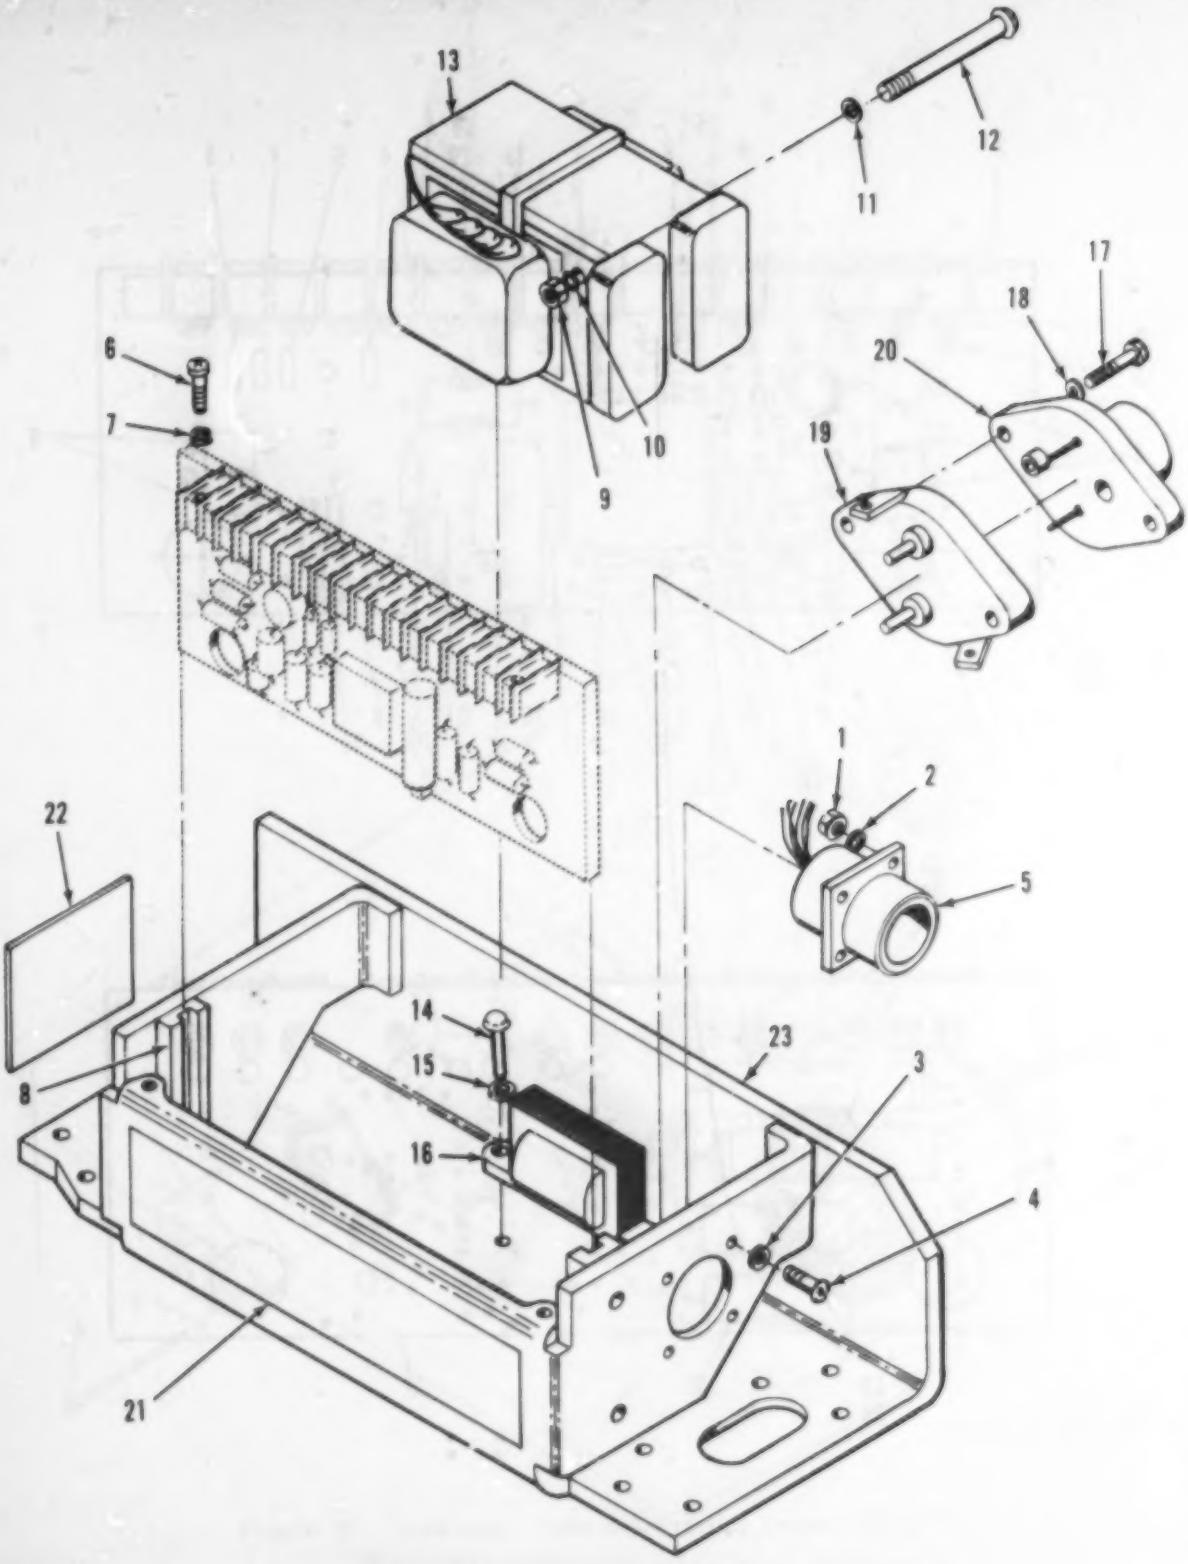

Figure 21A. Voltage Regulator (Model MEP-023A).

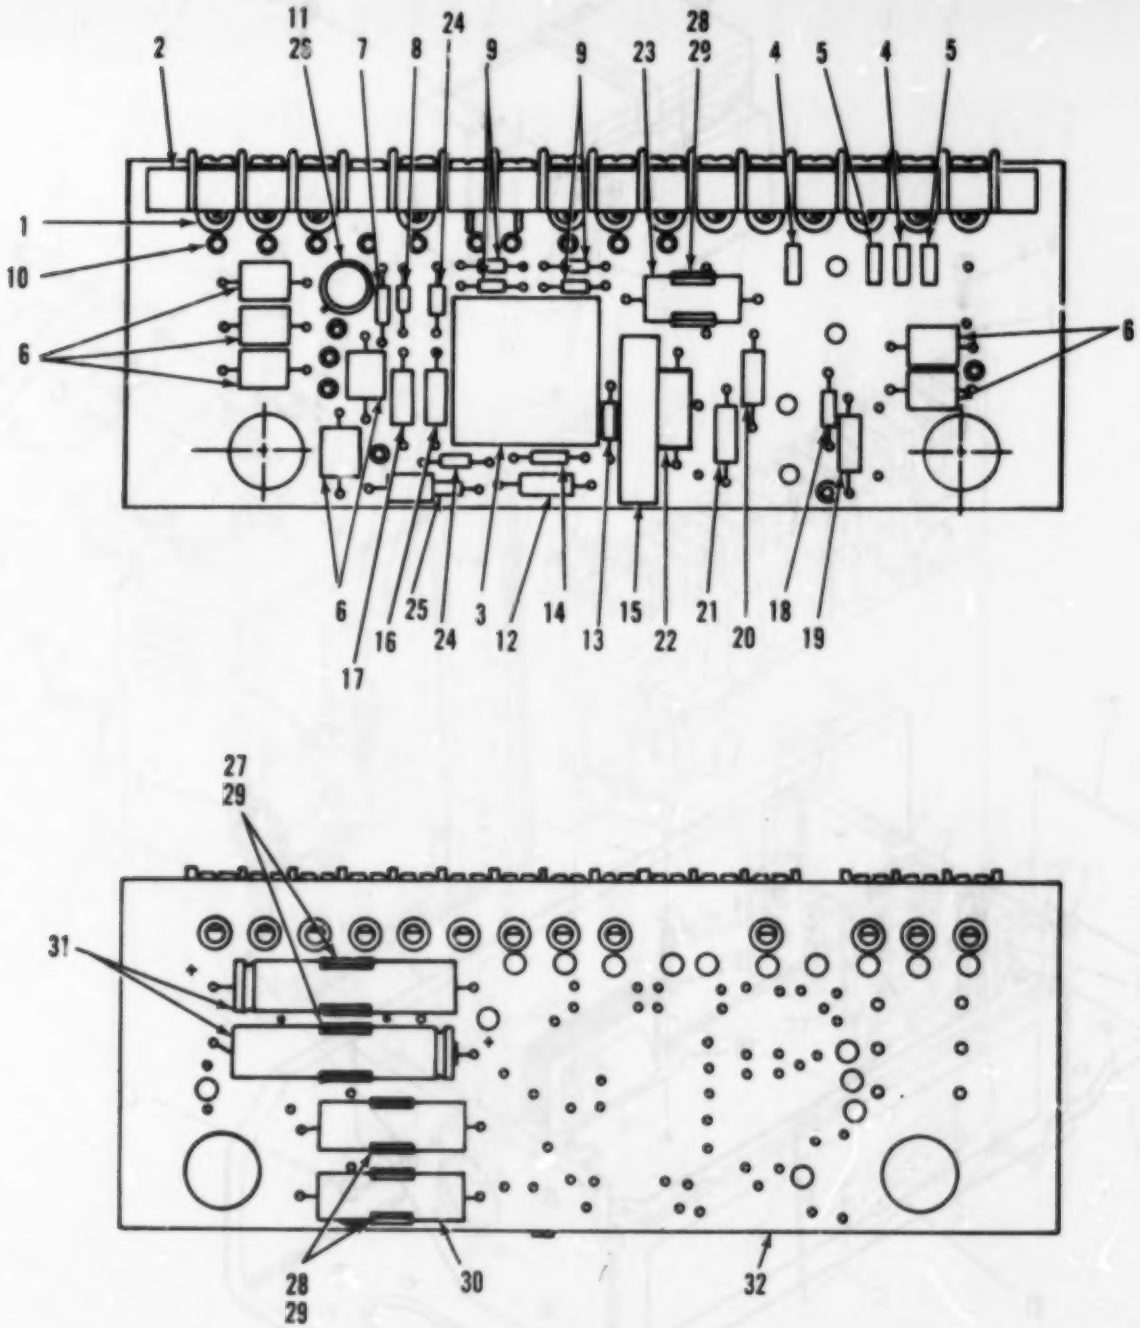

Figure 21B. Regulator PWB (Model MEP-023A).

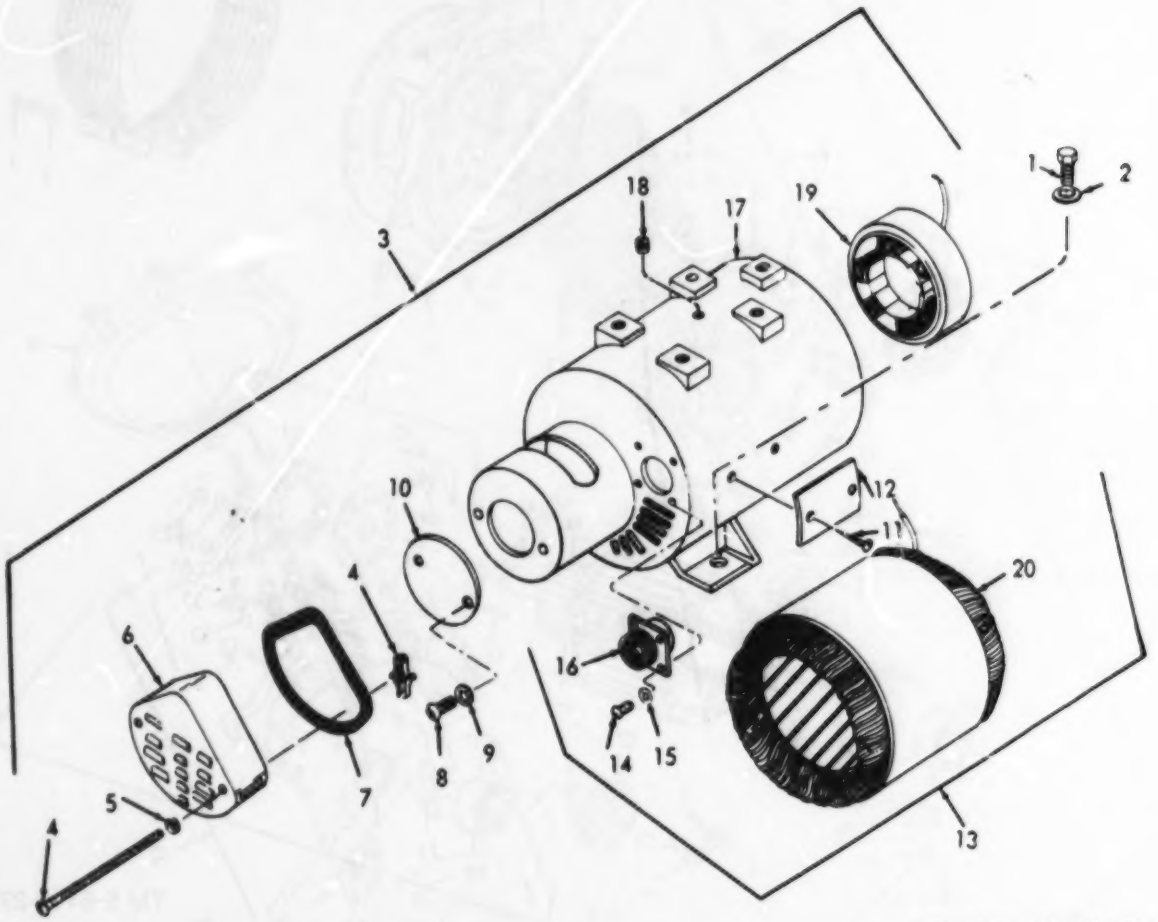

Figure 22. Generator frame and stator, (Model MEP-018A).

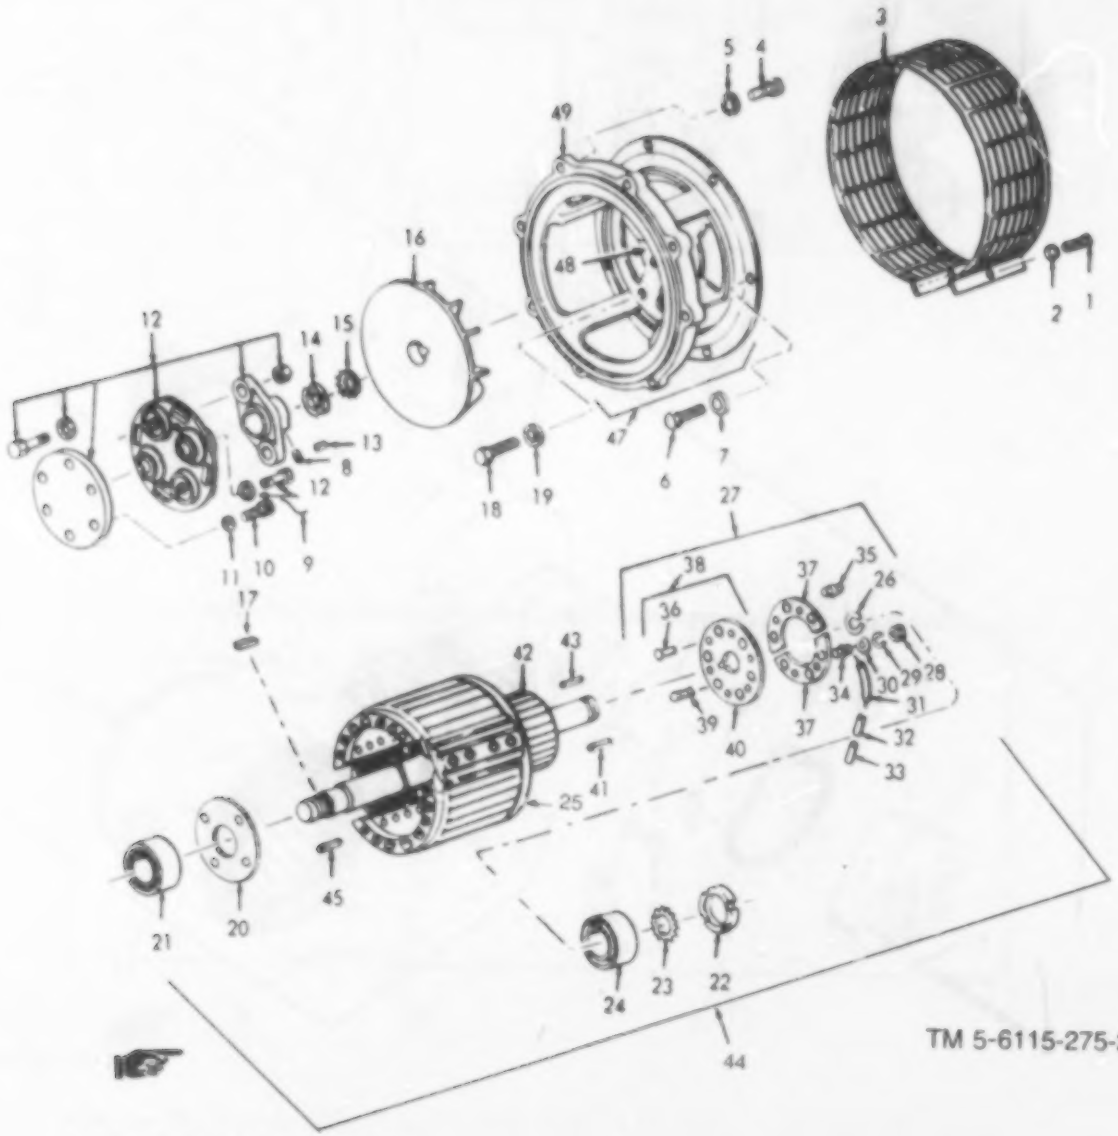

Figure 23. Drive coupling, rotor and components, (Model MEP-018A).

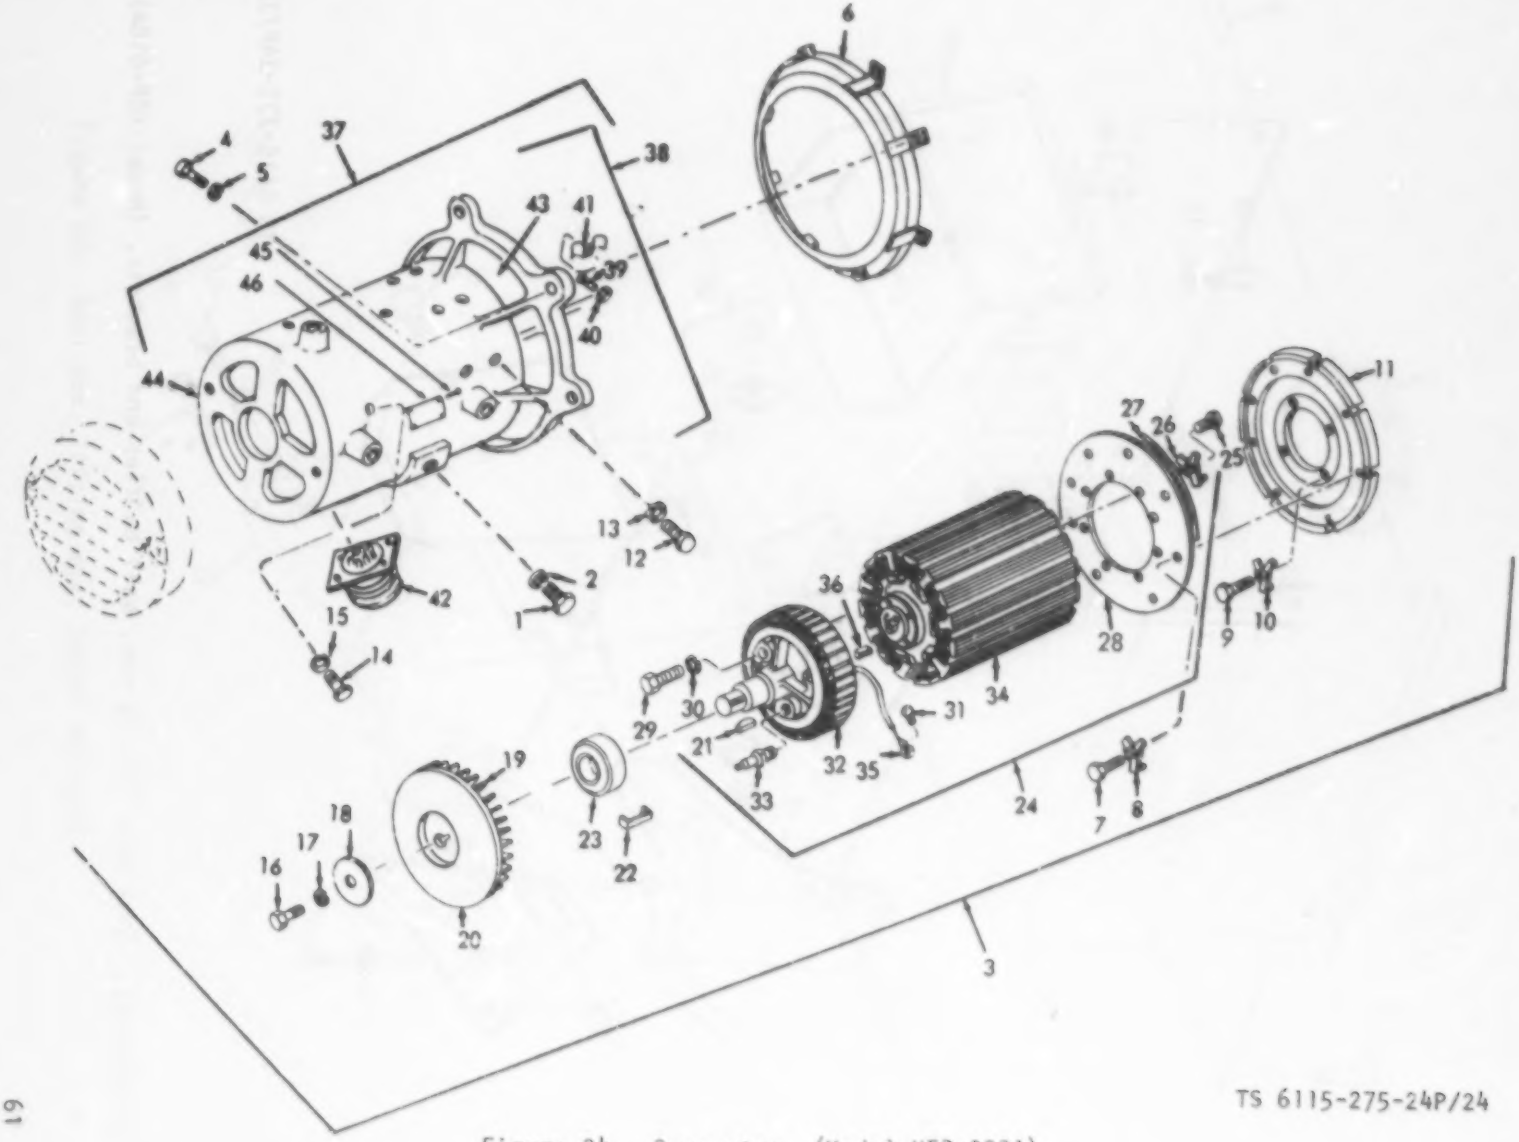

TS 6115-275-24P/24

Figure 24. Generator, (Model MEP-023A).

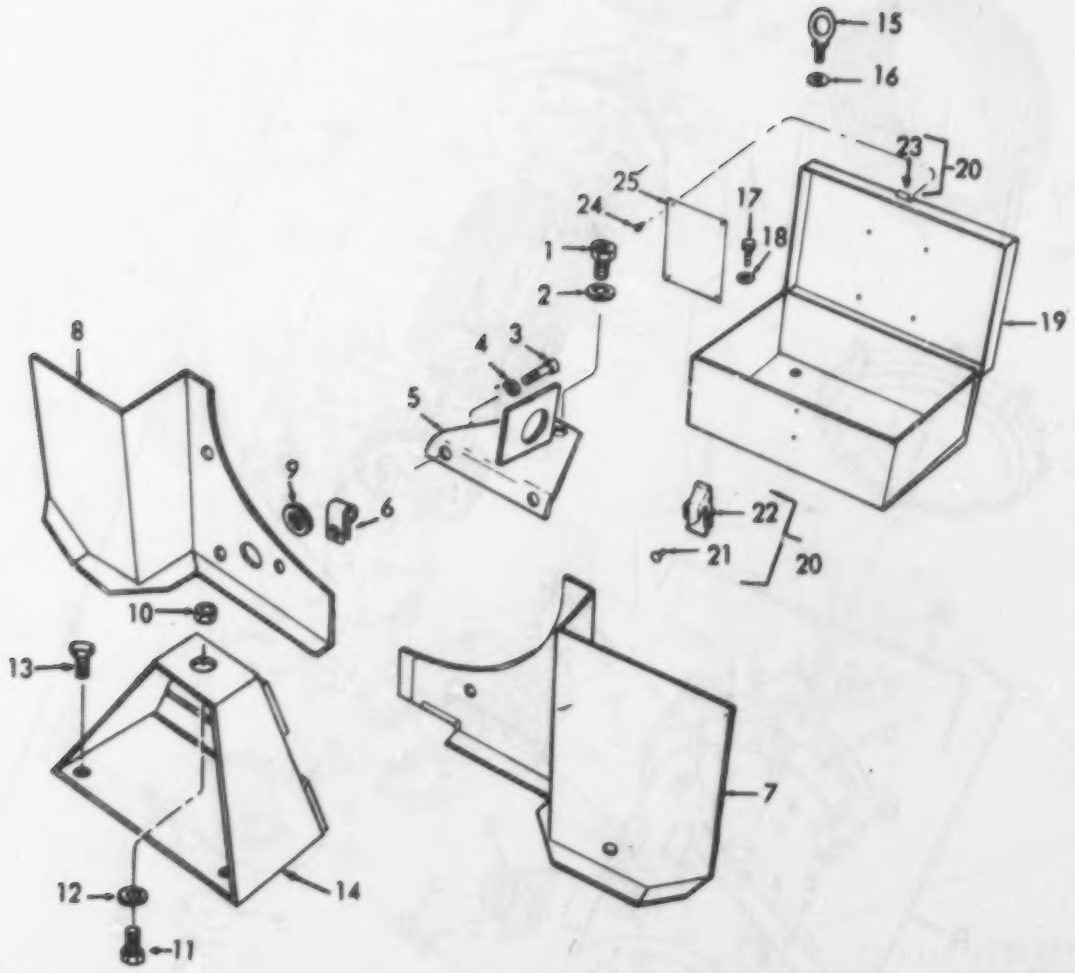

Figure 25. Tool box, lifting eye, ball baffles and brackets, (Model MEP-018A).

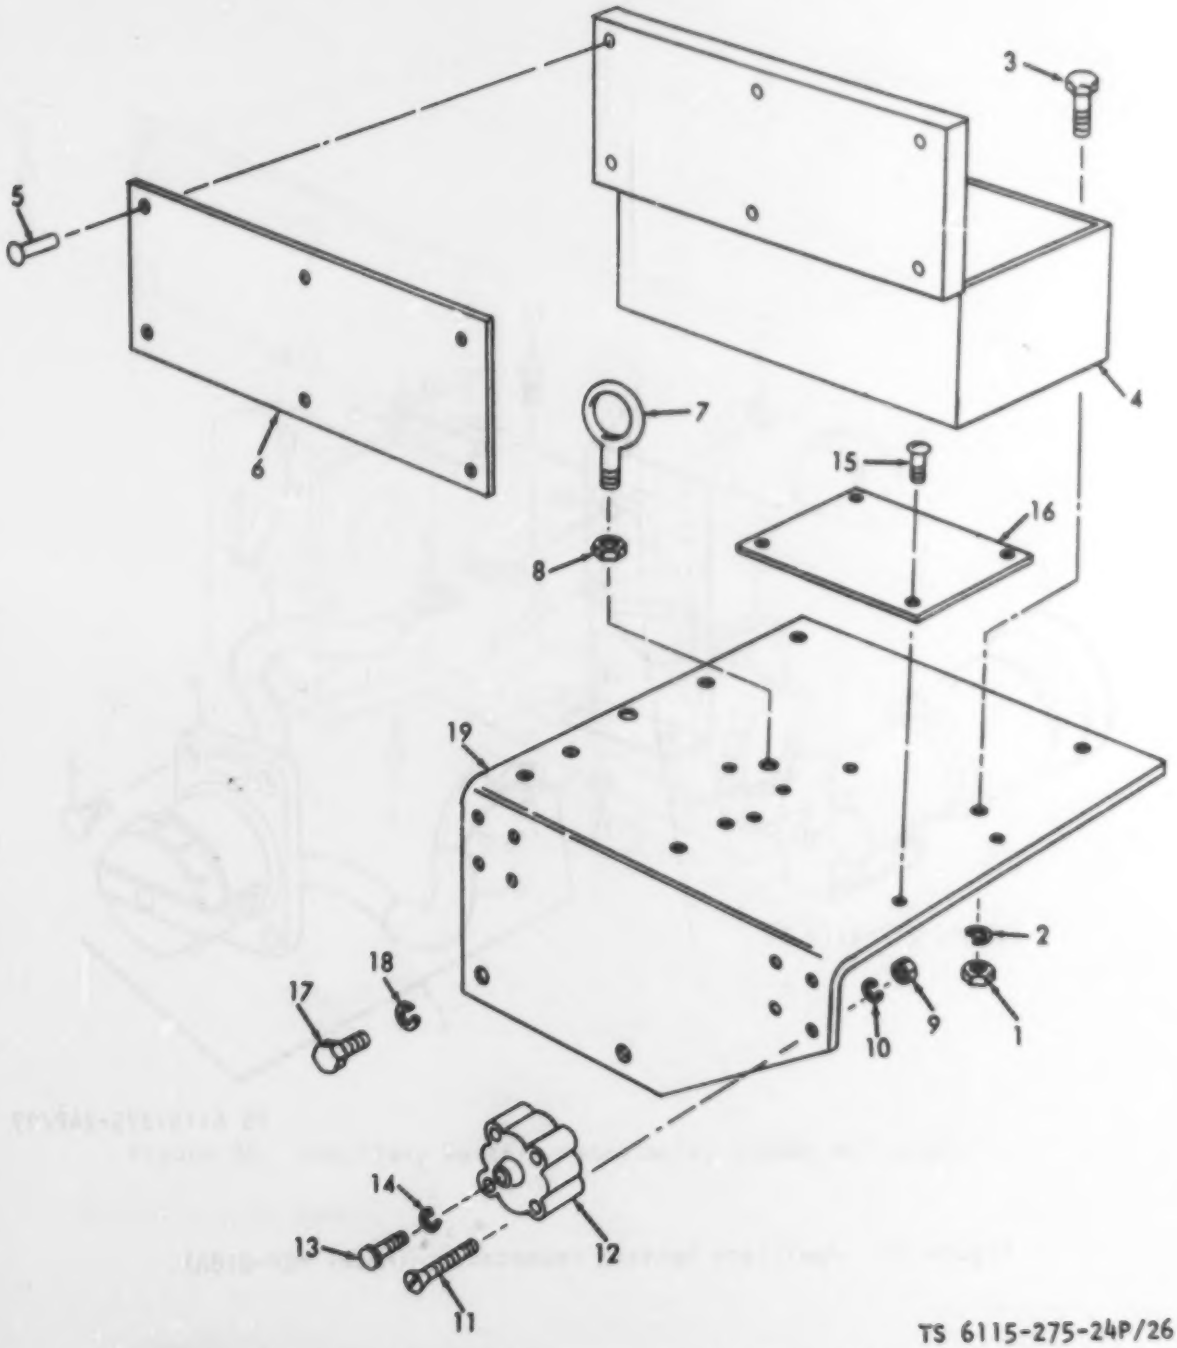

TS 6115-275-24P/26

Figure 26. Tool box, lifting eye, (Model MEP-023A).

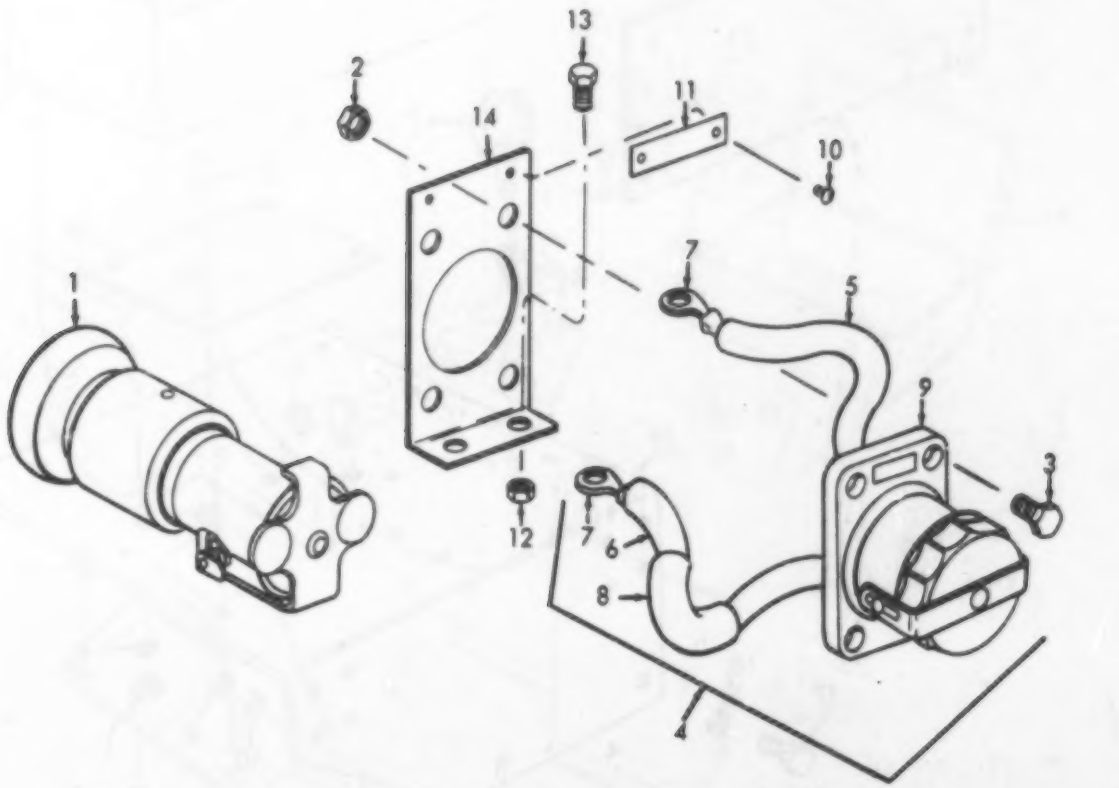

Figure 27. Auxiliary battery receptacle, (Model MEP-018A).

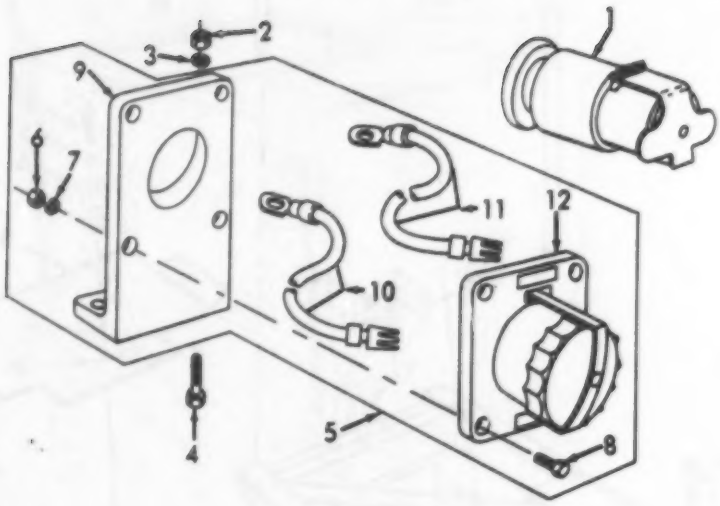

TS 6115-275-24P/28

Figure 28. Auxiliary battery receptacle, (Model MEP-023A).

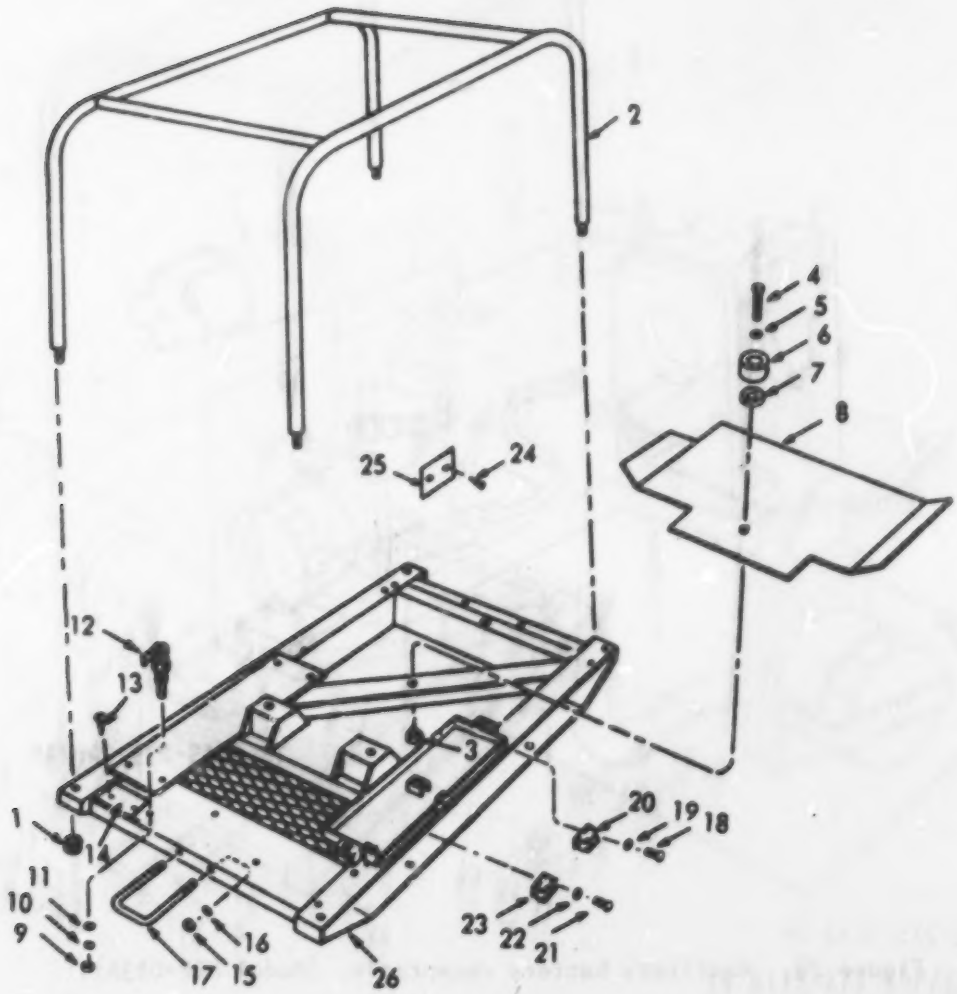

TS 6115-275-24P/29

Figure 29. Skid base and component parts, (Model MEP-018A).

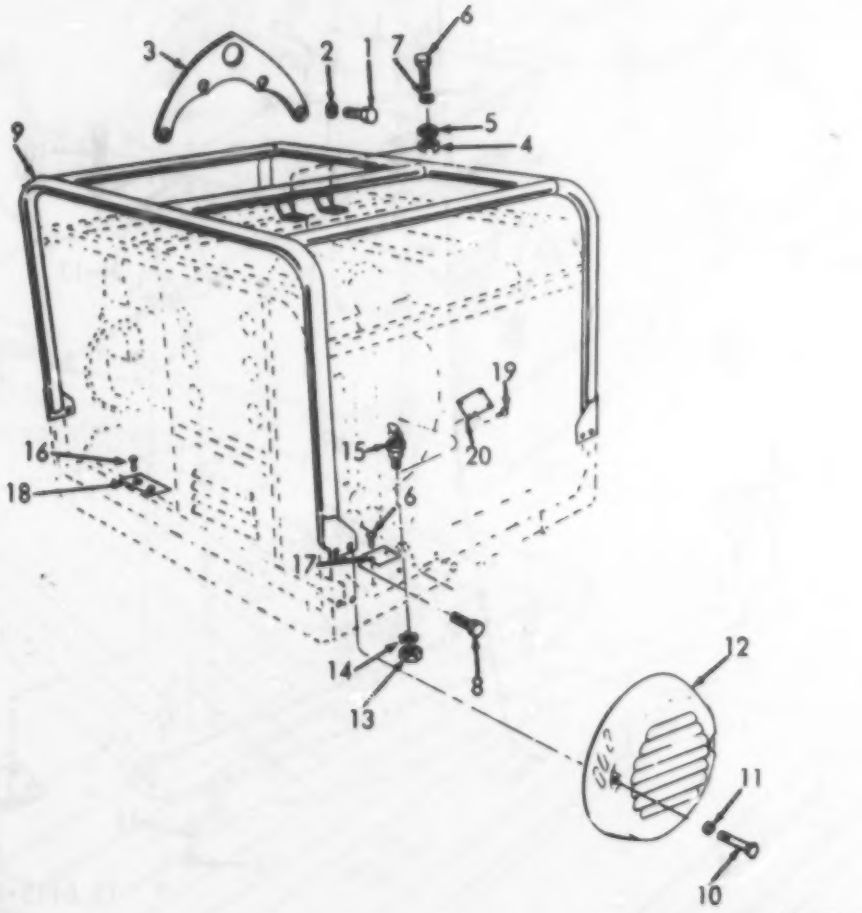

Figure 30. Guard, lifting bracket and fan cover, (Model MEP-023A).

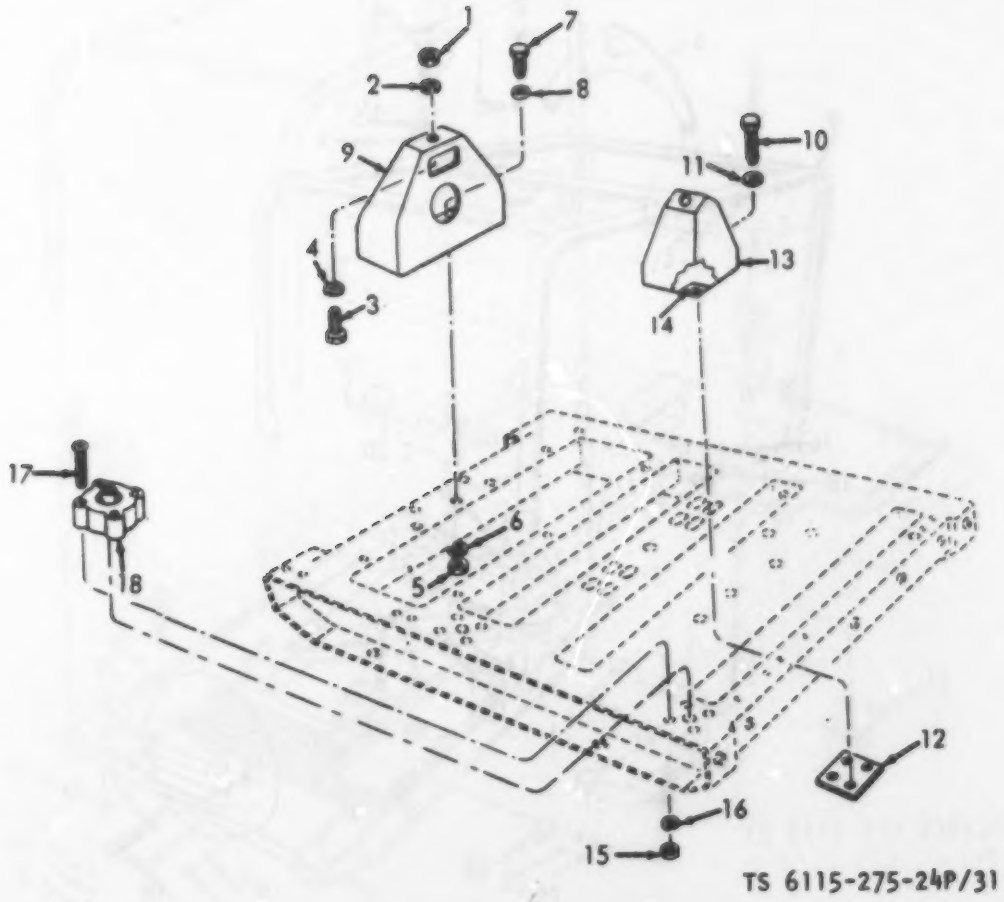

Figure 31. Engine and generator mounts, (Model MEP-023A).

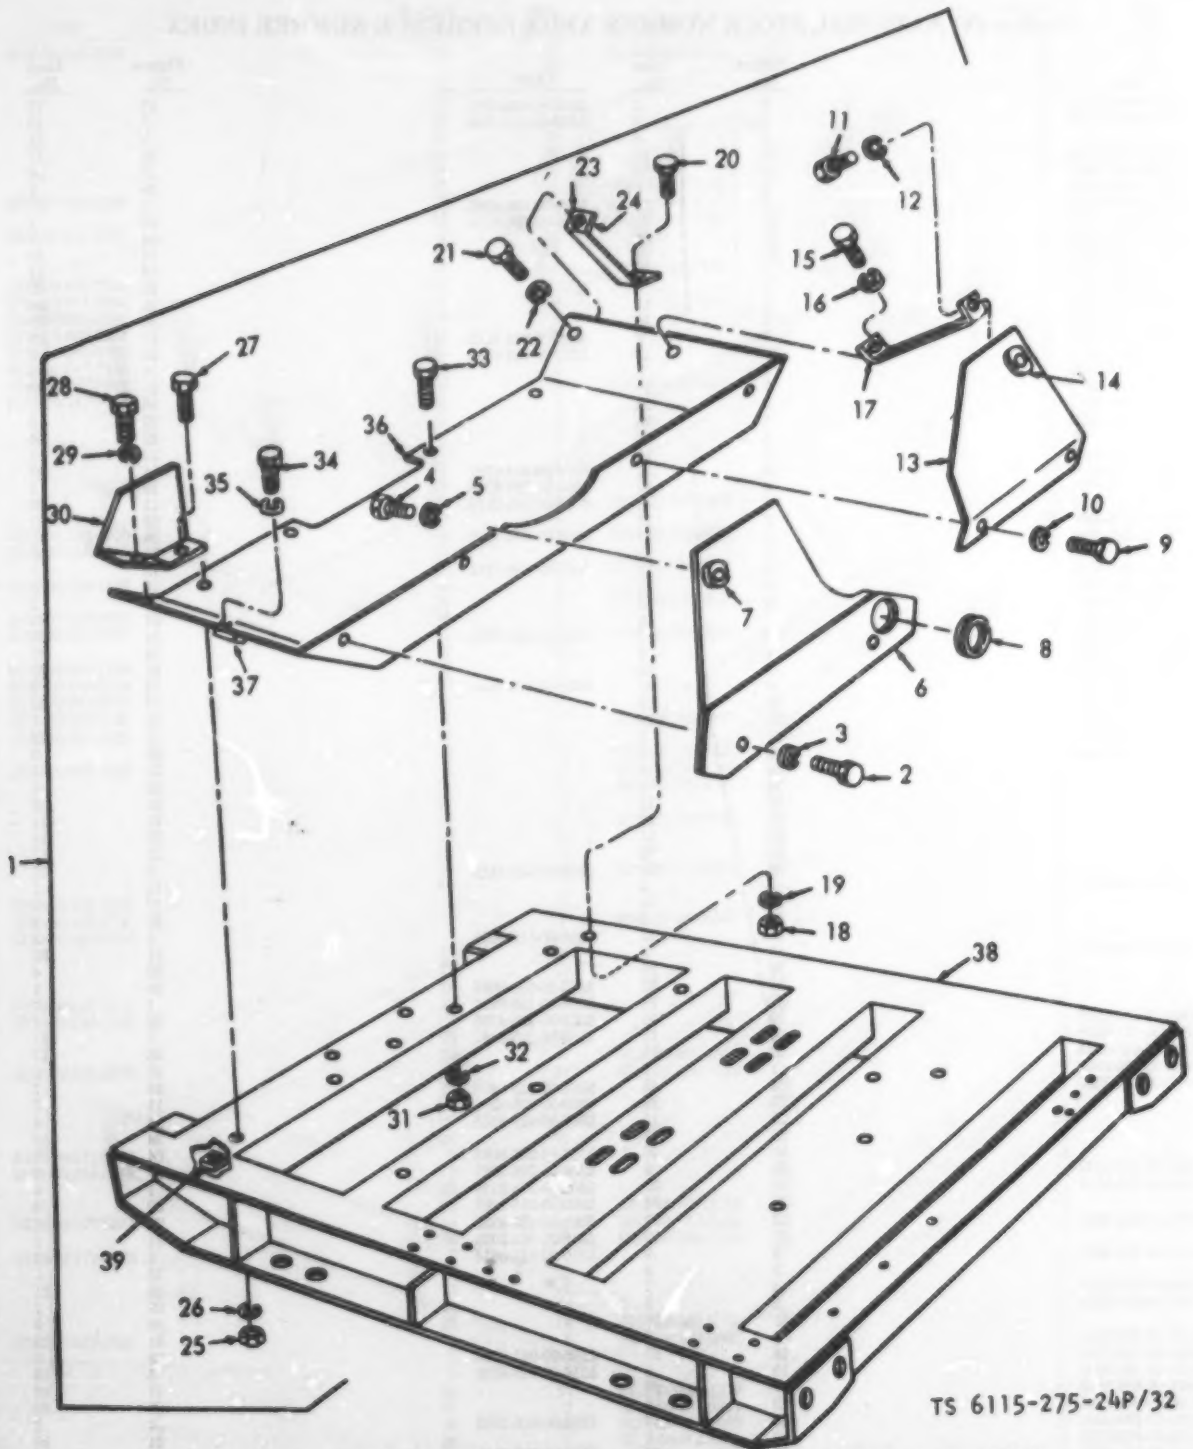

Figure 32. Skid frame, drip pan and brackets, (Model MEP-023A).

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No.	Item No.
2910-00-066-1235	6	1
2910-00-905-9792	9A	8
	8	2
2920-00-021-3334	11	15
2920-00-021-3337	11	19
2990-00-056-4628	1	9
2990-00-995-1104	2	10
3110-00-141-9558	23	24
3110-00-227-2652	23	21
3110-00-585-3296	24	22
4010-00-267-9618	4	13
4010-00-554-8661	3	4
4030-00-801-5342	4	11
4330-00-025-3493	7	22
4710-00-923-0406	7	2
4710-00-941-1491	10	12
4720-00-015-2539	5	8
4720-00-056-3693	7	10
4720-00-289-9197	4	14
4720-00-913-6422	1	13
	3	12
4730-00-022-2499	1	15
4730-00-188-3515	1	11
4730-00-253-0631	3	10
4730-00-277-5115	6	3
4730-00-278-4603	1	16
4730-00-497-4281	4	17
4730-00-640-6330	9	15
4730-00-800-9869	4	12
4730-00-842-2201	4	15
4730-00-950-8827	9	8
4730-00-950-8831	9	12
4820-00-136-1085	3	7
4820-00-142-2663	3	5
4820-00-729-6132	7	23
4820-00-930-6624	9	16
5305-00-015-4964	18	15
5305-00-018-0034	24	29
5305-00-042-6417	31	3
5305-00-068-0498	32	2
	32	4
	32	9
	32	11
	32	15
	32	21
	32	28
	32	34
5305-00-068-0501	2	2
	16	11
	26	3
	26	13
5305-00-068-0502	9	5
	32	20
	32	27
	32	33
5305-00-071-2237	30	10
5305-00-071-2238	24	12
5305-00-088-9044	19	13
5305-00-115-9526	1	7
5305-00-175-3250	24	45
	25	24
	26	15
	29	13
	30	16
5305-00-225-3839	28	8
5305-00-253-5614	14	20
	29	24
5305-00-253-5615	22	11
	27	10
5305-00-253-5621	9	9
	3	3
5305-00-269-3211	4	7
5305-00-269-3213	2	9
	31	10
5305-00-269-3214	31	7
5305-00-685-1344	15	21
5305-00-889-2997	19	9
5305-00-889-2999	17	27
5305-00-889-3000	29	18
5305-00-889-3001	20	27
5305-00-889-3116	20	9
5305-00-957-6265	17	22
5305-00-983-6730	13	42
5305-00-984-4983	14	47
	20	18
5305-00-984-4984	17	17
5305-00-984-4988	7	18
	7	21
	15	17
	17	20
	19	4
5305-00-984-4993	5	17
5305-00-984-6191	14	1
	14	7
	14	16
	14	74
	15	22
	15	26
	24	39
5305-00-984-6192	17	28
5305-00-984-6193	13	5
	14	33
	15	36
	16	5
	22	8
	22	14
	24	1
5305-00-984-6197	14	40
5305-00-984-6208	19	1
5305-00-984-6210	14	70
	29	21
5305-00-984-7852	26	11
	31	17
5305-00-989-7434	13	1
	13	9
	16	2
	24	14
5305-00-989-7435	14	27
	14	37
	21	25
5305-00-990-6444	14	4
	17	35
	18	1
	18	12
	20	3
	21	1
	21	5
	21	8
	21	11
	21	14
	21	17
5305-00-993-1848	5	13
	11	1
	17	9
	23	1
5306-00-018-0078	5	5
	11	32
	28	4
5306-00-018-0087	30	1
5306-00-150-9221	1	3
5306-00-196-4735	22	4
5306-00-225-8497	7	31
	26	17
	30	6
5306-00-225-8498	24	7
5306-00-225-8502	11	7
5306-00-225-8503	24	4
	24	16
5306-00-225-9061	24	9
5306-00-226-4827	23	6
5306-00-274-2119	1	4
5306-00-616-1287	30	8
5306-00-726-4835	23	18
5310-00-004-3089	31	1
5310-00-012-0614	5	11
	16	1
	19	11
	20	1
	26	9
	31	15
5310-00-013-4524	19	7
5310-00-013-4530	5	15
	17	19
	20	24
5310-00-016-7922	24	8
	24	10
5310-00-017-4916	30	14
5310-00-019-0669	15	49
5210-00-022-8834	29	10
5310-00-042-4229	13	27
5310-00-044-6230	31	4

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No.	Item No.
5310-00-045-3296	5	12
	7	29
	11	2
	14	72
	19	14
	24	15
	24	30
	26	10
	31	16
5310-00-045-3299	15	23
	24	2
5310-00-045-4007	5	16
	14	48
	16	6
5310-00-045-5210	29	11
5310-00-061-0004	17	8
5310-00-061-7226	1	2
5310-00-080-6004	14	67
5310-00-080-9786	16	3
5310-00-087-7493	11	8
5310-00-167-0662	22	5
5310-00-167-0721	10	7
	11	6
	12	8
	23	5
	23	7
	23	11
	23	19
	25	4
5310-00-184-8970	15	32
5310-00-186-7358	17	2
	21	22
5310-00-194-1483	22	2
	25	2
5310-00-209-0786	18	22
5310-00-209-0788	17	18
	18	16
5310-00-209-1239	6	5
5310-00-245-3424	10	8
5310-00-261-8278	23	29
5310-00-286-8124	7	25
5310-00-337-8329	17	37
	18	8
5310-00-407-9566	5	4
	11	31
	24	5
	24	17
	26	18
	28	3
	30	2
	30	7
5310-00-409-2561	6	8
5310-00-483-8790	4	6
5310-00-483-8792	7	24
	27	2
	27	12
	29	3
5310-00-543-2410	17	25
5310-00-550-1130	18	21
	25	16
	25	18
5310-00-559-0070	14	34
	17	3
	22	9
	22	15
	24	40
5310-00-571-5090	6	7
5310-00-576-5752	1	5
	23	2
	29	22
5310-00-577-5354	13	13
	18	25
5310-00-579-0079	7	19
	7	22
	14	45
	20	25
	29	19
5310-00-582-5965	2	3
	2	3
	9	4
	24	13
	26	2
	26	14
	28	7
	30	11
	32	5
	32	10
	32	12

NSN	Figure No.	Item No.
5310-00-582-5965	32	12
	32	16
	32	19
	32	22
	32	26
	32	29
	32	32
	32	35
5310-00-584-5272	31	2
5310-00-595-7237	1	8
5310-00-595-7421	25	10
	29	1
	29	15
5310-00-596-7691	17	36
	18	2
	18	13
	19	2
	19	12
	20	2
	21	2
5310-00-596-7691	21	6
	21	9
	21	12
	21	15
	21	18
	21	23
	21	26
5310-00-596-7693	17	30
	19	5
5310-00-616-3554	19	8
	20	10
5310-00-637-9541	2	8
	31	11
5310-00-732-0558	2	7
	31	5
5310-00-761-6882	9	3
	26	1
	28	6
	30	13
	32	18
5310-00-761-6882	32	25
	32	31
5310-00-782-6233	28	2
5310-00-782-1349	18	20
5310-00-802-4701	11	24
	30	5
5310-00-809-4058	15	45
	16	12
	29	5
5310-00-809-5998	14	68
	25	12
	29	16
5310-00-809-8544	13	4
	14	8
	14	17
	14	26
	14	41
	14	75
	15	24
	15	27
5310-00-809-8544	15	37
5310-00-809-8546	7	30
	13	2
	13	8
	14	2
	14	5
	14	28
	14	38
	14	71
5310-00-828-8189	10	3
5310-00-851-2682	26	8
5310-00-880-7744	5	3
	11	5
	11	23
	11	30
	30	4
5310-00-934-9739	17	24
5310-00-934-9757	17	1
	17	7
	17	29
5310-00-950-1310	17	26
5310-00-951-4679	13	41
5310-00-951-7209	29	7
5310-00-983-8483	14	26
	15	14
	15	18
5315-00-010-3385	4	5
5315-00-256-794	23	43

Reproduced from poor document.

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No.	Item No.
5315-00-616-5514	24	21
5315-00-990-2630	23	41
5320-00-117-6862	14	12
5320-00-119-6754	30	19
5320-00-242-0322	23	36
5320-00-903-6767	26	5
5325-00-016-2352	29	6
5325-00-290-2906	13	10
5325-00-290-3972	17	38
5325-00-543-3237	17	34
5325-00-938-5669	18	9
5330-00-021-3339	11	9
5330-00-031-3340	3	11
5330-00-056-8066	1	10
	2	11
5330-00-065-8553	14	18
5330-00-298-7165	4	4
5330-00-522-1880	3	2
5340-00-016-2362	5	18
5340-00-016-2365	5	14
5340-00-359-5269	24	23
5340-00-670-1223	26	12
	31	18
5340-00-854-6730	4	9
5340-01-071-3831	7	5
5905-00-021-3345	20	4
5905-00-021-3346	20	12
5905-00-021-3347	20	13
5905-00-021-3348	20	14
5905-00-021-3349	20	15
5905-00-021-3352	17	55
5905-00-050-1674	20	5
5905-00-050-1701	15	42
	21	24
5905-00-065-8594	17	56
5905-00-643-5129	13	36
5910-00-577-1348	21	7
5910-00-577-1349	21	10
	21	13
	21	16
5920-00-646-4631	14	36
5925-00-051-2003	18	17
5925-00-109-2231	15	15
5925-00-493-1881	15	25
5930-00-044-5090	19	22
5930-00-065-5302	13	37
5930-00-259-4646	13	35
	17	52
5930-00-538-5508	17	49
5930-00-615-9376	13	31
	17	46
5930-00-655-1514	13	33
	17	60
5930-00-655-1518	13	32
	17	47
5930-00-655-1582	13	30
	17	45
5930-00-685-9521	15	16
	20	7
5930-00-832-5174	17	51
5930-01-114-9243	19	15
5935-00-016-2477	22	16
5935-00-021-3322	19	10
5935-00-021-3350	20	23
5935-00-206-1400	14	50
5935-00-564-1355	14	19
5940-00-082-4861	21B	10
5940-00-114-1314	3	6
5940-00-143-5284	14	50
	14	64
5940-00-204-8966	20	6
	24	35
5940-00-401-9856	11	12
	28	
5940-00-557-1629	17	5
	17	11
	17	14
5940-00-557-1631	14	51
5940-00-557-4338	11	21
5940-00-557-4339	14	56
	15	3
	15	7
	15	11
5940-00-557-4340	27	7
5940-00-655-3318	9	11
5940-00-660-3631	17	15
5940-00-738-6272	10	13
5940-00-804-0515	14	55
	15	2
	15	6
	15	10
	29	12
5940-00-904-9634	18	28
5940-00-943-7740	14	53
5940-01-030-4348	20	20
5945-00-066-7076	14	49
5945-00-435-1533	15	38
5950-00-787-9615	21	28
5950-00-910-9381	24	33
5961-00-225-9123	15	54A
5961-00-712-5578	21A	20
	14	52
5961-00-953-5138	14	57
	27	
5970-00-250-3028	20	17
5970-00-991-9327	14	15
5975-00-235-4635	15	54
6110-00-764-7621	21	29
	16	13
6110-00-938-5676	13	20
6115-00-016-2360	30	15
6115-00-021-3321	16	4
6115-00-021-3326	22	13
6115-00-056-4596	12	1
6115-00-056-4598		
	14	69
6115-00-056-4599	23	27
6115-00-056-4634	12	6
6115-00-065-5262	24	28
6115-00-066-2437	1	1
6115-00-066-4933	14	43
6115-00-245-7693	23	16
6115-00-402-2080	19	6
6115-00-659-2786	2	1
6115-00-760-5458	5	1
6115-00-914-7303	15	55
6115-00-924-8170	23	12
6115-00-930-8922	24	37
6115-00-936-8134	24	24
6115-00-938-5677	24	3
6115-00-938-5678	14	22
6115-00-940-0175	23	44
6115-00-940-7859	22	3
6115-00-945-7039	13	17
6115-00-949-0400	24	6
6115-00-997-4466	20	16
6130-00-070-8887	10	5
6140-00-059-3528	11	28
	11	4
6140-00-923-4472	10	1
6140-00-923-4476	10	2
6140-00-945-9032	27	
6145-00-174-1108	27	
	14	61
6145-00-184-5490	14	65
	11	14
6145-00-538-8219	17	6
6145-00-548-2718	17	12
	17	16
	12	5
6145-00-578-6602	15	41
6145-00-643-0657	27	4
6150-00-016-2361	11	11
6150-00-021-3332	24	19
6150-00-930-2539	17	58
6210-00-065-5260	17	43
6620-00-056-9584	13	28
6620-01-017-8765	17	63
6625-00-045-7625	13	44
6625-00-054-2038	13	45
6625-00-065-5258	13	43
6625-00-065-5301	17	61
	13	29
6625-00-066-1278	17	44
6625-00-066-1728	17	62
6625-00-893-9000	13	39
6240-00-155-8707	17	59
6240-00-155-8714	17	42
6645-00-059-8842	4	3
7240-00-025-3377	4	2
7240-00-222-3088	9A	7
9505-00-603-4120	8	1
	25	25
9905-00-450-9121		

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
AN3-3A	88044	1	3
AN3-5A	88044	1	4
AN816-5B	88044	9	13
AN816-5-4	88044	6	3
AN817-5	88044	7	3
AN817-5	88044	7	7
B13211E4792	97403	9A	1
B13211E6751	97403	9A	5
CA36KFW103	81349	21	10
	81349	21	13
	81349	21	16
CA37KFW103	81349	21	7
C13211E4924	97403	9A	2
C13211E4925	97403	9A	3
C13211E6750	97403	9A	16
C13214E7665	97403	9A	19
C13214E7666	97403	9A	20
C13218E0290-2	97403	9A	10
C13218E8062-1	97403	9A	6
	97403	9A	12
C13218E8062-2	97403	9A	11
ERJB200	81336	1	17
FF-E-588 TYPE 2 CLASS 1	81348	22	4
FFW92	81348	18	20
F61C500V15A	81349	14	36
MILC1283B	81349	4	2
	81349	5	2
MILG432	81349	4	4
MILH8794-5	81349	4	14
	81349	4	18
	81349	5	10
	96906	7	13
	81349	9	
MILI3190CL130TYBCATA-106 ID	81349	23	32
MILI3190CL130TYBCATA-186 ID	81349	23	33
MIL-T-55155/12-4,SE12XC04	81349	21B	10
MILT55155-20	96906	20	11
MILW16878-7	81349	23	
MILW5086	81349	12	5
MILY1140	81349	16	10
MIL13190	81349	12	4
MS15671-4	96906	17	59
MS15671-6	96906	13	39
MS157-5-607	96906	17	2
MS15795-607	96906	21	22
MS15795-608	96906	23	30
MS15795-610	96906	15	30
MS15795-618	96906	13	14
	96906	15	50
MS15795-813	96906	11	24
	96906	30	5
MS15795-910	96906	29	11
MS16535-135	96906	25	21
MS16535-164	96906	23	36
MS16624-150	96906	23	26
MS16997-142	96906	25	1
MS16997-83	96906	25	3
MS17122-15	96906	14	51
MS17122-7	96906	13	25
MS17172-3	96906	23	39
MS17311-1	96906	3	4
	96906	9	10
MS17829-4C	96906	7	24
	96906	27	2
	96906	27	12
	96906	29	3
MS17829-5C	96906	10	8
MS17829-6C	96906	4	6
MS17829-9C	96906	25	10
	96906	29	1
	96906	29	15
MS19067A06	96906	23	22
MS19067A07	96906	23	14
MS19069A06	96906	23	23
MS19069A07	96906	23	15
MS20066-23	96906	23	13
MS20066-252	96906	23	41
MS20066-254	96906	23	17
MS20066-256	96906	23	43
MS20066-264	96906	23	45
MS20364-832	96906	13	3
	96906	13	7
MS20364-832	96906	14	23
MS20426D3-4	96906	17	33
MS20426D4-5	96906	17	40
MS20470AD2-3	96906	30	19
MS20470D4-4	96906	14	12
MS20470D4-6	96906	13	18
MS20659-41	96906	9	11
MS20659-129	96906	3	6
MS20822-5-4B	96906	9	14
MS20825-5	96906	7	16
MS20913-1J		9A	9
MS20913-4	96906	1	11
MS20995C41	96906	9A	7
MS20995F32	96906	23	
MS21045-3		1	2
MS21265-3N	96906	25	9
MS21318	96906	14	20
MS21318-14	96906	24	45
	96906	25	24
	96906	26	15
MS21318-14	96906	29	13
	96906	30	16
MS21318-20	96906	9A	18
	96906	29	24
MS21318-21	96906	22	11
	96906	27	10
MS21318-30	96906	3	3
	96906	9	9
MS21333-101	96906	11	3
MS21333-124	96906	4	9
	96906	25	6
MS21333-73	96906	19	3
MS21727-5	96906	31	14
MS24392-5	96906	4	12
MS24587-5	96906	4	15
	96906	4	17
	96906	5	9
	96906	9	
MS24662-3	96906	18	4
	96906	18	10
MS24662-3	96906	19	20
	96906	21	30
MS24662-5	96906	26	5
MS25002-1	96906	17	49
MS25002-2	96906	17	52
MS25036-115	96906	13	
	96906	14	59
	96906	14	64
	96906	15	
MS25036-116	96906	15	
MS25036-126	96906	13	
	96906	14	56
	96906	15	3
	96906	15	7
	96906	15	11
MS25036-127	96906	10	
	96906	11	16
	96906	11	20
	96906	28	
MS25036-128	96906	13	
MS25036-128	96906	14	55
	96906	15	2
	96906	15	6
	96906	15	10
MS25036-2	96906	20	6
	96906	24	35
MS25036-27	96906	27	7
MS25281-4	96906	14	76
MS25281-5	96906	14	24
MS25281-6	96906	14	77
MS25281-10	96906	14	78
MS27183-10	96906	9A	17
	96906	15	45
	96906	16	12
	96906	29	5
MS27183-13	96906	11	8
MS27183-14	96906	14	67
MS27183-18	96906	14	68
	96906	25	12
	96906	29	16
MS27183-22	96906	29	7
MS27183-3	96906	13	41
MS27183-4	96906	17	26
MS27183-5	96906	14	46
	96906	15	14
	96906	15	18

best copy available
Reproduced from poor document.

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
MS27183-7	96906	13	4
	96906	14	8
	96906	14	17
	96906	14	26
	96906	14	41
	96906	14	7
	96906	15	24
	96906	15	27
	96906	15	37
MS27183-8	96906	7	30
	96906	13	2
	96906	13	8
	96906	14	2
	96906	14	5
	96906	14	28
	96906	14	38
	96906	14	71
MS28741-5-0360	96906	9	2
MS28741-5-0440	96906	5	8
MS29513-125	96906	8	2
MS3106F20-7S	96906	12	3
MS3108E18-1P	96906	12	2
MS3367-1-9	96906	15	
MS35026-228	96906	15	13
MS35058-22	96906	13	33
	96906	17	60
MS35058-27	96906	13	32
	96906	17	47
MS35059-21	96906	13	31
	96906	17	46
MS35059-23	96906	13	30
	96906	17	45
MS35059-30	96906	15	16
	96906	20	7
MS35190-28	96906	14	14
MS35190-234	96906	17	22
MS35191-278	96906	26	11
	96906	31	17
MS35206-213	96906	20	9
MS35206-215	96906	19	9
MS35206-217	96906	17	27
MS35206-218	96906	13	42
MS35206-226	96906	14	47
	96906	20	18
MS35206-227	96906	17	17
MS35206-228	96906	7	18
	96906	7	21
	96906	15	17
	96906	17	20
	96906	19	4
MS35206-230	96906	29	18
MS35206-231	96906	20	27
MS35206-233	96906	5	17
MS35206-243	96906	14	1
	96906	14	7
	96906	14	16
	96906	14	74
	96906	15	22
	96906	15	26
	96906	24	39
MS35207-244	96906	17	28
MS35206-245	96906	13	5
MS35206-245	96906	14	25
	96906	14	33
	96906	15	36
	96906	16	5
	96906	22	8
	96906	22	14
	96906	24	1
MS35206-249	96906	14	40
MS35206-261	96906	19	1
MS35206-263	96906	14	70
	96906	29	21
MS35207-260	96906	19	13
MS35207-261	96906	14	4
	96906	17	35
	96906	18	1
	96906	18	12
	96906	20	3
	96906	21	1
	96906	21	5
	96906	21	8
	96906	21	11
	96906	21	14
	96906	21	17
MS35207-263	96906	13	1

Reference Number	FSCM	Fig. No.	Item No.
MS35207-263	96906	13	9
	96906	16	2
	96906	24	14
MS35207-264	96906	14	27
	96906	14	37
	96906	21	25
MS35207-265	96906	5	13
	96906	11	1
	96906	17	9
	96906	23	1
MS35291-111	96906	22	1
MS35291-113	96906	25	11
MS35291-12	96906	29	4
MS35291-31	96906	12	7
MS35291-32	96906	10	9
MS35291-38	96906	23	4
MS35291-58	96906	1	7
	96906	14	66
MS35291-6	96906	7	26
	96906	15	46
	96906	25	17
	96906	27	15
MS35291-60	96906	23	13
MS35291-8	96906	27	3
MS35297-12	96906	24	29
MS35297-32	96906	30	8
MS35297-33	96906	5	5
	96906	11	32
MS35297-40	96906	28	4
MS35297-6	96906	30	1
MS35333-105	96906	24	25
MS35333-108	96906	15	49
MS35333-113	96906	29	10
MS35333-33	96906	18	27
MS35333-37	96906	18	22
MS35333-37	96906	7	19
	96906	7	22
	96906	14	45
	96906	20	25
	96906	29	19
MS35333-38	96906	14	34
	96906	17	3
	96906	22	9
	96906	22	15
MS35333-39	96906	1	5
	96906	23	2
	96906	29	22
MS35333-40	96906	18	21
	96906	25	16
	96906	25	18
MS35333-41	96906	10	7
	96906	11	6
	96906	12	8
	96906	23	5
	96906	23	7
	96906	23	11
MS35333-41	96906	23	19
	96906	25	4
MS35333-42	96906	1	8
MS35333-44	96906	22	2
	96906	25	2
MS35333-91	96906	15	33
MS35333-96	96906	15	51
MS35335-29	96906	19	8
	96906	20	10
MS35335-30	96906	17	15
	96906	18	16
	96906	20	19
MS35335-31	96906	17	30
	96906	19	5
MS35335-32	96906	17	36
	96906	18	2
	96906	18	13
	96906	19	2
	96906	19	12
	96906	20	2
MS35335-32	96906	21	2
	96906	21	6
	96906	21	9
	96906	21	12
	96906	21	15
	96906	21	18
	96906	21	23
	96906	21	28

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
MS35335-60	96906	6	5
MS35337-43	96906	22	5
MS35338	96906	24	40
MS35338-100	96906	23	29
MS35338-101	96906	15	32
MS35338-105	96906	13	13
	96906	18	25
MS35338-40	96906	17	25
MS35338-41	96906	5	16
	96906	14	48
	96906	16	6
MS35338-42	96906	15	23
	96906	24	2
MS35338-43	96906	5	12
	96906	7	29
	96906	11	2
	96906	14	72
	96906	19	14
	96906	24	15
	96906	24	30
MS35338-43	96906	26	10
	96906	31	16
MS35338-44	96906	2	3
	96906	9	4
	96906	9A	14
	96906	24	13
	96906	25	2
	96906	26	14
	96906	28	7
	96906	30	11
	96906	32	5
	96906	32	10
	96906	32	12
	96906	32	16
	96906	32	19
	96906	32	22
	96906	32	26
	96906	32	29
	96906	32	32
	96906	32	35
MS35338-45	96906	5	4
	96906	11	31
	96906	24	5
	96906	24	17
	96906	26	18
	96906	28	3
	96906	30	2
	96906	30	7
MS35338-46	96906	2	8
	96906	31	11
MS35338-48	96906	31	2
MS35425-41	96906	10	3
MS35490-19	96906	32	8
MS35648-82	96906	21	21
MS35649-102	96906	7	28
MS35649-2252	96906	9A	13
MS35649-242	96906	17	24
MS35649-282	96906	17	1
	96906	17	7
	96906	17	29
	96906	19	7
MS35649-42	96906	5	15
MS35649-62	96906	17	19
	96906	20	21
	96906	20	24
	96906	5	11
MS35650-102	96906	16	1
	96906	19	11
	96906	20	1
	96906	26	9
	96906	31	15
MS35650-105	96906	23	28
MS35690-411	96906	15	31
	96906	29	9
MS35690-502	96906	10	6
MS35691-17	96906	26	8
MS35691-811	96906	13	12
	96906	15	48
	96906	24	21
MS35756-6	96906	17	41
MS35823-1A	96906	18	7
MS39162-4	96906	9A	4

Reference Number	FSCM	Fig. No.	Item No.
MS45904-57	96906	17	8
MS45904-60	96906	16	3
MS45904-68	96906	30	14
MS51017-82	96906	23	8
MS51085	96906	7	32
MS51086-1	96906	9A	8
MS51086-335	96906	23	10
MS51107-85	96906	22	18
MS51967-14	96906	31	1
MS51967-2	96906	9	3
	96906	26	1
	96906	28	6
	96906	30	13
	96906	32	18
	96906	32	25
	96906	32	31
MS51967-5	96906	5	3
MS51967-5	96906	11	5
	96906	11	23
	96906	11	30
	96906	28	2
	96906	30	4
MS51967-8	96906	2	7
	96906	31	5
	96906	10	5
MS78047-1	96906	32	2
MS90725-1	96906	32	4
	96906	32	9
	96906	32	11
	96906	32	15
	96906	32	21
	96906	32	28
	96906	32	34
MS90725-113	96906	31	3
MS90725-13	96906	24	12
MS90725-14	96906	30	10
MS90725-32	96906	7	31
MS90725-32	96906	26	17
	96906	30	6
MS90725-33	96906	24	7
MS90725-36	96906	24	9
MS90725-38	96906	11	7
MS90725-39	96906	24	4
	96906	24	16
MS90725-5	96906	2	2
	96906	16	11
	96906	26	3
	96906	26	13
MS90725-6	96906	9	5
	96906	32	20
	96906	32	27
	96906	32	33
MS90725-60	96906	4	7
MS90725-62	96906	2	9
MS90725-62	96906	31	10
MS90725-64	96906	31	7
MS90725-8	96906	9A	15
MS90725-8	96906	28	8
MS90728-34	96906	23	6
MS90728-42	96906	23	18
MS91528	96906	17	48
MS91528-1K2B	96906	13	34
MS91528	96906	17	50
	96906	17	54
M13486-1-12 TYPE I 2 AWG	81349	10	
M13486-1-12, TYPE I 2 AWG	81349	11	
M13486-1-12, TYPE I, 2 AWG	04700	11	18
M13486-1-12, TYPE I, 2 AWG	81349	11	22
M13486-1-12, TYPE 2 4 AWG	81349	11	14
M22-08-00191FD	81349	13	36
	81349	17	56
M5086-1-18-9	81349	15	
M5086-2-2-9	81349	13	
	81349	28	
M5086-2-8-9	81349	13	
	81349	15	
M50861-2-18-9	81349	15	41

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
M50861-2-2-9	81349	14	57
	81349	15	4
	81349	15	8
	81349	15	12
M50861-2-8-9	81349	14	61
	81349	14	65
NAS1090-1	80205	4	11
NAS1455-00-8C	80205	4	13
NAS671B6	80205	14	44
NPN	19099	4	5
	19099	15	9
	19099	15	21
	19099	15	29
	19099	17	4
	19099	17	10
	19099	17	13
	19099	21	19
	19099	22	4
	19099	23	9
	19099	27	
NPN	19099	27	5
	19099	27	6
	19099	27	8
RN70D1742F	81349	20	15
RN70D4321F	81349	20	13
RN70D7681F	81349	20	14
RN70D9091F	81349	20	12
SE12XC04	81349	21B	10
WW-N-351	81349	3	8
WW-P-471	81349	3	5
WW-P-521	81349	3	9
ZB1030	76385	29	6
10-37090-363	77820	24	42
102B502	44940	3	1
102P582	44940	3	11
13200E6140	97403	25	20
13200E6140-1	97403	25	22
13200E6140-2	97403	25	23
13200E6361	97403	6	7
13200E6363	97403	6	6
13208E5820	97403	15	52
13208E5820-6	97403	29	12
13211E4775	97403	15	53
13211E4776	97403	14	9
13211E4777	97403	15	47
13211E4778	97403	15	28
13211E4779	97403	15	35
13211E4780	97403	15	56
13211E4781	97403	23	20
13211E4782	97403	23	16
13211E4784	97403	23	42
13211E4785	97403	14	6
13211E4787	97403	23	46
13211E4788	97403	22	10
13211E4792	97403	7	9
13211E4797	97403	14	3
13211E4798	97403	14	31
13211E4799	97403	14	32
13211E4800	97403	23	25
13211E4801	97403	25	5
13211E4802	97403	29	17
13211E4803	97403	25	15
13211E4804	97403	22	12
13211E4806	97403	27	11
13211E4807	97403	29	25
13211E4808	97403	14	73
13211E4809	97403	15	19
13211E4810	97403	14	13
13211E4813	97403	14	29
13211E4814	97403	7	14
13211E4815	97403	25	25
13211E4816	97403	13	37
13211E4817	97403	25	14
13211E4818	97403	13	35
13211E4819	97403	13	46
13211E4821	97406	15	34
13211E4822	97403	14	53
13211E4824	97403	14	43
13211E4825	97403	14	39
13211E4826	97403	14	52
13211E4828	97403	14	50
13211E4829	97403	15	42
	97403	21	24
13211E4830	97403	13	17
13211E4838	97403	14	69
13211E4839	97403	15	15
13211E4842	97403	13	10
13211E4843	97403	13	11
13211E4845	97403	14	11
13211E4846	97403	14	30
13211E4848	97403	13	6
13211E4849	97403	13	20
13211E4849-2	97403	13	22
13211E4849-3	97403	13	24
13211E4849-4	97403	13	21
13211E4849-5	97403	13	23
13211E4850	97403	13	26
13211E4852	97403	15	38
13211E4854-5	97403	15	20
13211E4855-1	97403	15	29
	97403	15	44
13211E4855-3	97403	13	40
13211E4856	97403	15	25
13211E4857	97403	14	35
	97403	15	
13211E4857-1	97403	22	16
13211E4857-2	97403	21	20
13211E4858-1	97403	13	16
	97403	14	54
	97403	15	1
13211E4858-2	97403	15	5
13211E4858-4	97403	13	15
	97403	14	58
	97406	14	62
13211E4861	97403	12	9
13211E4863	97403	14	10
13211E4864-2	97403	15	
13211E4864-3	97403	15	
	97403	15	40
13211E4864-7	97403	13	
	97403	14	60
	97403	14	63
13211E4866	97403	22	20
13211E4868	97403	22	19
13211E4869	97403	23	27
13211E4869-3	97403	23	34
13211E4869-4	97403	23	35
13211E4869-6	97403	23	31
13211E4870	97403	1	9
13211E4873	97403	1	6
13211E4874	97403	22	17
13211E4876	97403	7	6
13211E4876-1	97403	7	8
13211E4878	97403	7	2
13211E4878-1	97403	7	4
13211E4879	97403	23	47
13211E4879-1	97403	23	49
13211E4879-2	97403	25	48
13211E4880	97403	22	3
13211E4881	97403	25	8
13211E4882	97403	25	7
13211E4883	97403	29	8
13211E4884	97403	15	55
13211E4886	97403	10	4
13211E4887	97403	7	27
13211E4888	97403	27	14
13211E4889-1	97403	5	18
	97403	29	20
13211E4889-2	97403	29	23
13211E4890	97403	29	1
	97403	29	2
13211E4892	97403	10	10
13211E4893	97403	10	11
13211E4894	97403	23	44
13211E4895	97403	22	13
13211E4896	97403	29	26
13211E4899	97403	12	1
13211E4900	97403	23	12
13211E4903	97403	25	19
13211E4911	97403	10	12
13211E4912	97403	27	4
13211E4913	97403	12	6
13211E4914	97403	1	12

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
13211E4914	97403	3	13
13211E4915	97403	1	14
13211E4916	97403	1	16
13211E4918	97403	1	13
	97403	3	12
13211E4919	97403	1	15
13211E4921	97403	4	8
13211E4924	97403	7	10
13211E4924-2	97403	7	11
13211E4924-3	97403	7	12
13211E4925	97403	4	16
13211E4927	97403	7	20
13211E4928	97403	7	15
13211E4929	97403	23	3
13211E4930	97403	7	5
13211E4936	97403	7	1
13211E6361	97403	6	7
13211E6702	97403	26	12
	97403	31	18
13211E6705	44940	28	12
	97403	27	9
13211E6706	97403	11	12
13211E6712	97403	11	10
13211E6713	97403	11	9
13211E6716-1	97403	2	6
	97403	32	7
	97403	32	14
	97403	32	24
	97403	32	37
13211E6716-3	97403	32	39
13211E6720	97403	5	14
13211E6721	97403	31	9
13211E6722	44940	32	23
13211E6723	97403	32	17
13211E6724	44940	32	13
13211E6726-2	97403	31	13
13211E6730	97403	29	14
	97403	30	17
13211E6735	97403	30	18
13211E6741	97403	3	10
13211E6742	97403	3	7
13211E6744	97403	3	2
13211E6746	97403	2	5
13211E6747	97403	2	4
13211E6750	97403	9	16
13211E6751	97403	9	8
13211E6752	97403	9	12
13211E6756	97403	9	15
13211E6761	97403	26	4
13211E6763	97403	11	25
13211E6765	97403	26	7
13211E6769		1	1
13211E6771	97403	28	1
13211E6773	97403	1	10
	97403	2	11
13211E6802	97403	24	32
13211E6807	97403	24	22
13211E6828	97403	24	28
13211E6831	97403	24	38
13211E6837	97403	30	3
13211E6839	97403	24	41
13211E6840-1	97403	19	10
13211E6850	97403	30	12
13211E6851	97403	24	19
13211E6853	97403	24	11
13211E6854	97403	24	18
13211E6855	97403	24	8
	97403	24	10
13211E6856	97403	24	26
13211E6858	97403	16	4
13211E6864	97403	24	31
13211E6877	97403	17	39
13211E6879-3	97403	19	17
	97403	19	19
	97403	21	4
13211E6882	97403	17	34
13211E6886	97403	18	9
13211E6887	97403	17	37
	97403	18	8
13211E6888	97403	18	5
13211E6888-3	97403	14	21
13211E6891	97403	14	18
13211E6892	97403	14	19
13211E6894	97403	15	43
	97403	21	28
13211E6895	97403	21	27
13211E6901	97403	14	22
13211E6904	97403	17	21
13211E6905	97403	13	43
	97403	17	61
13211E6908	97403	30	15
13211E6913	97403	17	23
13211E6914	97403	17	38
13211E6918	97403	23	29
	97403	17	44
13211E6919	97403	13	45
	97403	17	62
13211E6920	97403	13	38
	97403	17	58
13211E6927	97403	17	31
13211E6929	97403	17	43
13211E6931	97403	17	51
13211E6934-1	97403	17	57
13211E6934-2	97403	17	53
13211E6936	97403	20	4
13211E6938	97403	20	29
13211E6939	97403	20	28
13211E6940	97403	20	26
13211E6941	97403	20	23
13211E6942	97403	20	22
13211E6944	97403	14	49
	97403	20	20
13211E6947	97403	20	16
13211E6949	97403	20	8
13211E6985	97403	17	32
13211E6992-1	97403	13	44
13211E6992-2	97403	17	63
13211E6994	97403	11	13
13211E6995-1	97403	31	6
	97403	31	8
13211E6996	97403	11	3
13211E7541	97403	6	1
13211E7542	97403	6	2
13211E7543	97403	6	11
13211E7544	97403	6	10
13211E7545	97403	6	4
13211E7546	97403	6	9
13211E7547	97403	6	8
13211E7548	97403	6	12
13211E9633	97403	17	55
13212E3613	97403	4	1
	97403	5	1
13212E8933	97403	19	6
13212E9780	97403	14	15
13212E9783-1	97403	23	24
13212E9783-2	97403	23	21
13213E3925	97403	23	37
13213E3926	97403	23	38
13213E3926-1	97403	23	40
13213E3928	97403	11	4
13213E3929	97403	10	2
	97403	11	15
13213E3930	97403	10	1
	97403	11	19
13213E3934	97403	13	19
13213E3949	97403	18	28
13214E0209	97403	24	23
13214E7670	97403	9A	
13215E2282	97403	14	42
13215E2283	97403	22	6
13215E2285	97403	22	7
13216E1902	97403	32	1
13216E1903	97403	32	38
13216E1904	97403	32	6
13216E1905	97403	32	36
13216E1906	97403	5	7
13216E1907	97403	31	12
13216E1908	97403	28	5

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference Number	FSCM	Fig. No.	Item No.
13216E1909	44940	28	9
13216E1910	97403	30	20
13216E1911	97403	11	33
13216E1912	97403	11	26
13216E1913	97403	11	29
13216E1914	97403	30	9
13216E1915	97403	26	19
13216E1916	97403	2	10
13216E1918	97403	26	6
13216E1919	97403	2	1
13216E1922	97403	11	27
13216E1925	97403	11	11
13216E1926	97403	5	6
13216E1927	97403	9	7
13216E1928	97403	9	6
13216E1929	97403	32	30
13216E1950	97403	16	13
13216E1951	97403	21	32
13216E1952	97403	21	3
13216E1953	97403	18	14
13216E1954	97403	18	18
13216E1955	97403	18	29
13216E1956	97403	18	6
13216E1958	97403	18	11
13216E1959	97403	18	17
13216E1960	97403	18	3
13216E1961	97403	19	15
13216E1962	97403	19	22
13216E1963	97403	19	16
13216E1964	97403	19	18
13216E1965	97403	19	21
13216E2000	97403	24	3
13216E2001	97403	24	46
13216E2005	97403	24	43
13216E2008	97403	24	44
13216E2010	97403	24	37
13216E2015	97403	24	36
13216E2018	97403	24	34
13216E2019	97403	24	27
13216E2020	97403	24	24

Reference Number	FSCM	Fig. No.	Item No.
13216E3335	97403	10	
	97403	11	
	97403	11	17
13216E3336	97403	10	
	97403	11	
	97403	11	21
13218E8062-2	97403	7	17
13219E0883	97403	15	54
	97403	21	29
194D1820	44940	24	6
2N3442	05277	15	54A
2W1-16-20-32	43999	7	25
204NF	81904	3	14
206	81904	GRP	3
232A1634	44940	24	20
3-3-47	81337	4	3
304A564	44940	20	4
310-3-1-8B	86782	7	23
323B568	44940	16	8
336A1423	44940	28	10
336A1675	44940	28	11
350-1129	44940	20	5
362	98804	20	17
4A084-2	81336	1	18
4A084-3	81336	1	18
505 AS	57733	13	28
526-53	44940	18	26
69-668	30554	9	1
69-668	30554	4	10
71-74936-7B	44940	16	7
73-0506-1	30554	28	16
73-0506-12	30554	25	25
73-0506-13	30554	26	16
73-0507	30554	13	27
	30554	17	42
7413737	00000	8	4
75-214836-78P	77820	16	9
7728882	18876	27	1
871-15	44940	18	19
871-40	44940	18	24

By Order of the Secretaries of the Army, the Navy, and the Air Force:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:
PAUL T. SMITH
Major General, United States Army
The Adjutant General

D. G. ISELIN
Rear Admiral, CEC, U. S. Navy
Commander,
Naval Facilities Engineering Command
DAVID C. JONES, *General, USAF*
Chief of Staff

Official:
JAMES J. SHEPARD, *Colonel, USAF*
Director of Administration

Distribution:
To be distributed in accordance with DA Form 12-25D, organizational maintenance requirements for Generator Sets, Engine Driven, 10 KW, 60 HZ, Utility, 10 KW, 400 HZ Precise Power.

☆ U.S. GOVERNMENT PRINTING OFFICE : 1989 O - 242-466 (3743)

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch
1 decimeter = 10 centimeters = 3.94 inches
1 meter = 10 decimeters = 39.37 inches
1 dekameter = 10 meters = 32.8 feet
1 hectometer = 10 dekameters = 328.08 feet
1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain
1 decigram = 10 centigrams = 1.54 grains
1 gram = 10 decigrams = .035 ounce
1 dekagram = 10 grams = .35 ounce
1 hectogram = 10 dekagrams = 3.52 ounces
1 kilogram = 10 hectograms = 2.2 pounds
1 quintal = 100 kilograms = 220.46 pounds
1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliliters = .34 fl. ounce
1 deciliter = 10 centiliters = 3.38 fl. ounces
1 liter = 10 diciliters = 33.82 fl. ounces
1 dekaliter = 10 liters = 2.64 gallons
1 hectoliter = 10 dekaliters = 26.42 gallons
1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch
1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches
1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch
1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	*To*	*Multiply by*
inches	centimeters	2.540
feet	meters	.305
yards	meters	.914
miles	kilometers	1.609
square inches	square centimeters	6.451
square feet	square meters	.093
square yards	square meters	.836
square miles	square kilometers	2.590
acres	square hectometers	.405
cubic feet	cubic meters	.028
cubic yards	cubic meters	.765
fluid ounces	milliliters	29.573
pints	liters	.473
quarts	liters	.946
gallons	liters	3.785
ounces	grams	28.349
pounds	kilograms	.454
short tons	metric tons	.907
pound-feet	newton meters	1.365
pound-inches	newton meters	.11375
ounce-inches	newton meters	.007062

To change	*To*	*Multiply by*
centimeters	inches	.394
meters	feet	3.280
meters	yards	1.094
kilometers	miles	.621
square centimeters	square inches	.155
square meters	square feet	10.764
square meters	square yards	1.196
square kilometers	square miles	.386
square hectometers	acres	2.471
cubic meters	cubic feet	35.315
cubic meters	cubic yards	1.308
milliliters	fluid ounces	.034
liters	pints	2.113
liters	quarts	1.057
liters	gallons	.264
grams	ounces	.035
kilograms	pounds	2.205
metric tons	short tons	1.102